

Important: Read all instructions prior to installation. SAVE THESE INSTRUCTIONS.

Magnetic Strip Light LED Retrofit Kit

Safety and Notes

- This product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures. Inspect wiring and components for damage before restoring power to the fixture.
- Avoid looking directly into the lamp when illuminated.
- Not intended for use with emergency lighting.
- Do not cover with thermally insulating material.
- Keep away from corrosive substances and liquid. Fixture must be kept dry and clean.
- Do not installed in a damaged fixture. Inspect fixture before installation and replace damaged parts.

Model	MRKDx
Operating Temperature	5°–113° F (-15°–45° C)

MRKD2-X2-SW3B36-2S



MRKD4-X2-SW3B36-2S, MRKD4-X2-SW3B60-2S




MRKD4-X2-SW3B60-3S



MRKD4-X2-SW3B60-4S




Installation

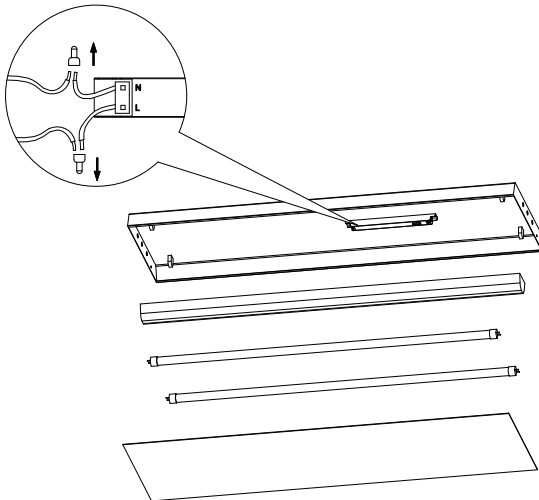

1. Disconnect power to the fixture at the circuit.
2. Remove old components such as covers, existing lamps, ballasts, and lampholder sockets, if applicable.
3. Carefully plan the positioning of the LED magnetic strip and external driver. Make sure input wires can reach the external driver.

Model	Mounting Distance
MRKD2-X2-SW3B36-2S	19.5 in. (495 mm)
MRKD4-X2-SW3B36-2S	43 in. (1.09 m)
MRKD4-X2-SW3B60-2S	
MRKD4-X2-SW3B60-3S	
MRKD4-X2-SW3B60-4S	

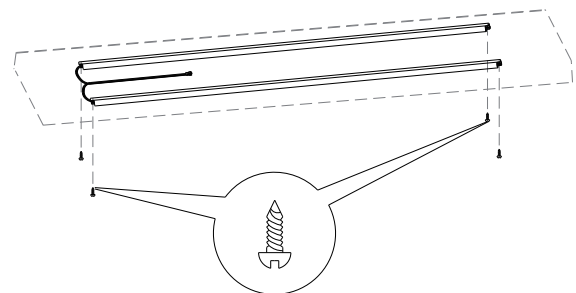

4. Mount Magnetic Strips: Attach the magnetic strips to the intended mounting surface. Use the self-tapping screws (provided) at both ends to secure.




Important: Read all instructions prior to installation. SAVE THESE INSTRUCTIONS.

MRKDx-X2-SW3Bx-x


Magnetic Strip Light LED Retrofit Kit

Installation (cont.)

Wiring Diagram

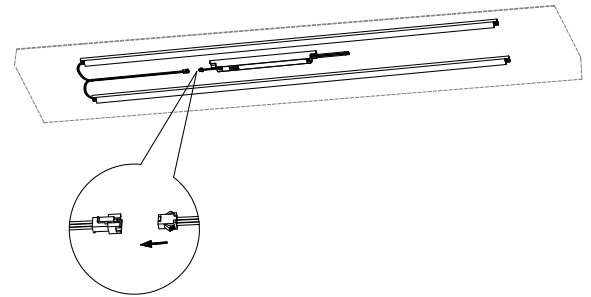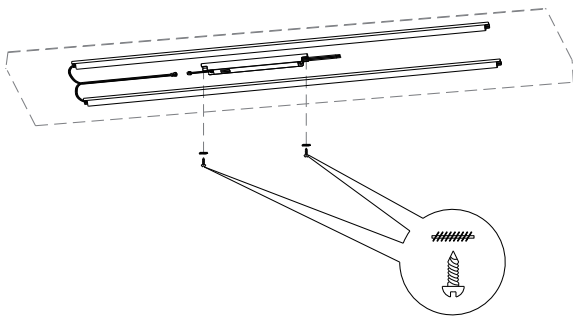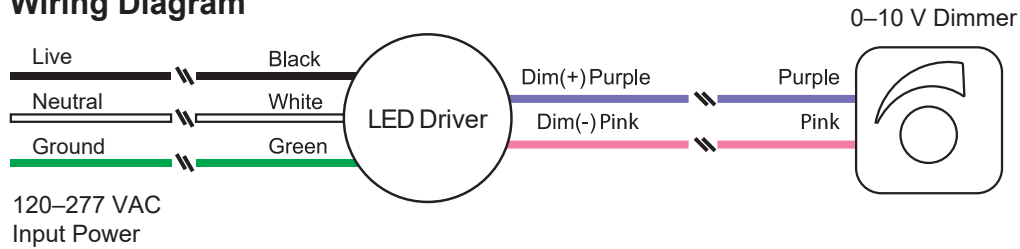


5. Mount the external driver on the desired surface and secure it with self-tapping screws (optional).
6. Connect the LED magnetic strip input leads to the external driver's output leads using the quick connector.
7. Select appropriate CCT and Wattage using the sliders on the driver.

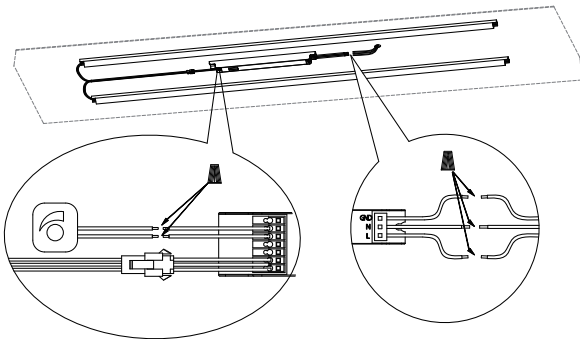

8. After securing all wire connections with wire nuts, replace the cover. Return supply power and test the fixture for functionality.

CCT and Wattage Select

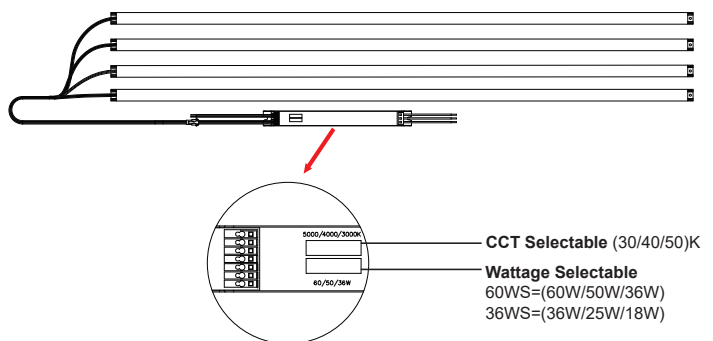

CCT Selectable (30/40/50)K

Wattage Selectable
 60WS=(60W/50W/36W)
 36WS=(36W/25W/18W)