

Important: Read all instructions prior to installation.

## LED Canopy Light




LCGP2-SW3B-SP50-S

### Safety and Notes


- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

### Wiring Diagram

#### 120–277 VAC Input

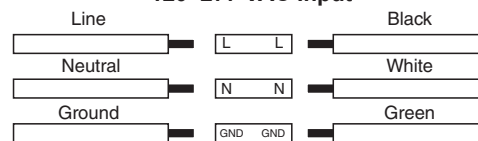

#### 0–10 V Dimming



### Specifications

#### Environmental Specifications





Operating Temperature	-40°–122° F (-40°–50° C)
IP Rating	IP65

Check product label for specific electrical specifications related to installation.

Improper installation will void warranty.

### Surface Mounting Installation

1. Turn off supply power. Cap any unused wires.
2. Remove retaining screw and slide mounting plate off of light.
3. Attach mounting plate to junction box or surface.
4. Make all wiring connections.
5. Slide lamp onto mounting plate.
6. Secure light with set screw.

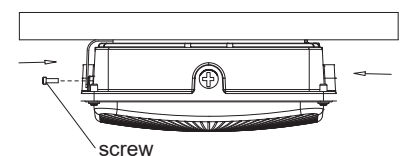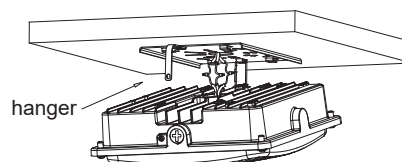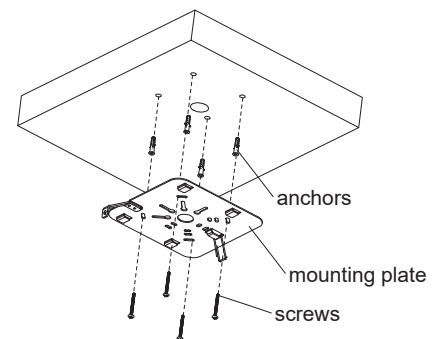


**Important: Read all instructions prior to installation.**

## LED Canopy Light


### Conduit Mounting Installation

1. Turn off supply power. Cap any unused wires.
2. Remove conduit plug.
3. Make all wiring connections.
4. Thread light onto conduit until secure.

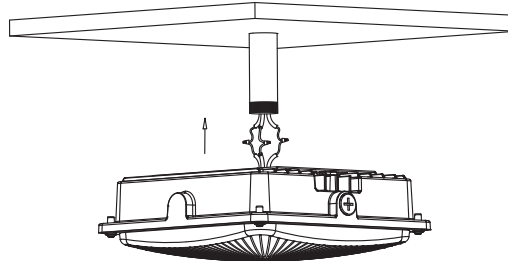


### CCT & Wattage Selection (LCGP2-SW3B-x models)


Set DIP switch using the combinations listed.

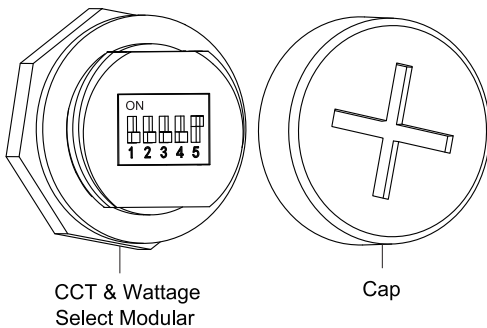


#### Wattage Select



100% (Default)




80%




60%

#### Photocell




Sensor OFF (Default)




Sensor ON


#### CCT Select



5000K (Default)



4000K



3000K