


Important: Read all instructions prior to installation.

Dimmable LED Panel Light

LPD5 Series

Dimensional Drawings

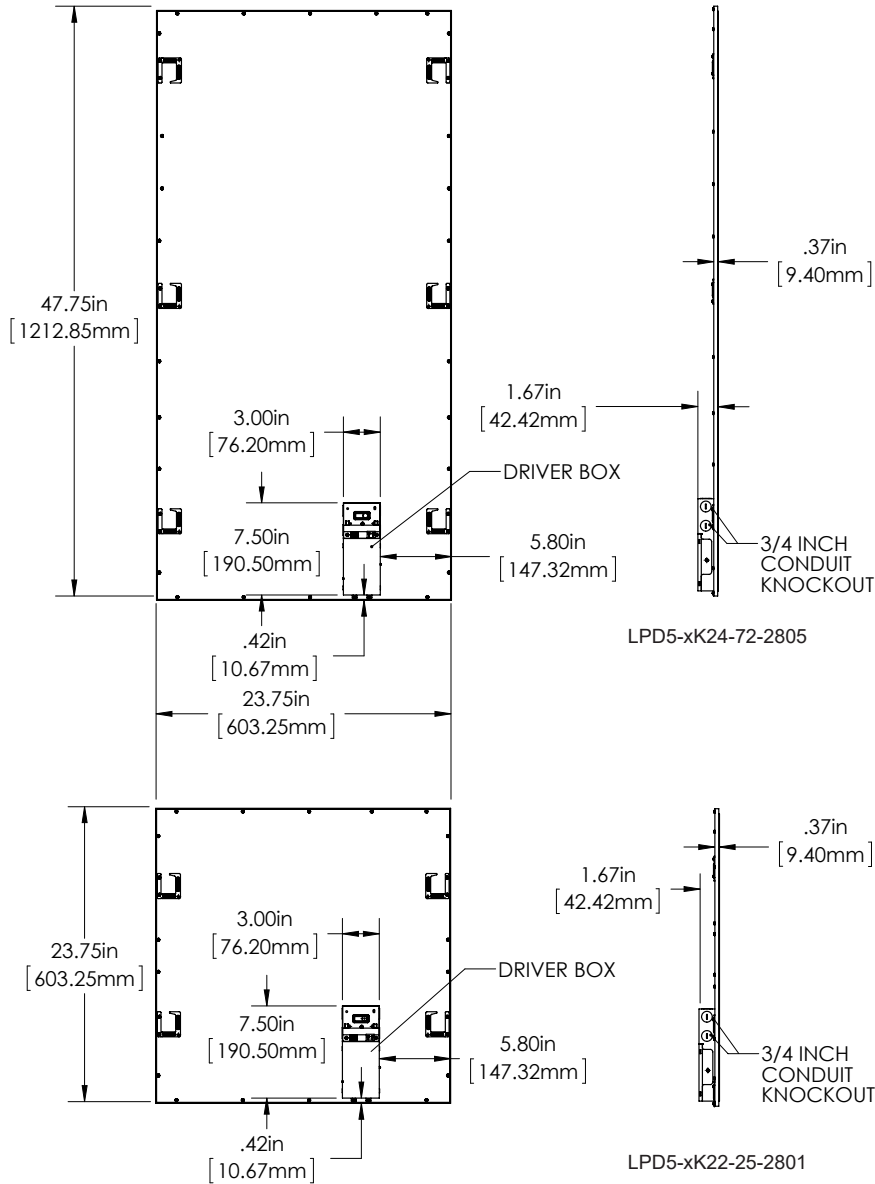

Dimmable LED Panel Light

LPD5 Series

User Manual



Important: Read all instructions prior to installation.

## Dimmable LED Panel Light

### Included Parts

- 1 - LED panel Light

### Recommended Accessories

- 0–10V Slide Dimmer (F019)
- 0–10V Knob Dimmer (A019)


### Specifications

Model	LPD5-xK22-25-2801	LPD5-xK24-72-2805
Operating Voltage	100–277 VAC	
Rated Power Consumption	25 W	72 W
Current Draw	208mA @ 120 VAC	600mA @ 120 VAC
Beam Angle	120 degree	
Dimmable	0–10 V	
Operating Temperature	-4°–113° F (-20°–45° C)	
Product Weight	7.28 lb (3.3 kg)	13.66 lb (6.2 kg)
IP Rating	IP40	

### Safety Information

- Product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into the light when illuminated.
- Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility. A safety cable is not included, but it is recommended that one be connected to grid clip during installation.


### Wiring Diagram

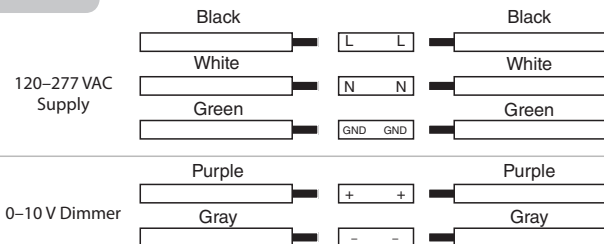

### Drop Ceiling Installation


1. Turn supply power to circuit off. If installing as a retrofit, remove existing fixture.
2. Open driver box and remove knockout(s) for wiring. Make electrical connections using wiring diagram. Once complete, resecure driver box cover.

FIG 1

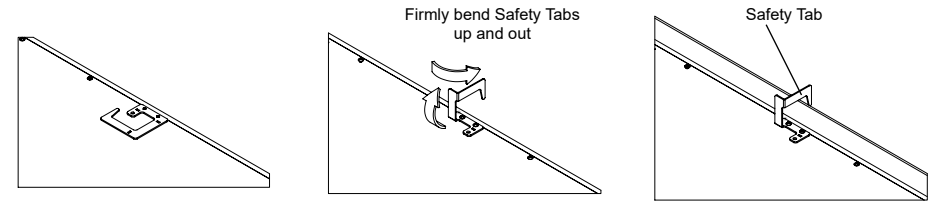

3. Bend out safety tab to be vertical, then upper portion out 90 degrees. It is recommended that a safety cable (included) be installed to anchor the fixture as well.
4. Lay fixture into T-grid.

FIG 2

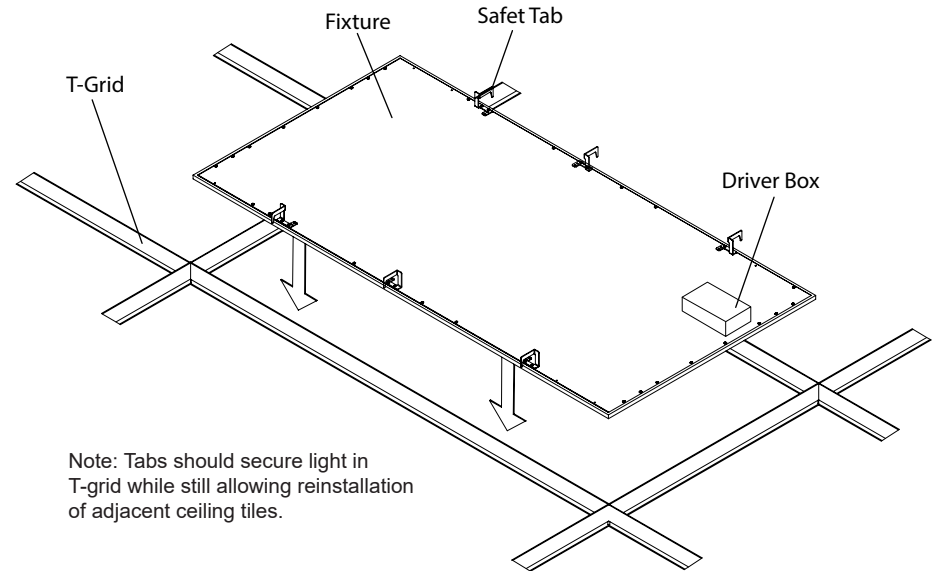

Note: Tabs should secure light in T-grid while still allowing reinstatement of adjacent ceiling tiles.