


Light efficiency:



Output: 21247 lm

Light quality:




Peak: 12133 cd

Color temperature:



Power: 153.6 W

PF: 0.99

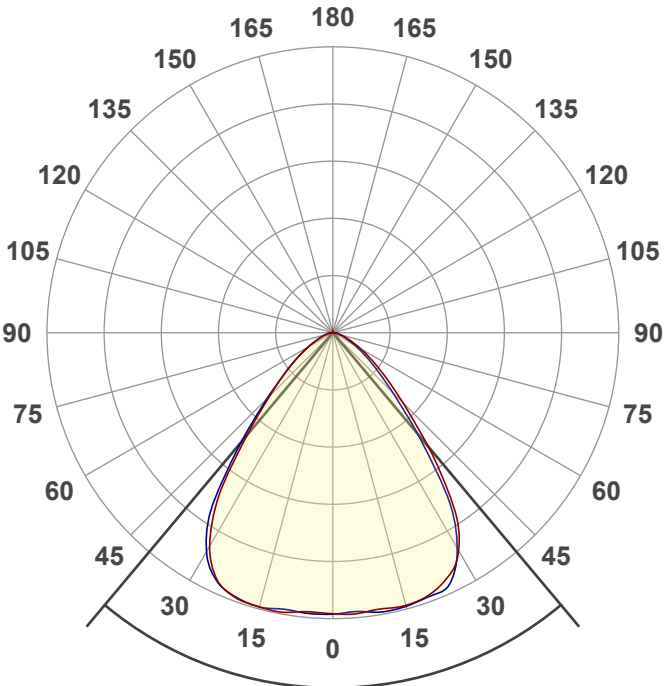


Product name:  
**UHBD-S1-50K150-80H**  
Date and time:  
**12/1/2022 10:14:09 AM**

Beam angle **79.9°**




CIE 1931  
x: 0.342  
y: 0.351

Spectra


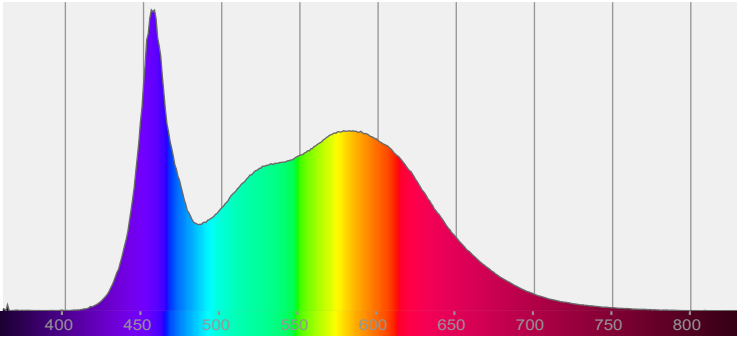


Power

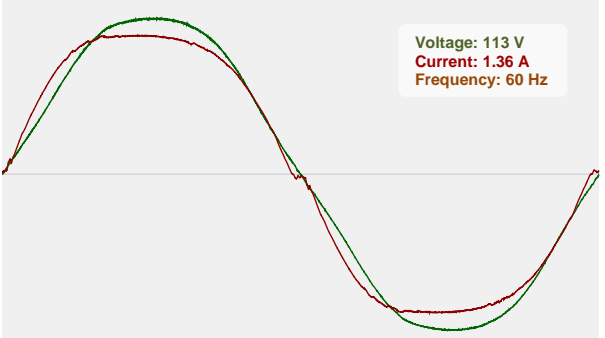



T 314.743.3067  
F 314.972.6202  
email: [commercial-sales@superbrightleds.com](mailto:commercial-sales@superbrightleds.com)  
[www.superbrightleds.com/](http://www.superbrightleds.com/)

## Color Specifications

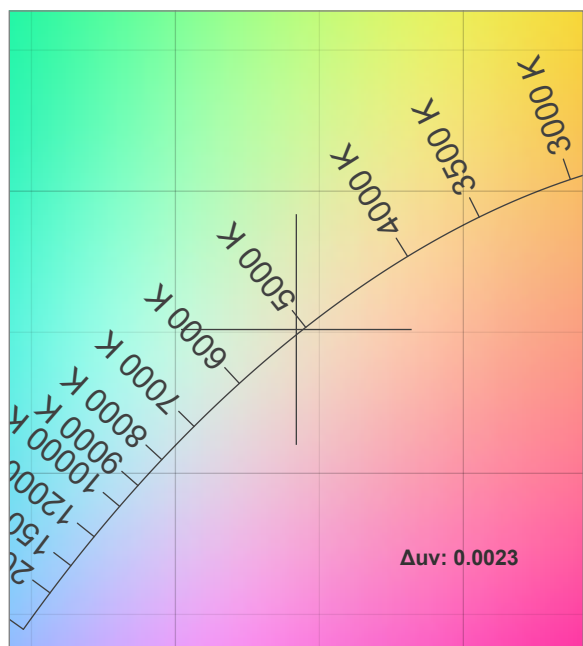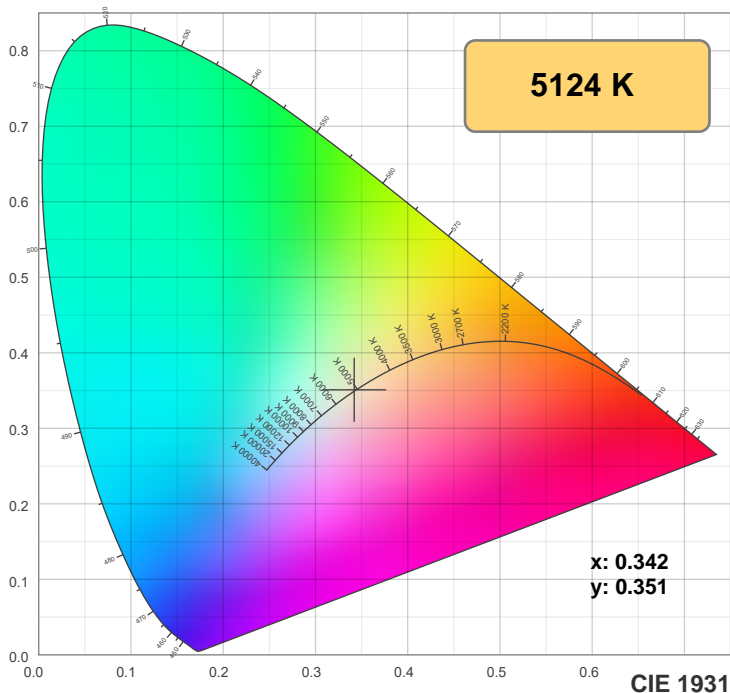

**TM30: 82.7**

**CRI: 83.2 (R1-R8)**

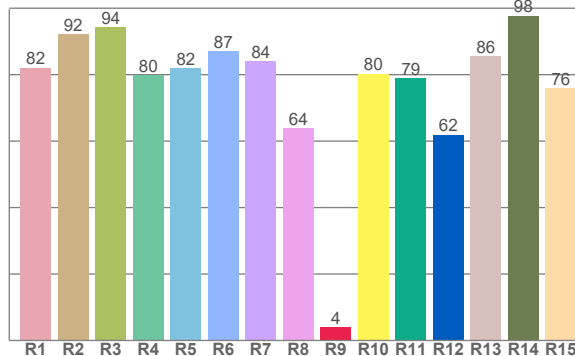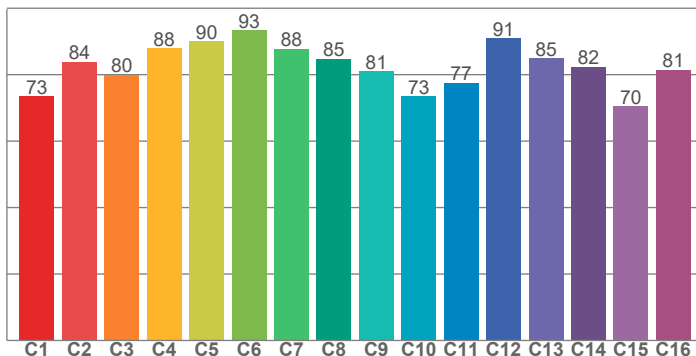

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82.1	92.2	94.4	79.8	82.0	87.0	84.1	63.9	4.0	80.3	79.0	61.9	85.6	97.7	75.9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
73.4	83.8	79.9	87.9	90.1	93.3	87.8	84.8	81.0	73.4	77.4	91.0	84.9	82.3	70.5	81.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79.2	97.4	79.3	71.4	75.8	78.6	83.5	88.0	97.4	89.0	82.9	80.2	79.5	68.7	72.9

**CQS: 79.9**

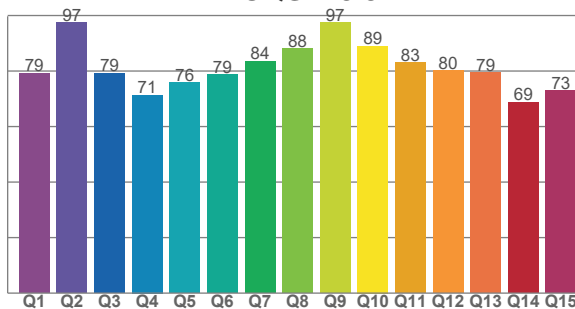

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color division from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5124 K	83.2	4.0	82.7	92.6	79.9	0.342	0.351	0.210	0.323	0.0023









### TM30 Report


**Rf 82.7**  
Fidelity index Rf

**Rg 92.6**  
Gammut index Rg

Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	73	-14%	1%
2	84	-8%	6%
3	80	-4%	10%
4	88	-2%	4%
5	90	-3%	2%
6	93	-2%	-2%
7	88	-8%	-1%
8	85	-9%	5%
9	81	-8%	12%
10	73	-3%	16%
11	77	4%	13%
12	91	5%	0%
13	85	7%	-10%
14	82	1%	-11%
15	70	0%	-25%
16	81	-9%	-6%

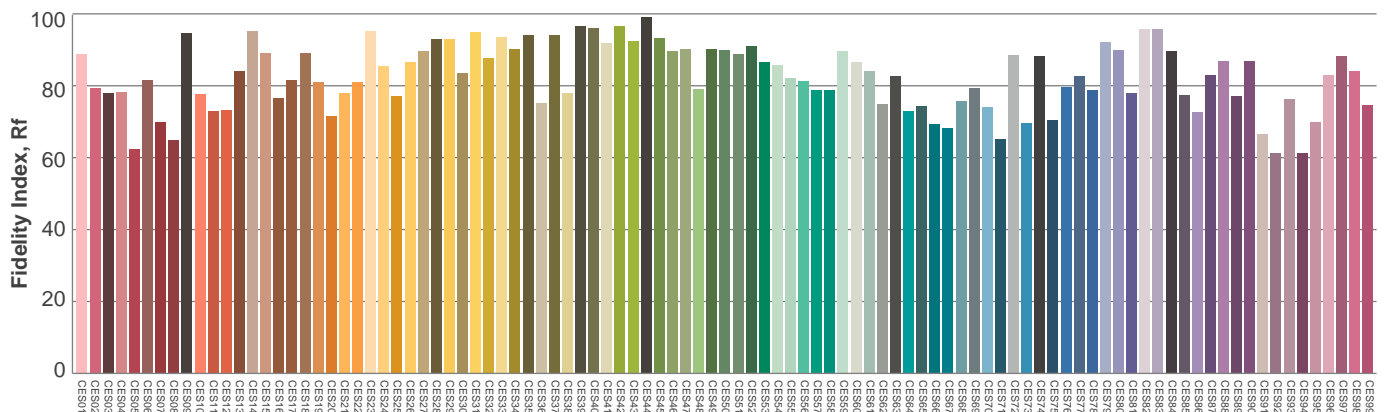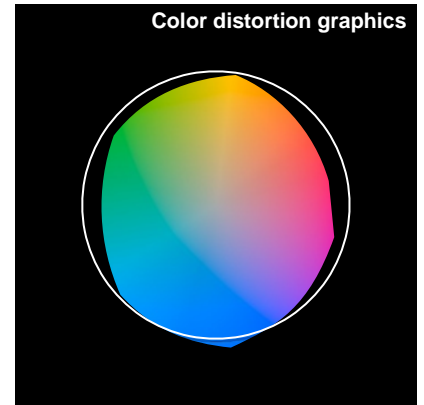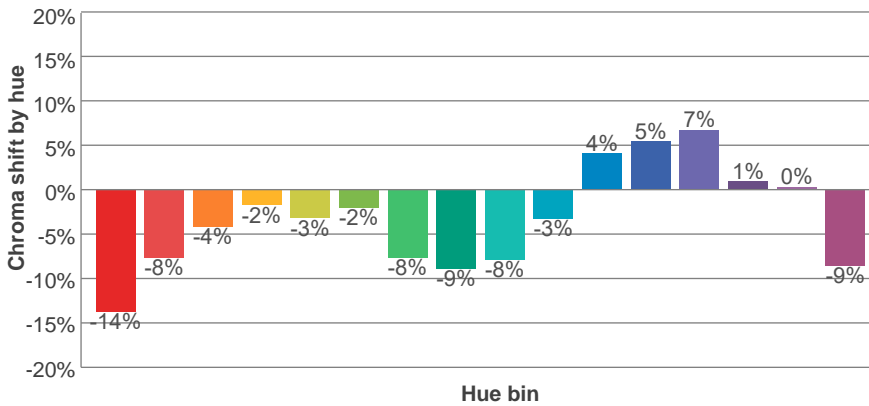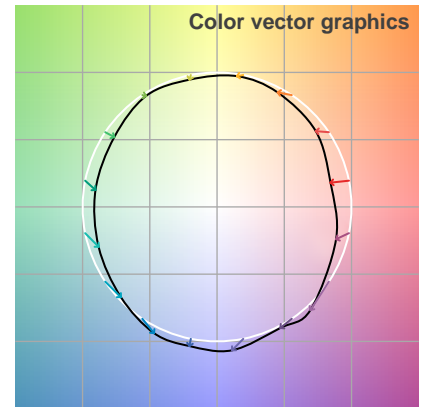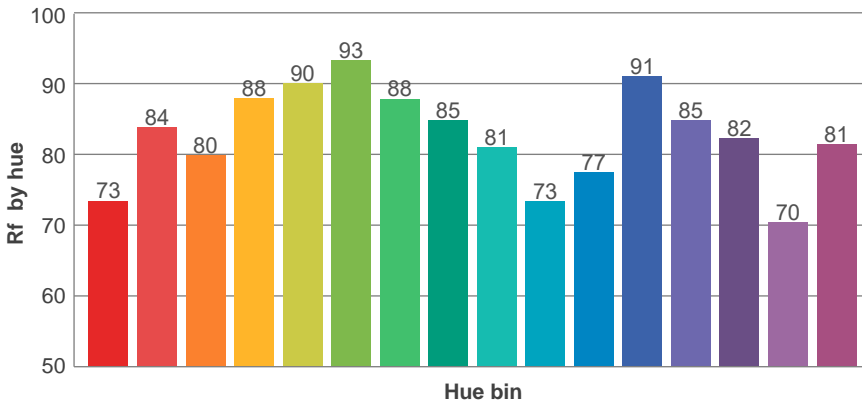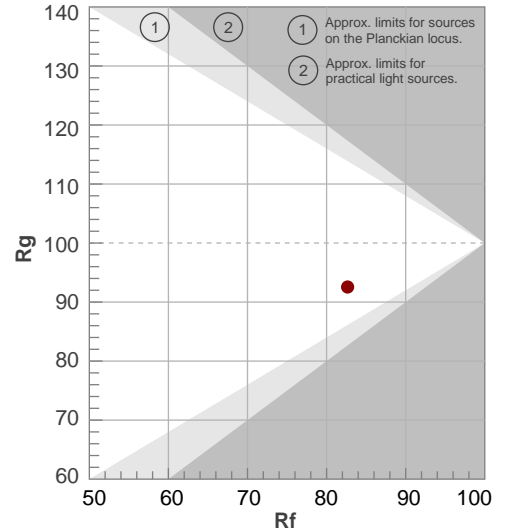

**Illumination**

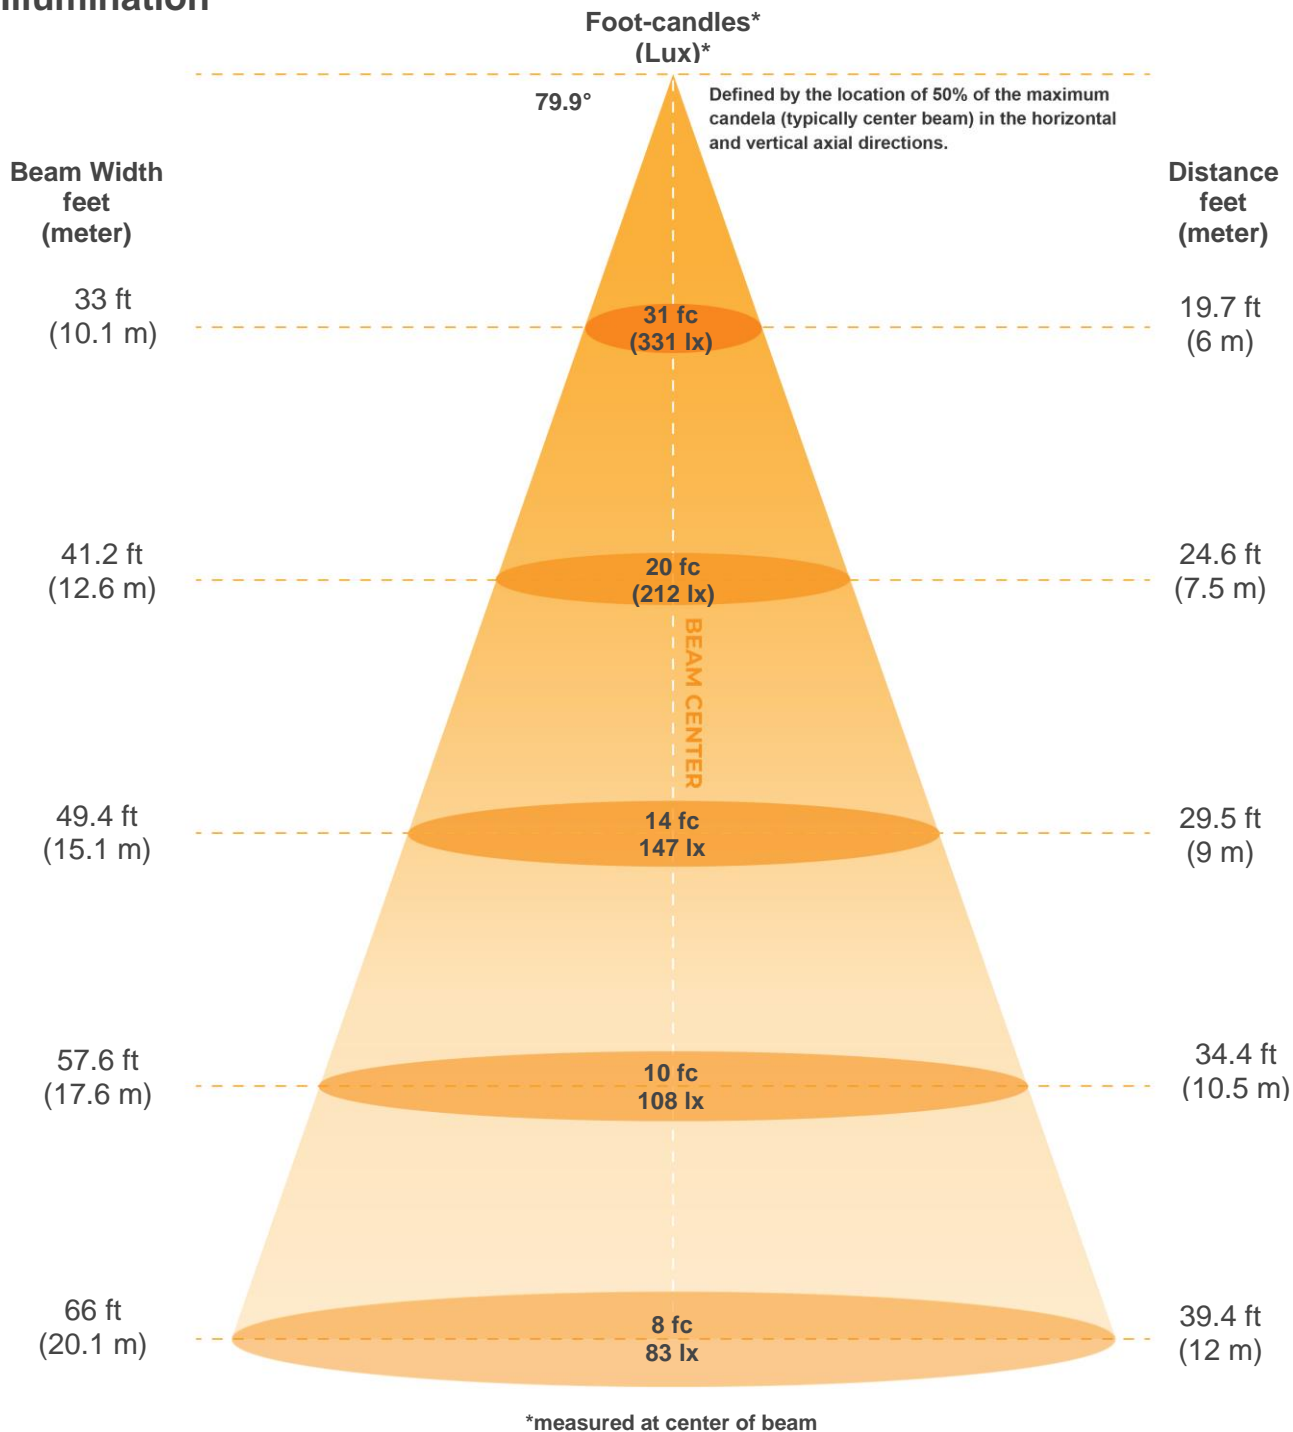

**Beam intensities from 1-20m**


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
11927lx	2982lx	1325lx	745lx	477lx	331lx	243lx	186lx	147lx	119lx	99lx	83lx	71lx	61lx	53lx	47lx	41lx	37lx	33lx	30lx
1108.1f	277fcd	123.1fc	69.3fcd	44.3fcd	30.8fcd	22.6fcd	17.3fcd	13.7fcd	11.1fcd	9.2fcd	7.7fcd	6.6fcd	5.7fcd	4.9fcd	4.3fcd	3.8fcd	3.4fcd	3.1fcd	2.8fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
<b>79.9°</b>	<b>120.5°</b>	<b>150.2°</b>	<b>93.9%</b>	<b>79.7%</b>



ISO Diagrams

ISO candela diagram

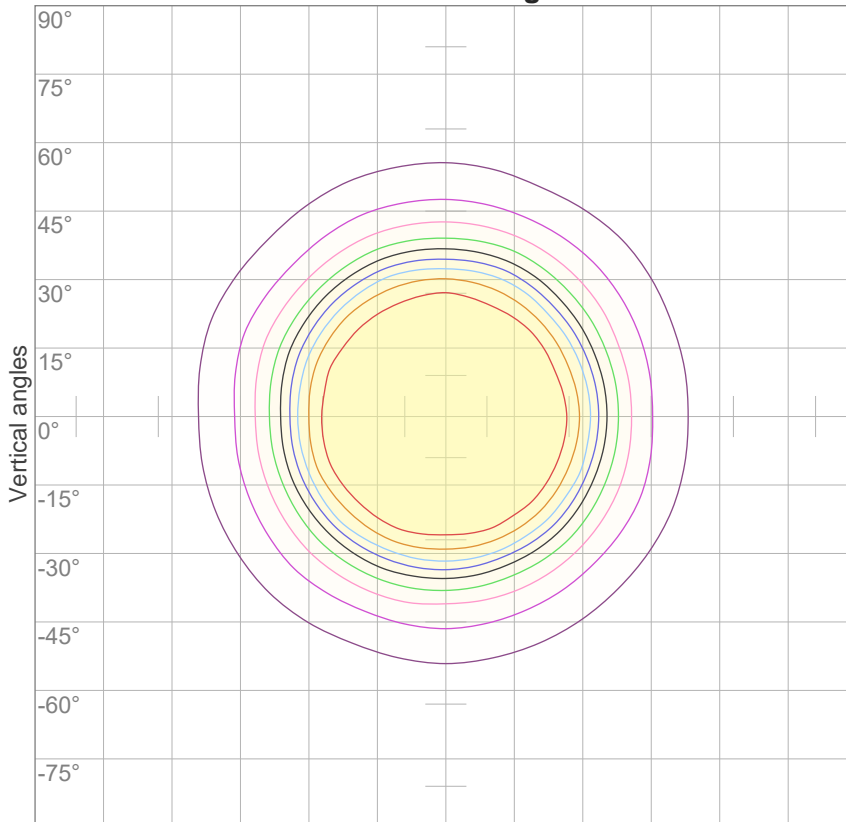

10%	1193 cd
20%	2385 cd
30%	3578 cd
40%	4771 cd
50%	5963 cd
60%	7156 cd
70%	8349 cd
80%	9542 cd
90%	10734 cd


Conditions:

Number of c-planes: 16

Candela at center: 11927 cd

Horizontal angles

ISO lux diagram

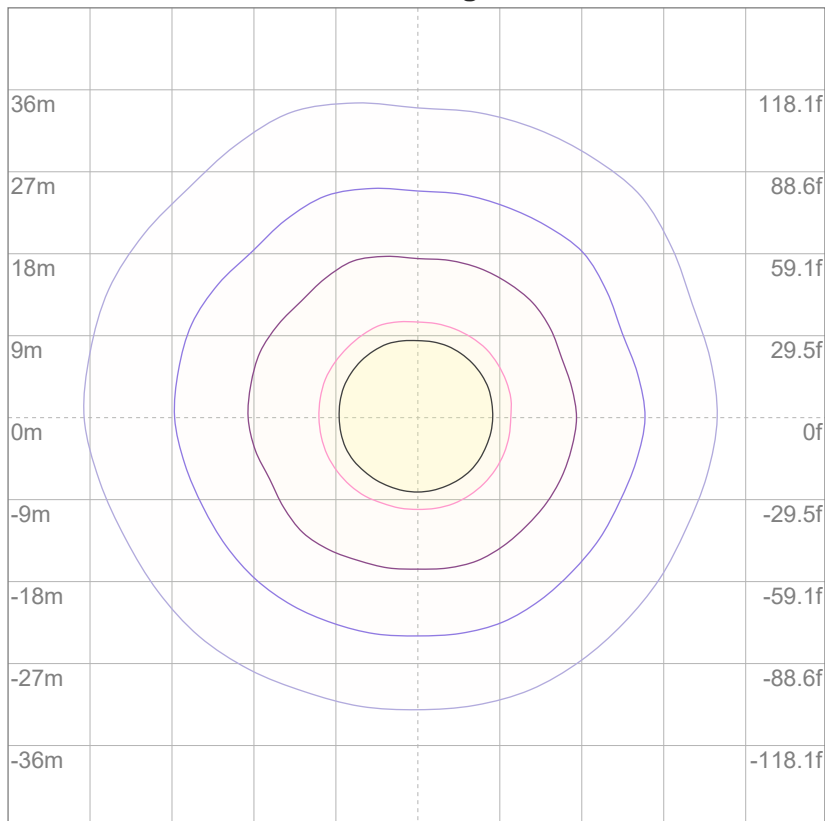

3%	3.58 lx
5%	5.96 lx
10%	11.9 lx
30%	35.8 lx
50%	59.6 lx

Conditions:

Number of c-planes: 16

Lux at center: 119 lx

*Lux distribution on a surface when lamp is mounted at 10 meters from the surface.*

Mounting height: 10 meters (33 feet) UGR




## Light Planning

### Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
<b>RCR</b>	<b>(RCR: Room Cavity Ratio)</b>																	
	Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	99	97	98	96	94	94	93	92	90
2	104	98	93	89	102	96	91	87	93	89	85	90	86	84	87	84	82	80
3	97	89	83	78	95	87	82	77	85	80	76	82	78	74	80	76	73	71
4	91	81	74	69	89	80	73	68	77	72	67	75	70	67	73	69	66	64
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58
6	79	68	61	55	77	67	60	55	66	59	55	64	58	54	62	58	54	52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	49	58	53	49	47
8	70	58	51	46	68	57	50	46	56	50	45	55	49	45	54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	42	51	46	41	50	45	41	40
10	62	50	43	39	61	50	43	39	49	43	38	48	42	38	47	42	38	37

LAMPS (number of lamps)

### Luminaire budgetary diagram

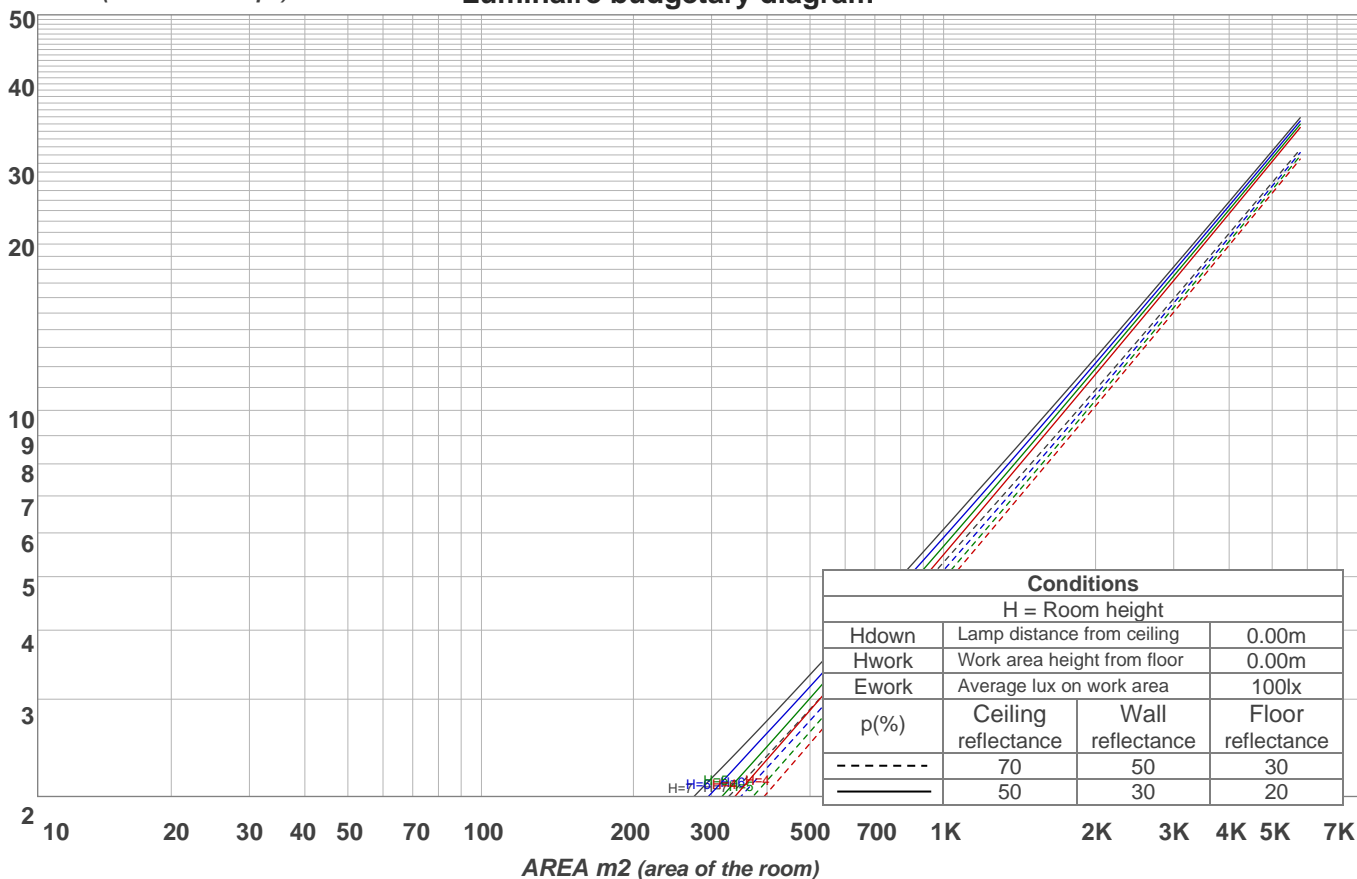

### Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
1141 lm	3400 lm	5280 lm	5285 lm	3161 lm	1688 lm	813 lm	331 lm	71.5 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
5.70 lm	6.71 lm	8.54 lm	10.0 lm	12.2 lm	12.3 lm	10.8 lm	7.54 lm	2.75 lm




**Road Report**

**LCS table**


BUG rating:	B4 U3 G2	
<b>Forward light</b>	Lumens	Lumens %
Low(0-30):	4894.6	23%
Medium(30-60):	5194	24.4%
High(60-80):	599.8	2.8%
Very high(80-90):	40.6	0.2%
<b>Back light</b>		
Low(0-30):	4914	23.1%
Medium(30-60):	4944.3	23.3%
High(60-80):	548.3	2.6%
Very high(80-90):	33.2	0.2%
<b>Uplight</b>		
Low(90-100):	6	0%
High(100-180):	70.8	0.3%

**LCS graph**

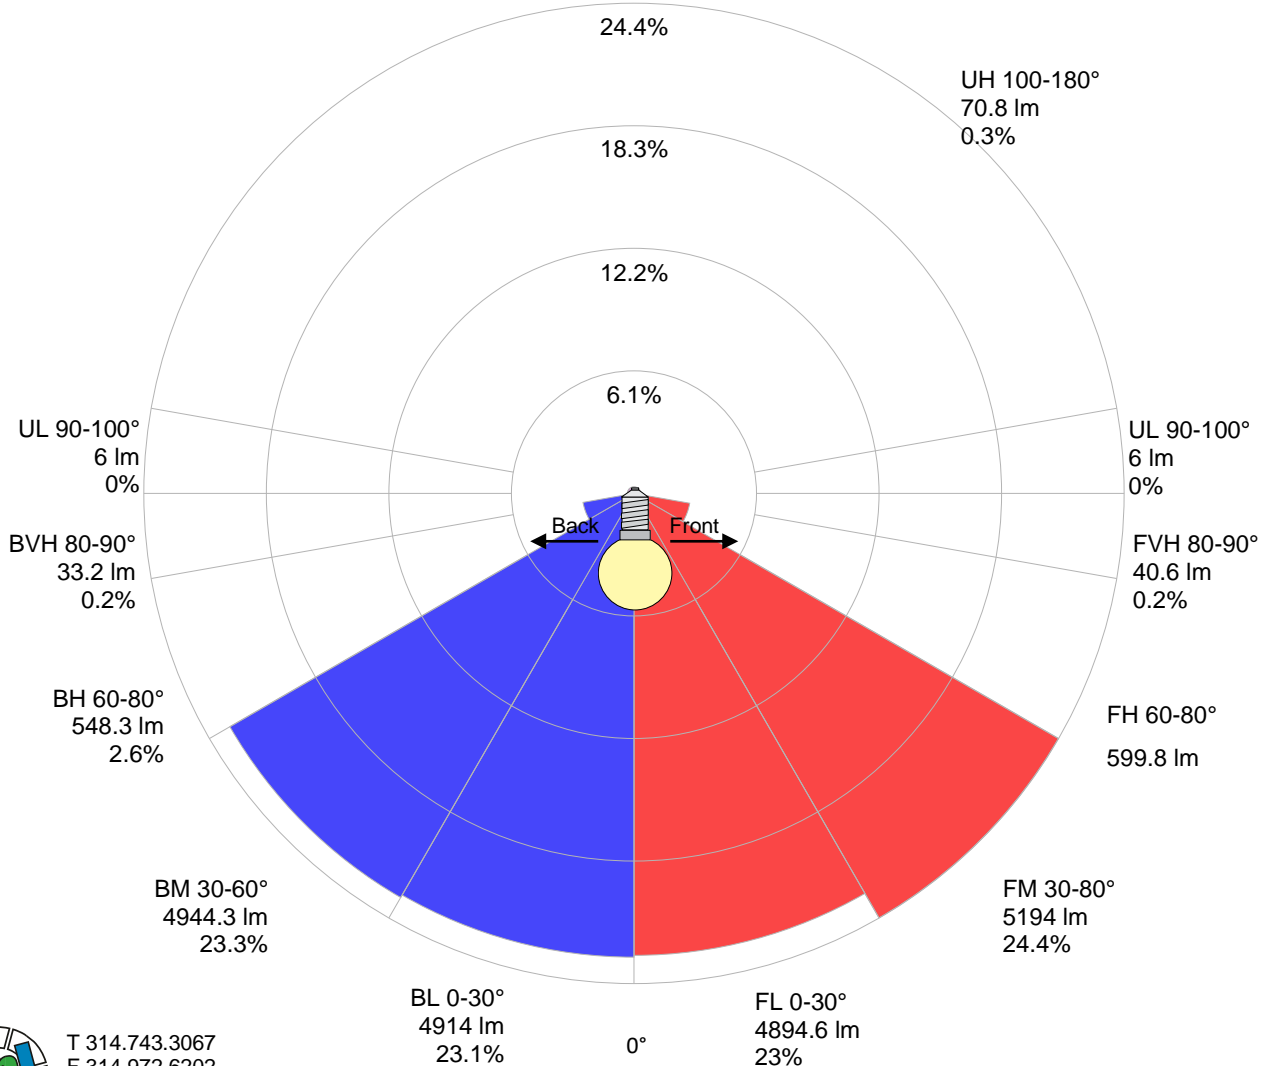

**Stabilization**

**Warmup curve**

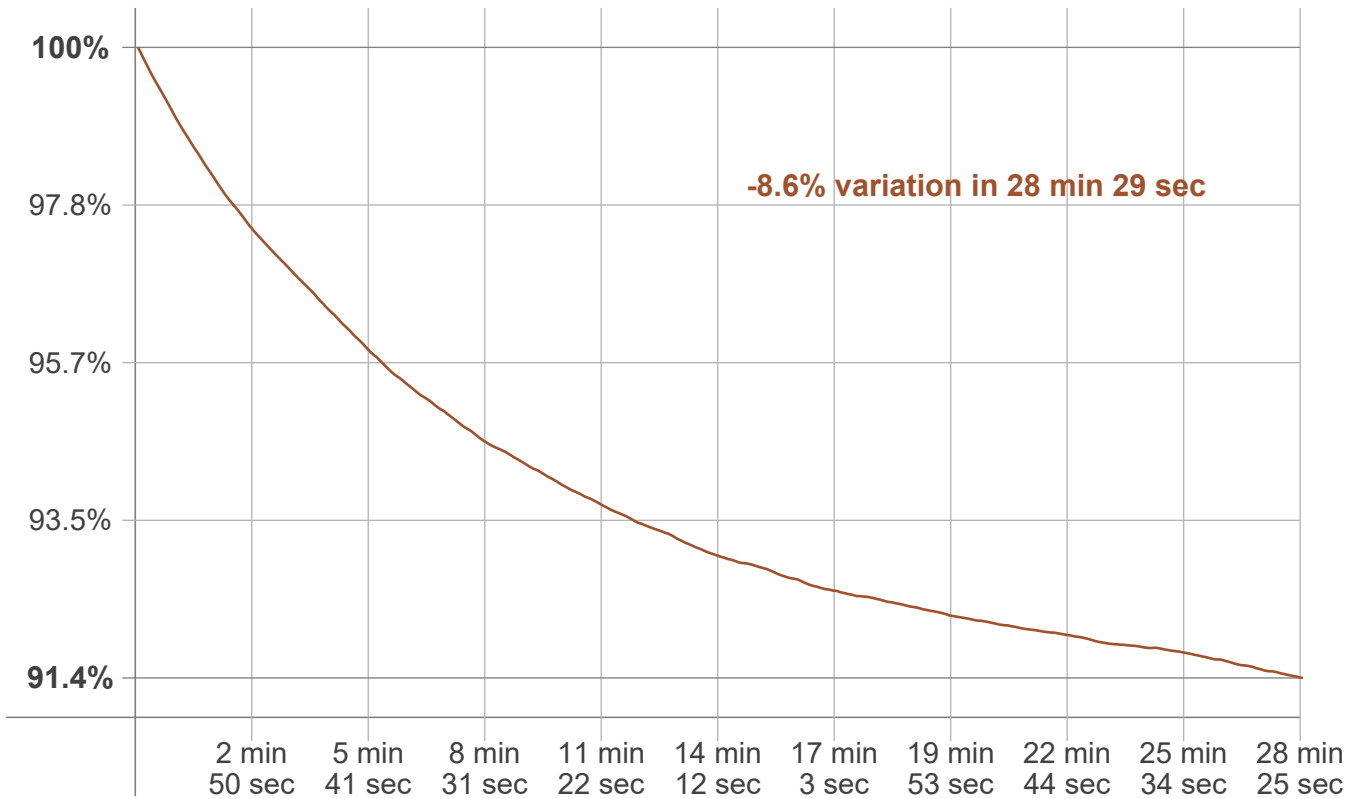

**Warmup result**

<b>Warmup time:</b>	<b>Lamp stabilized in 28 min 29 sec</b>
<b>Warmup variation</b>	<b>-8.7%</b>

**Warmup conditions**

<b>Stable period:</b>	<b>15 min</b>
<b>Stable change max:</b>	<b>2.0%</b>
<b>Minimum time:</b>	<b>15 min</b>

**Color temperature change**

CCT start	CCT change	CCT end
5031 K	+93 K	5124 K

**Output change**


Output start	Output change	Output end
23224 lm	-1977 lm	21247 lm






## Flicker Specifications


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

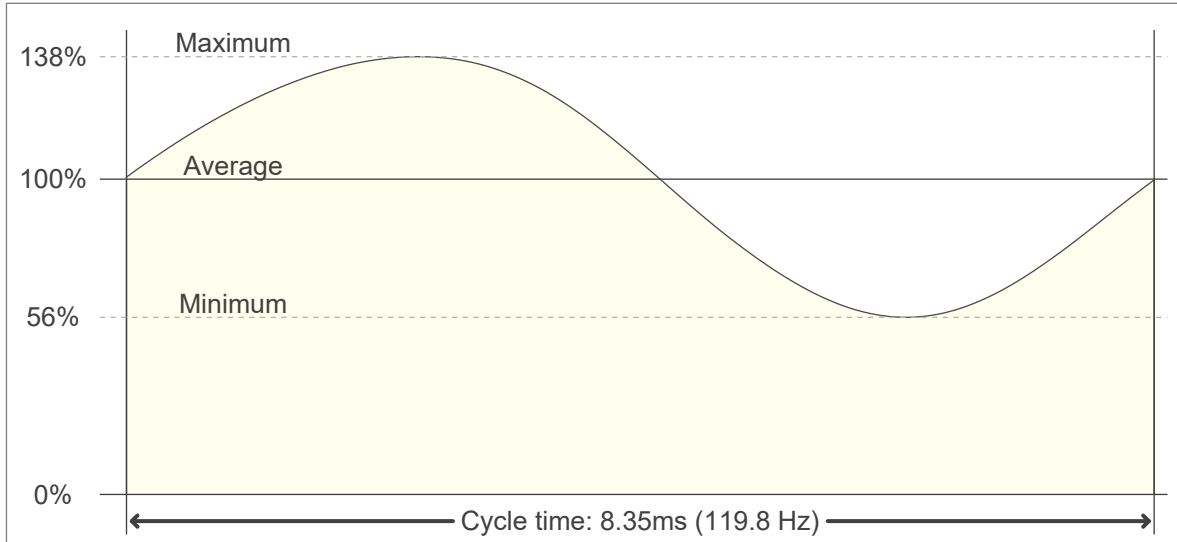

Flicker FFT (frequency scope of flicker curve)

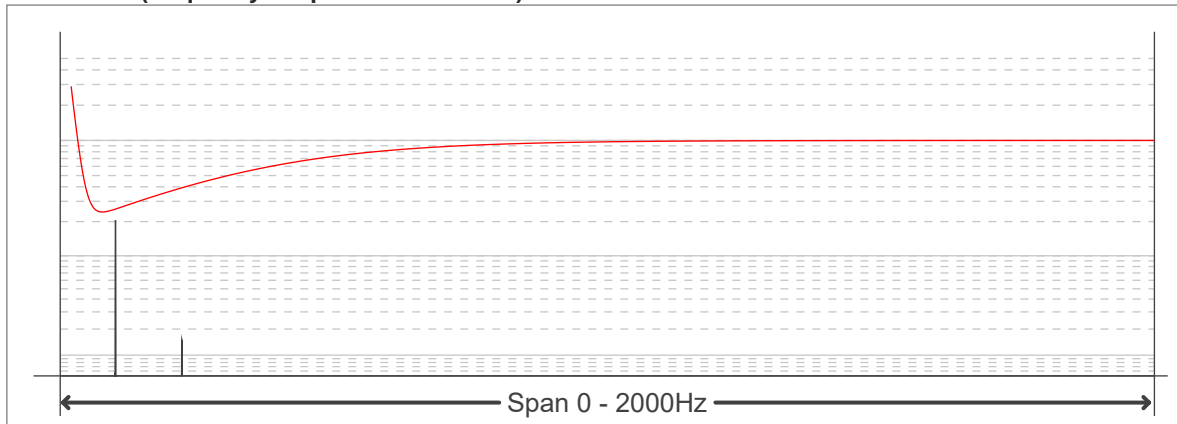

**Flicker results:**

<b>Flicker frequency:</b>	<b>119.76 Hz</b>
<b>Flicker index:</b>	<b>0.13</b>
<b>Flicker percentage:</b>	<b>42.45 %</b>
<b>SVM: (Visual flicker)</b>	<b>1.49</b>

**Flicker conditions:**

<b>Sample rate:</b>	<b>20000 samples/second</b>
---------------------	-----------------------------

