


Important: Read all instructions prior to installation.

Fan (Loading Dock Light Accessory)

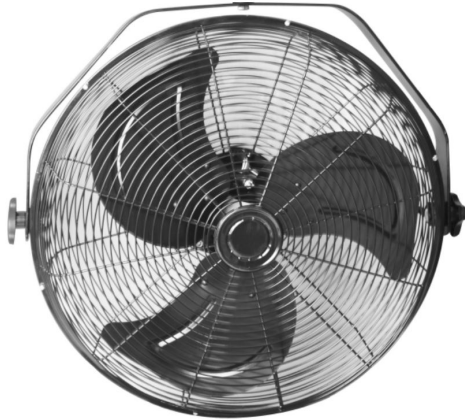

FGD-18A

Safety and Notes

- Product should be installed and serviced in accordance with applicable national, state, and local building and electrical codes.
- Ensure all mounts are securely attached and will support the weight of the fan. Failure to properly support fan may result in damage or injury, for which the manufacturer does not assume responsibility.
- Check that voltage corresponds with the rating of the appliance before operating.
- To protect against electric shock, do not immerse cords, plugs, or fan in water or any other liquid.
- Do not leave unattended while in operation.
- Close supervision is necessary when used by or near children.
- Unplug from outlet when not in use or before cleaning. Allow to cool before putting on or taking off any parts.
- Do not operate the fan with a damaged cord or plug, or after fan has been damaged in any manner. If the supply cord or fan is damaged, it must be replaced by the manufacturer or serviced by a qualified electrician in order to avoid hazard.
- The use of accessory attachments not recommended by the manufacturer may cause injuries.
- Do not use outdoors.
- Do not let the cord hang over the edge of a table or counter or let it come into contact with any hot surfaces.
- To disconnect, remove the plug from the outlet. Do not pull plug out by the cord.
- Do not use this product for anything other than it's intended use.
- No liability can be accepted for any damaged caused by noncompliance with these instructions or any other improper use or mishandling.
- Do not use the fan without protective grills.
- Do not attempt to force the grill in order to make the fan turn or stop.
- Never put objects into grill.
- To reduce risk of fire or electrical shock, do not use this fan with any solid state speed control device.

Specifications

Check product label for specific electrical specifications related to installation.
Improper installation will void warranty.

Mounting (Loading Dock Light)

1. Turn off supply power
2. Align U-bracket to loading dock arm mounting hole.
Note: Loading dock LED light fixture can be mounted simultaneously.
3. Using hardware, attach fan to arm.
4. Plug in power cord into 120 VAC outlet on arm and secure any excess cable.

