


Important: Read all instructions prior to installation.

Adjustable LED Retrofit High / Low Bay Lamp

Safety and Notes

- Product should be installed by certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into the lamp when illuminated.
- Designed for direct wire installation only, bypassing existing ballasts where applicable.
- Each of the 4 adjustable sides can be set to 90 degrees up or facing straight down. Be careful and do not use excessive force when repositioning as this may damage the housing.

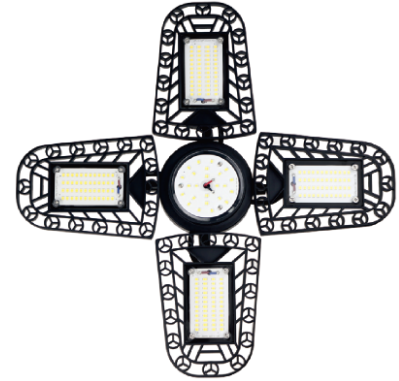

Specifications

Model	HBA-50K80-E26C	HBA-50K80-E39C
Base Type	E26/E27	E39
Operating Temperature	-40°–131° F (-40°–55° C)	

Check product label for specific electrical specifications related to installation.
Improper installation will void warranty.

Retrofit Installation Instructions

This lamp should be used to replace existing incandescent, HPS/HID, and CFL lamps with an E39 or E26/E27 base (depending on model) only. If used in accordance with these instructions on a UL or ETL Listed light, the light will retain its original certification.

Caution: When removing ballast, this product must be installed in accordance with the applicable installation code by a qualified electrician familiar with the construction and operation of the product and the hazards involved.

Retrofit Modification Label

When installed as a retrofit, label containing the following caution needs to be placed onto the original fixture and in a location that is visible during maintenance.

Caution Risk of Injury or Damage:

This luminaire has been modified to operate LED lamps. Do not attempt to install or operate incandescent, HPS/HID, or CFL lamps in this luminaire.

Retrofit Wiring Diagram

