


Ref. nr. 1576

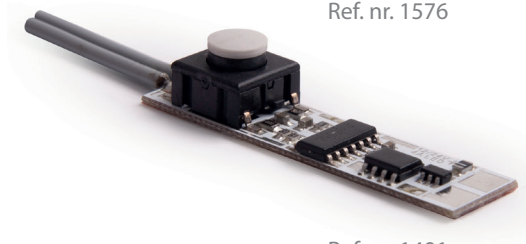

Ref. nr. 1491

TECHNICAL SPECIFICATION

Function	switch on/off
Input voltage	12-24V DC
Output current	max. 4A
Power output	48W/12V, 98W/24V
Dimensions	43mm x 11mm x 9mm
Operational temperature range	-20°C ... +55°C

PRODUCT DESCRIPTION

The Micro Switch is designed to be used in KLUS LED Linear fixtures. It is dedicated for switching LED lights on/off with the use of an "on" and "off" button.

The bottom of the Micro switch is equipped with tape that allows secure mounting of the switch and additionally cools down the switch when mounted into an extrusion.

CAUTION

- Do not bend the base of proximity switch as it may damage the device.
- Switching the main power on/off will cause the lit LED fixtures operated by the Micro switch to be turned "off".
- When mounting the Micro Switch into extrusions 11 mm deep, the MW base must be used along with MW end caps.
- To be used with non-dimmable drivers only

APPLICATION

The Micro switch is dedicated to be mounted into fixtures mounted especially (but not only) under cabinets, shelves as well as well in sconces , portable LED lamps, desks lamps and floor lamps.

TECHNICAL DRAWING

