



WP-15K22-BK-A



Overview

The 22W Amber LED Turtle-Friendly Full Cutoff Wall Pack provides nighttime visibility with minimal ecological impact. With its full cutoff design and 590-610 nm wavelength amber light, the wall pack protects marine life. The 110° by 95° beam has a wide Type III distribution delivered through a clear, polycarbonate lens. Each wall pack has a die-cast aluminum housing available in a black or white finish. Their waterproof design is suitable for wet locations and is ideal for beachfront and coastal areas.

Features

- 590nm amber light designed to protect marine life
- Full cutoff design casts light away from the night sky
- Type III light distribution with a 110° x 95° beam
- Corrosion-resistant aluminum construction

Product Details

- Black or white die-cast aluminum body with polyester powder coat
- Clear polycarbonate lens
- Suitable for wet locations
- Wide Type III light distribution
- 590nm amber light protects marine life
- 120-277 VAC

Warranty

- 5-year warranty

Available Models¹

- WP-15K22-BK-A
- WP-15K22-WH-A

Part Number Breakdown

Example: WP-15K22-BK-A

Family	CCT	Wattage	Finish	LED
WP	15K [1500K]	22 [22 W]	BK [black]	A [amber, 590-610 nm]
			WH [white]	

Applications

- Beachfront Properties
- Docks
- Parking Garages
- Residential Lighting
- Resorts
- Retail Shops
- Wall Packs



Certifications and Compliances

- Certified by UL - UL 1598 (IFAM)



¹Contact customer service if interested in other options.

Dimensional Drawing

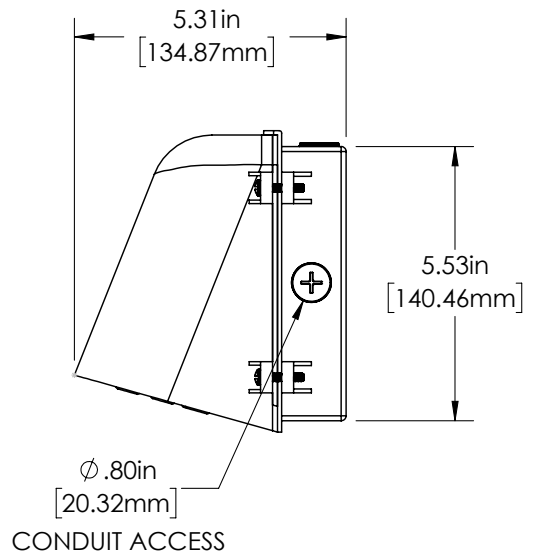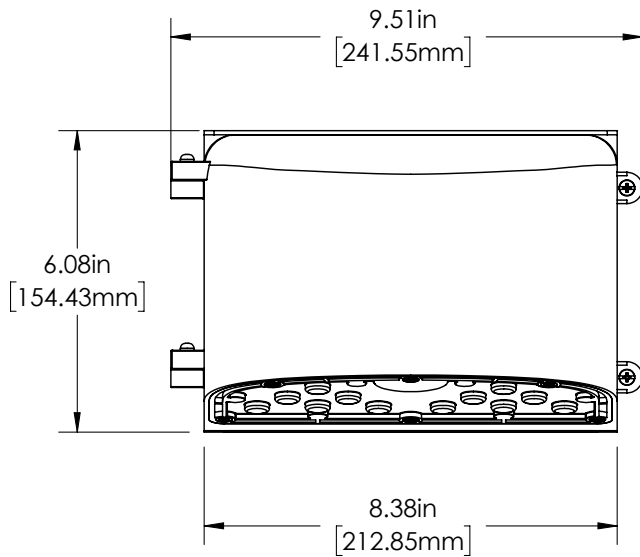

Specifications

Model	WP-15K22-BK-A	WP-15K22-WH-A
Finish	Black	White
Operating Voltage	120-277 VAC	
Power Consumption	22 W	
Current Draw	120 VAC	200 mA
	277 VAC	85 mA
Efficacy	23 lm/W	
Lumens	500 lm	
Color Temperature	1500K	
LED Color	Amber (590-610 nm)	
Beam Angle	110° x 95° (Type III distribution)	
Dimming	0-10V	
Environmental Rating	Suitable for wet locations	
Surge Protection	4 kV	
Rated Life (L70)	50,000 hours (@40°C)	
Ambient Operating Temperature	-40°-113° F (-40°-40° C)	

