superbrightleds.com

User Manual

Important: Read all instructions prior to installation.

LFA-HAx Series

LED Hardscape Light

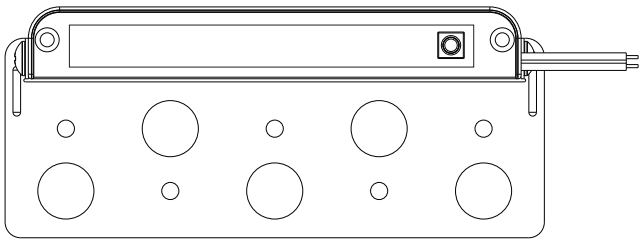

Specifications

Environmental Specifications	
Operating Temperature	-4°–104° F (-20°–40° C)
IP Rating	IP66

Color/CCT/Mode Selection

Use the button on the lens to cycle between single white CCT(s), single colors, and preprogrammed modes. Options vary by model.

Safety and Notes

- Do not operate this product under any conditions other than those for which it is specified. Failure to observe these precautions can lead to electrical shock, product failure, or other problems.
- Turn power off from electrical panel before installation or maintenance.
- For use with outdoor, low-voltage landscape lighting systems ONLY.
- Power supply voltage must match fixture.
- Not for use with submersible or pool/spa equipment. Do not submerge in water, the product can be damaged.
- Do not modify this fixture. Any modification may render the product unsafe and void the warranty.

Recommended Accessories

Part Number	Description
WWN-x	silicone-filled twist-on wire connector
WP14-2DB	14-gauge landscape wire
WP12-2DB	12-gauge landscape wire

Installation Instructions
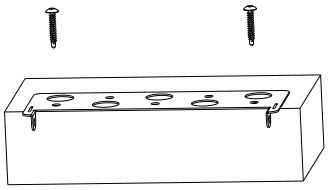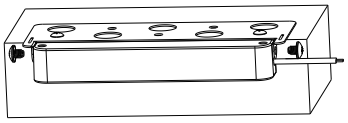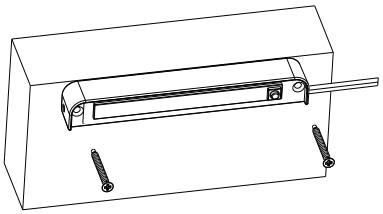
1. Turn off supply power.
2. Determine the desired location for each fixture before construction of wall is started where possible. If needed, determine positions and carefully make cuts or pilot holes for direct surface mounting without the bracket.
3. If mounting using the provided bracket, insert mounting bracket between layers of hardscape material. Use adhesive or mortar (not provided) to secure the fixture in place.
4. Route the fixture wire through the wall to the main low voltage supply cable. A “V” shaped notch can be cut into the hardscape material to aide in wire management if desired.
5. Attach fixture to bracket or surface using screws provided.
6. Connect fixture wires to main low voltage supply cable using suitable waterproof connectors.