

Important: Read all instructions prior to installation.


LED Linear High Bay Light




LHBDP4-SW2B-SP230

Wiring Diagram

120–277 VAC Input

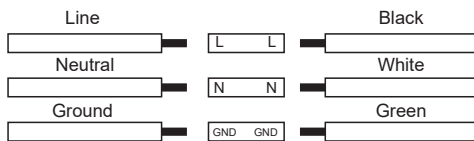

0–10 V Dimming



Safety and Notes

WARNING

- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions. Commercial installation, service, and maintenance of luminaires should be performed by a qualified, licensed electrician. For installation, if you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure during installation.
- Turn off electrical power at fuse or circuit breaker box before wiring fixture to supply power.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information before applying power.
- All wiring connections should be capped with UL/ETL approved wire connectors.

CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Risk of burn. Disconnect power and allow fixture to cool before handling fixture.


NOTICE

- Green ground screw is provided in the proper location. Do not relocate.
- Minimum 90° supply conductors.
- Specifications and dimensions subject to change without notice.
- Suitable for dry or damp location.

CCT and Wattage Selection


Remove the plugs to access CCT and Selectable Wattage switches on top of fixture.

Model	LHBDP4-SW2B-SP155	LHBDP4-SW2B-SP230	LHBDP4-SW2B-SP400
Selectable Wattage	115W, 135W, 155W	185W, 200W, 230W	270W, 340W, 400W
CCT	4000K, 5000K, Selectable CCT		

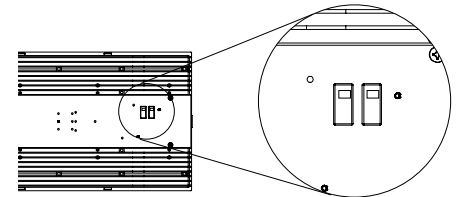

Suspension Installation (included)

1. Switch off the circuit breaker to disconnect supply power before beginning installation.
2. Measure and attach chains to a sturdy pipe or mounting hooks (not included) capable of supporting the fixture's weight.
3. Attach hangers to the chains and suspend the light. Adjust the height as necessary.
4. Attach conduit and thread connections into fixture. Make all wiring connections as indicated in the wiring diagram.
5. Once wiring is complete, switch on the supply power.

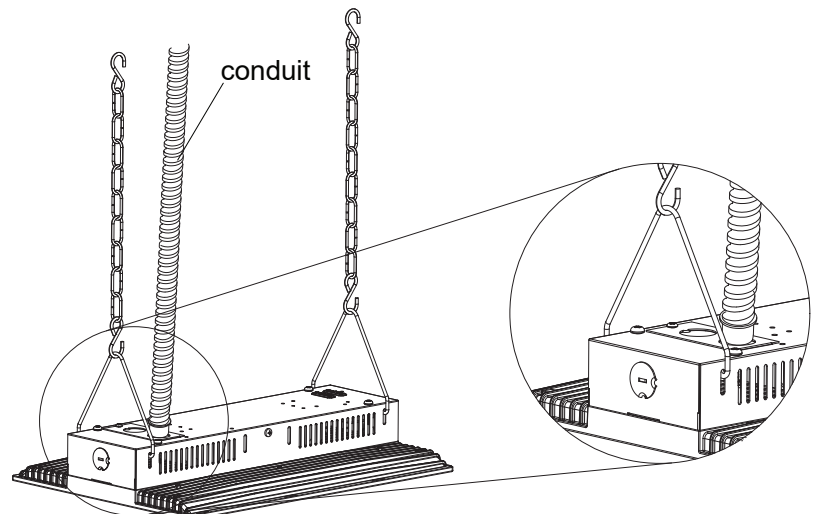

Rev Date: V1.1 05/01/2024


4400 Earth City Expy, St. Louis, MO 63045 • 866-590-3533 • superbrightleds.com

Important: Read all instructions prior to installation.

LED Linear High Bay Light

Surface Mount Installation (LHBDP4-SMK)

1. Switch off the circuit breaker to disconnect supply power before beginning installation.
2. Mark and drill mounting holes on the surface according to the fixture's mounting template.
3. Install the brackets firmly onto the surface using appropriate screws (not included).
4. Attach Fixture to Brackets: Align and secure the fixture to the mounting brackets.
5. Connect the fixture wiring as indicated in the wiring diagram, ensuring a secure connection.
6. Turn on the breaker to restore power and test the fixture.

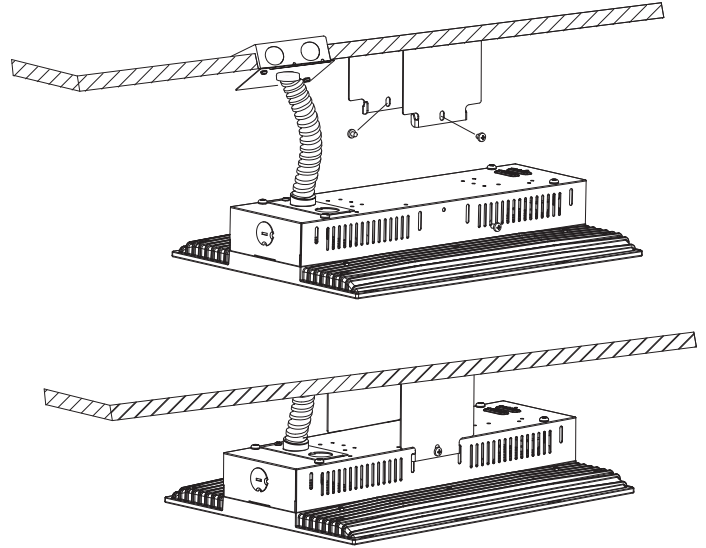

Pendant Installation (LHBDP4-PMK)

1. Switch off the circuit breaker to disconnect supply power before beginning installation.
2. Attach the pendant mounting kit (not included) securely to the ceiling.
3. Insert the fixture into the pendant mount and secure it in place.
4. Connect the fixture wiring as indicated in the wiring diagram, ensuring a secure connection.
5. Turn on the breaker to restore power and test the fixture.

