



# GREENCREATIVE


Bringing You the Latest in LED Technology



**SURFACE MOUNT CEILING SERIES**

# SURFACE MOUNT DOWNLIGHT PRODUCT FEATURES

## Edge Lighting Technology

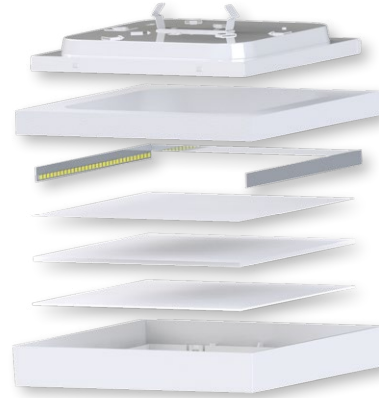


- BACK PLATE
- WATERPROOF FOAM
- EDGE LIGHTING REFLECTOR
- REFLECTOR
- LIGHT GUIDE PLATE
- SootheOptic LOW GLARE
- TRIM

The CLICK DESIGN SURFACE MOUNT SQUARE & ROUND DOWNLIGHTS use the latest in edge lighting technology to produce a smooth uniform lighting effect. These naturally low glare downlights integrate seamlessly into all ceiling applications.

## SootheOptic Low Glare Technology




Glare Control Diffuser



2.4mm Hex Pattern

Viewing Angle

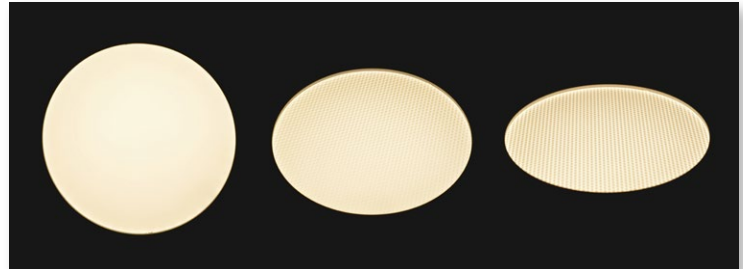

0°

45°


>65°

These downlights all feature SootheOptic technology that reduces high-angle light and minimizes visual glare. The smooth low glare diffuser gives each luminaire a soft cutoff without visible color separation.

## Dual Installation

### 4" J-BOX FLUSHMOUNT

For all models



ACCESSORIES INCLUDED:

- Attach mounting bracket to J-box
- Click downlight into mounting bracket



Mounting Bracket




J-Box Screws



Wire Nuts



LED Adapter



### 4" & 6" CAN RECESSED

4" CAN - 5.5" & 7" models  
6" CAN - 7" model only

ACCESSORIES SOLD SEPARATELY:

- Connect E26 adapter to the LED adapter
- Insert mounting clips and push downlight up until flush with ceiling



E26 Adapter



Mounting Clips



Ground Screw



LED Adapter

# SURFACE MOUNT CEILING SERIES


## 9", 7" & 5.5" SQUARE SURFACE MOUNT DOWNLIGHTS



9" 20W


7" 15W

5.5" 10W

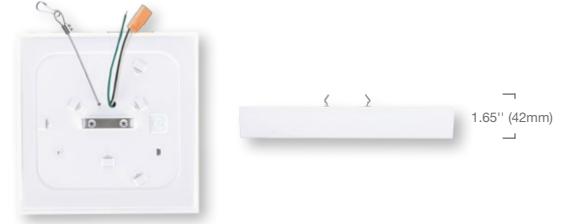

- Dimmable
- 9" 1200lm / 7" 850lm / 5.5" 550lm
- High CRI 90, R9 50 & R13 90
- Low glare
- Wet location rated
- 2700K / 3000K / 4000K CCT
- 50,000-hr lifetime

## 9", 7" & 5.5" ROUND SURFACE MOUNT DOWNLIGHTS

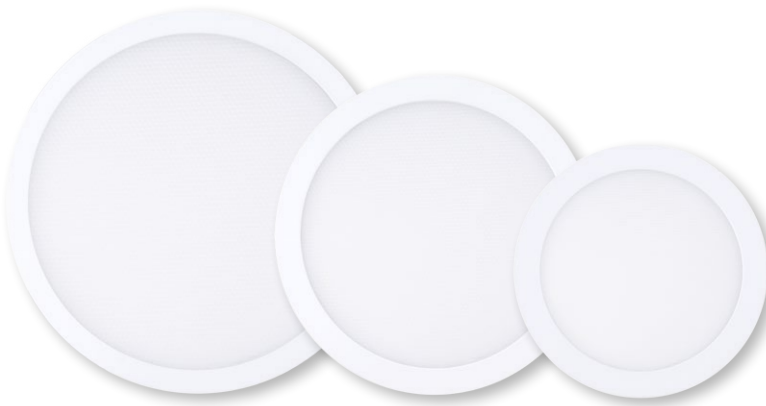

9" 20W

7" 15W

5.5" 10W










- Dimmable
- 9" 1200lm / 7" 850lm / 5.5" 550lm
- High CRI 90, R9 50 & R13 90
- Low glare
- Wet location rated
- 2700K / 3000K / 4000K CCT
- 50,000-hr lifetime

### High CRI & Wet Location Rated





## Specifications

Model	Product	CCT	Power (W)	Lumens (lm)	Equiv.	LPW	Beam Angle	CRI (typ.)	Dim	Life (hrs)	Voltage		
 SMPS 9\" 20W	20SMPS9DIM/930	58242	3000K	20	1200	100W	60	100°	90	Yes	50,000	120V	✓
	20SMPS9DIM/940	58243	4000K	20	1250	100W	63	100°	90	Yes	50,000	120V	✓
 SMPS 7\" 15W	15SMPS7DIM/927	58244	2700K	15	850	75W	57	100°	90	Yes	50,000	120V	✓
	15SMPS7DIM/930	58245	3000K	15	850	75W	57	100°	90	Yes	50,000	120V	✓
	15SMPS7DIM/940	58246	4000K	15	870	75W	58	100°	90	Yes	50,000	120V	✓
 SMPS 5.5\" 10W	10SMPS5.5DIM/927	58247	2700K	10	550	50W	55	100°	90	Yes	50,000	120V	✓
	10SMPS5.5DIM/930	58248	3000K	10	550	50W	55	100°	90	Yes	50,000	120V	✓
	10SMPS5.5DIM/940	58249	4000K	10	560	50W	56	100°	90	Yes	50,000	120V	✓
 SMPR 9\" 20W	20SMPR9DIM/930	58255	3000K	20	1200	100W	60	100°	90	Yes	50,000	120V	✓
	20SMPR9DIM/940	58256	4000K	20	1250	100W	63	100°	90	Yes	50,000	120V	✓
 SMPR 7\" 15W	15SMPR7DIM/927	58257	2700K	15	850	75W	57	100°	90	Yes	50,000	120V	✓
	15SMPR7DIM/930	58258	3000K	15	850	75W	57	100°	90	Yes	50,000	120V	✓
	15SMPR7DIM/940	58259	4000K	15	870	75W	58	100°	90	Yes	50,000	120V	✓
 SMPR 5.5\" 10W	10SMPR5.5DIM/927	58260	2700K	10	550	50W	55	100°	90	Yes	50,000	120V	✓
	10SMPR5.5DIM/930	58261	3000K	10	550	50W	55	100°	90	Yes	50,000	120V	✓
	10SMPR5.5DIM/940	58262	4000K	10	560	50W	56	100°	90	Yes	50,000	120V	✓




## Accessory Ordering Information

Model	Product	Description
SMP/ACC	58033	4" or 6" Recessed Can Accessories for 5.5" & 7" Round & Square (5.5" for Use in 4" Can Only, 7" for Use in 4" or 6" Can)



**GREEN CREATIVE**  
1200 Bayhill Drive, Suite 220  
San Bruno, CA 94066

Tel / Fax: (866) 774-5433  
info@greencreative.com  
**www.greencreative.com**

 / GREENCREATIVELED  
 / GClightingLED  
 / GREEN CREATIVE