


**Important: Read all instructions prior to installation.**

## Motion Activated Security Light

### Safety and Notes


- Product should be installed and serviced by in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- Intended for use with the enclosed gasket and with a junction box marked for use in wet locations.
- Do not leave light in the TEST mode. The frequent power cycling will reduce the lifetime of the light.
- **WARNING: Risk of fire. Do not aim at a combustible surface within 3.3 ft (1 m).**

### Wiring Diagram

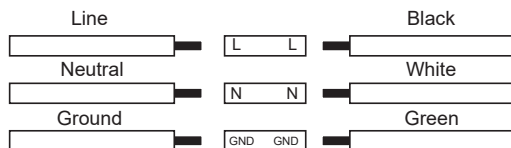

### Installation

1. Remove supply power.
2. Attach mounting bracket to junction box and position gasket on rear of light.
3. Connect wiring.
4. Apply thin coat of silicone to outer edge of housing, to seal light.
5. Remove center cover and attach light to mounting bracket using center screw.
6. Restore power to circuit from electrical panel.
7. Adjust sensor settings and aim light heads to desired position.

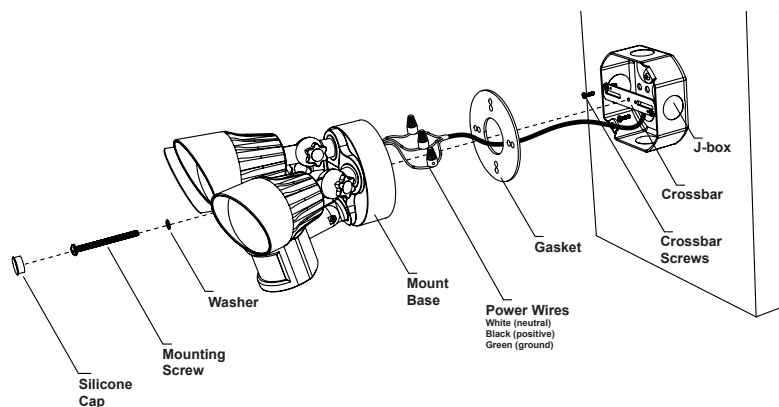


MASL-50K45WH

### Specifications

Model	MASL-50KxWH
Operating Temperature	14°–104° F (-10°–40° C)
IP Rating	IP65

Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

### Sensor Operation and Adjustment

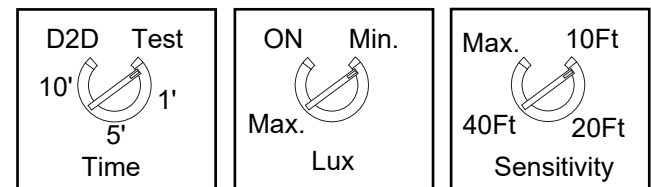

#### Adjustments

- **Sensitivity** adjusts motion detection range from 10 ft to 60 ft.
- **Time** adjusts the duration of time the light stays on after no motion is detected between 1, 5, and 10 minutes.
- **Lux** adjusts the ambient light amount at which the light turns on automatically, from 5–300 lux.

