

Important: Read all instructions prior to installation.

CVPS-xWM-12V

LED Switching Power Supply



Specifications

Model	CVPS-100WM-12V-832
Output Wattage (max)	100W
Output Current	8320 mA
Output Voltage	12 VDC
Input Voltage	100–277 VAC
Environmental Rating	IP68, Suitable for Wet Locations, Waterproof
Ambient Operating Temperature	–40 to 60 °C (–40 to 140 °F)
Dimmable	No

Safety and Notes

- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Ensure all mounts are securely attached and will support the weight of the power supply. Failure to properly support may result in damage or injury, for which the manufacturer does not assume responsibility.
- Installation of overvoltage and surge protection devices in the power supply input circuit is recommended to ensure safety during use.
- Mount to a metal surface in a well-ventilated place to ensure that the ambient temperature is appropriate for operation.
- Do not stack any objects on the power supply. Please do not touch the aluminum housing, as it may become hot during use.
- Suitable for wet locations. Do not expose to corrosive gas or liquids.
- **Ensure the installation of the power supply complies with all driver specifications.**

Installation

1. Before starting installation, ensure power is completely disconnected at the source and cannot be inadvertently reconnected.
 2. Select an appropriate and structurally sound mounting location. Secure the driver to the surface using suitable screws.
 3. Make all connections with suitable wire connectors. For damp or wet installation locations, verify that all connections and housings are tight to prevent water intrusion into the system.
 4. Briefly apply power to test for proper function. Once proper operation is confirmed, disconnect the power and complete the installation.
 5. If any event occurs, such as tripping a breaker or irregular operation, disconnect the input power and output connections.
- A qualified technician should examine all faults. Please do not attempt to remove the power supply case yourself. For additional support, please see our contact information below.




Important: Read all instructions prior to installation.

LED Switching Power Supply

Wiring Diagram

CVPS-100WM-12V-832

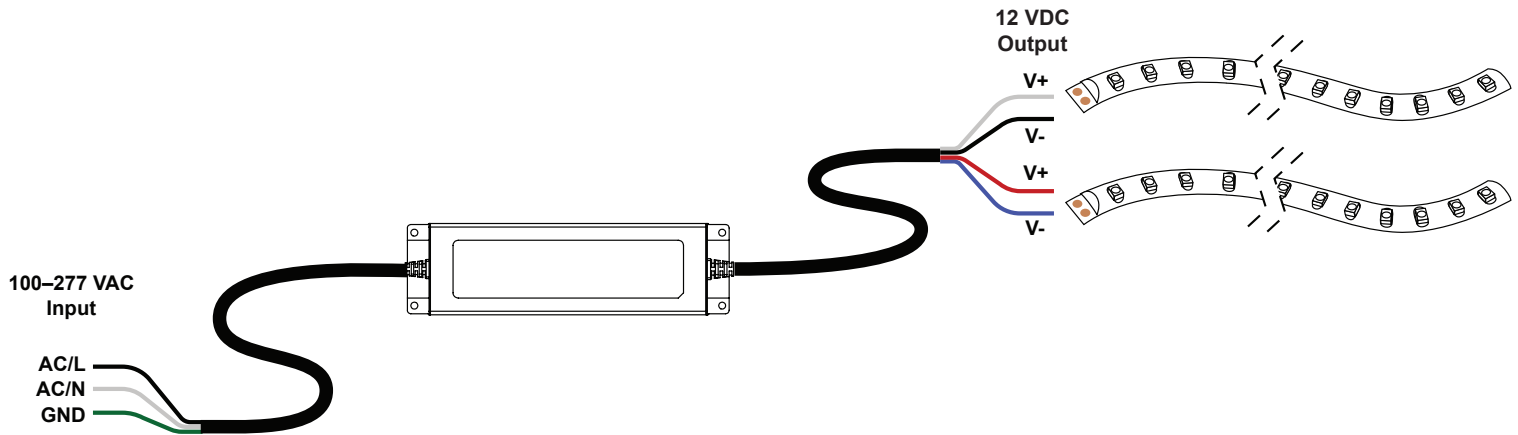

Rev Date: V2 02/17/2025

4400 Earth City Expy, St. Louis, MO 63045 • 866.201.2238 • diodedrive.com