superbrightleds.com

User Manual

Important: Read all instructions prior to installation.

RLF6DS-A1-SW3B12-JB

Selectable CCT 97+ CRI Recessed LED Light Fixture

Safety and Notes

- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures. Do not use if wiring or light are damaged.
- Avoid looking directly into lamp when illuminated.
- Connect only to indicated voltage in an appropriate environment to avoid potential damage or injury.
- Do not install luminaire near any heat source. Failure to properly install fixture may result in damage or injury for which the manufacturer assumes no responsibility.
- Always ensure that power is off and the luminaire has cooled before performing any maintenance, cleaning, or adjustments.

Specifications

Environmental Specifications	
Operating Temperature	-4°–104 F (-20°–40° C)
Environmental Rating	Suitable for damp locations
IC Rated	Yes

Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

Installation

Note: Turn supply power to circuit off before installation.

1. Use a 6-3/8” hole saw to cut a hole in the ceiling at your desired location.
2. Press the latch and remove the back cover of the attached junction box.
3. Use a flathead screwdriver to remove the knockout from the j-box.
4. Use switch inside j-box to select desired CCT.
5. Insert the electrical supply cable through the knockout and secure with a cable clamp connector (sold separately).
6. Make all wiring connections, place all wiring and connections into j-box, and replace cover.
7. Push clips on fixture upwards and insert fixture base into mounting hole. Release clips and fixture will be pulled flush to ceiling.
8. Note: Back of fixture and junction box must not be exposed to damp locations.Use a silicone sealant for damp locations.
9. Reconnect supply power and turn fixture on to confirm it is functioning properly.

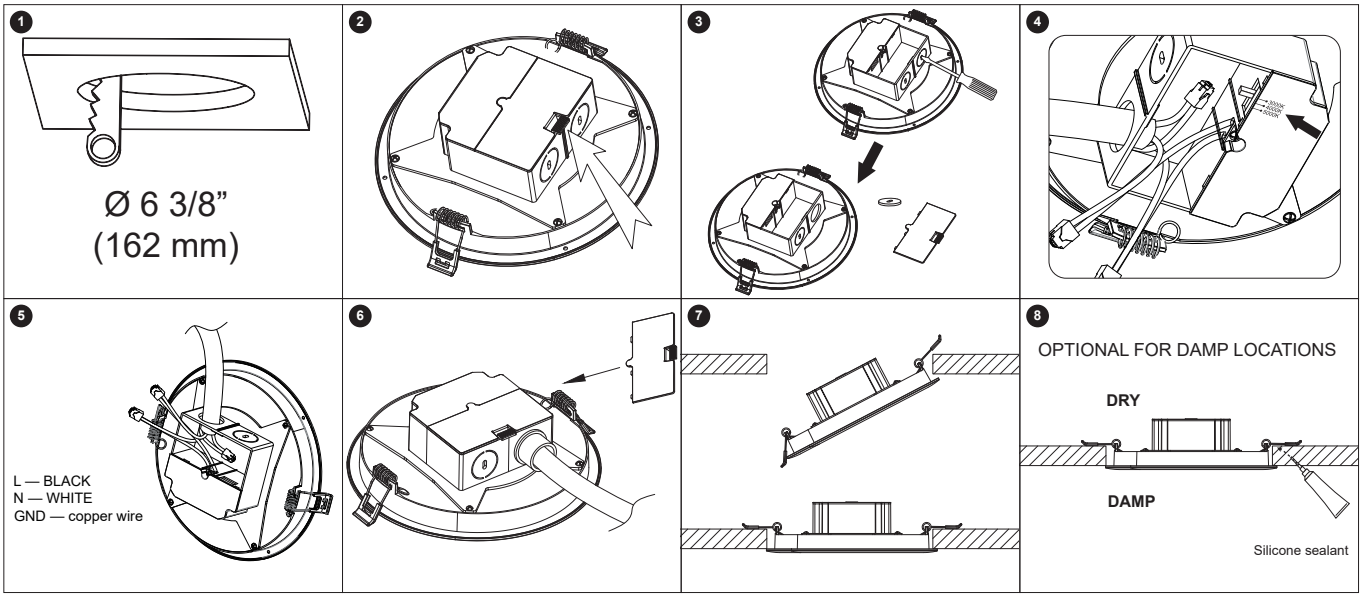

Rev Date: V1 02/10/2024
4400 Earth City Expy, St. Louis, MO 63045 • 866-590-3533 • superbrightleds.com