

**Important:** Read all instructions prior to installation.

## Vapor Tight Linear LED Light

### Safety and Notes

- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.





### Specifications

VTS2D-SW	
IP Rating	IP65
Operating Temperature	-22°–113° F (-30°–45° C)


Check product label for specific electrical specifications related to installation.  
Improper installation will void warranty.

### Wiring Diagram

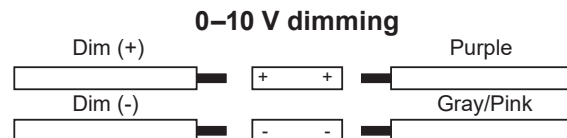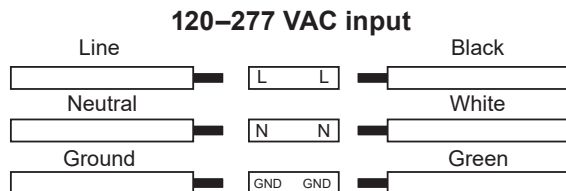

### CCT Selection

To select CCT, open the linear light by releasing the metal clips. This can be done prior to or during installation.

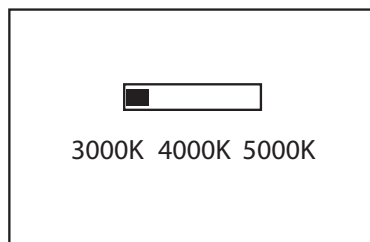

*Important: Read all instructions prior to installation.*

## Vapor Tight Linear LED Light

### Installation

1. Measure and mount the provided mounting brackets.
2. Open housing by unlatching lens and setting it aside.
3. Connect wiring.  
Note: If running in series, make certain to use the other watertight connector to run wiring out of opposite end of fixture.
4. Reassemble fixture and press light into mounting brackets.

