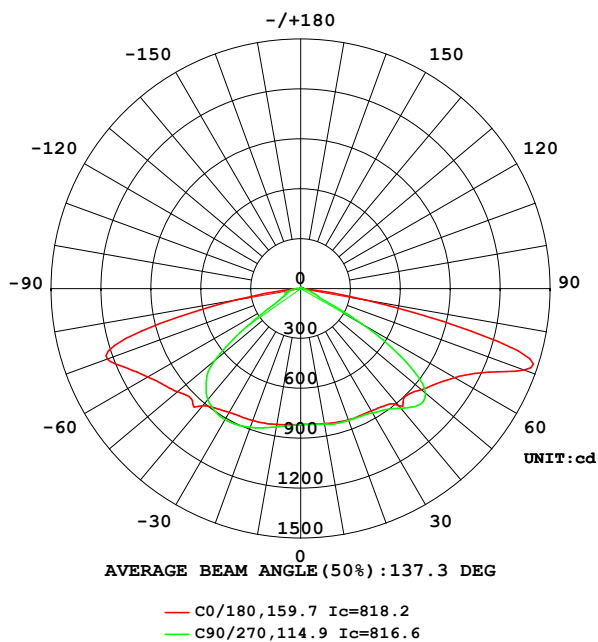
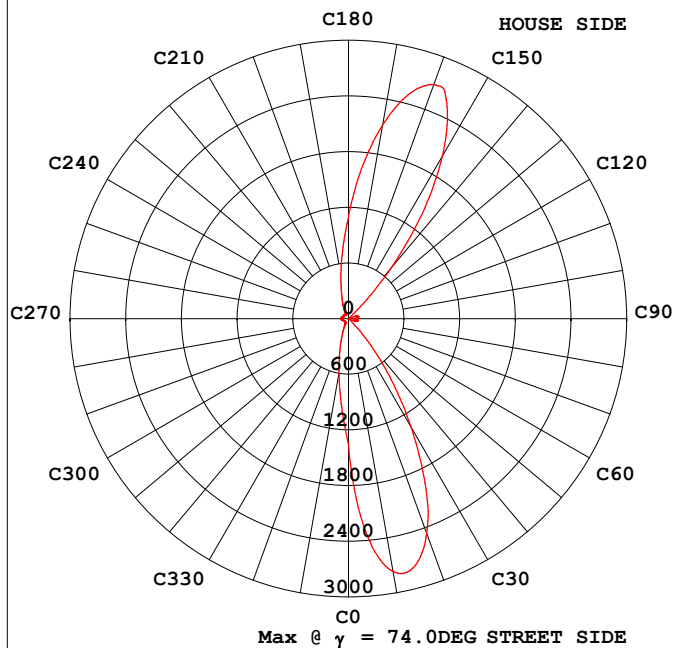


## STREETLIGHT PHOTOMETRIC TEST REPORT

|                                                                                     |                 |                  |
|-------------------------------------------------------------------------------------|-----------------|------------------|
| Test:U:119.64V I:0.2043A P:24.044W PF:0.9837 Freq:59.98Hz<br>Lamp Flux:3855.33x1 lm |                 |                  |
| NAME: 24W 4K G6                                                                     | TYPE:           | WEIGHT:          |
| SPEC.:                                                                              | DIM.:           | SERIAL No.:      |
| MFR.:                                                                               | SUR.: 0.13*0.31 | Shielding Angle: |

| DATA OF LAMP      |         | PHOTOMETRIC DATA Eff: 160.35 lm/W |          |                   |      |
|-------------------|---------|-----------------------------------|----------|-------------------|------|
| MODEL             |         | I <sub>max</sub> (cd)             | 2685     | η street_up (%)   | 0.4  |
| NOMINAL POWER (W) |         | LOR (%)                           | 100.0    | η street_down (%) | 53.1 |
| RATED VOLTAGE (V) |         | TOTAL FLUX (lm)                   | 3855     | η house_up (%)    | 0.4  |
| NOMINAL FLUX (lm) | 3855.33 | MAXIMUM @ (C, γ )                 | 158,74.0 | η house_down (%)  | 46.1 |
| LAMPS INSIDE      | 1       | η up (%)                          | 0.8      | 76 FLASHAREA (m2) |      |
| TEST VOLTAGE (V)  |         | η down (%)                        | 99.2     | SLI               |      |


INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANSMAX INTENSITY CONE SURFACE  
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2024-06-17

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:7.100m [K=1.0000]  
Remarks:

## STREETLIGHT ISOCANDELA DIAGRAM

|                                                                                     |                 |                  |
|-------------------------------------------------------------------------------------|-----------------|------------------|
| Test:U:119.64V I:0.2043A P:24.044W PF:0.9837 Freq:59.98Hz<br>Lamp Flux:3855.33x1 lm |                 |                  |
| NAME: 24W 4K G6                                                                     | TYPE:           | WEIGHT:          |
| SPEC.:                                                                              | DIM.:           | SERIAL No.:      |
| MFR.:                                                                               | SUR.: 0.13*0.31 | Shielding Angle: |

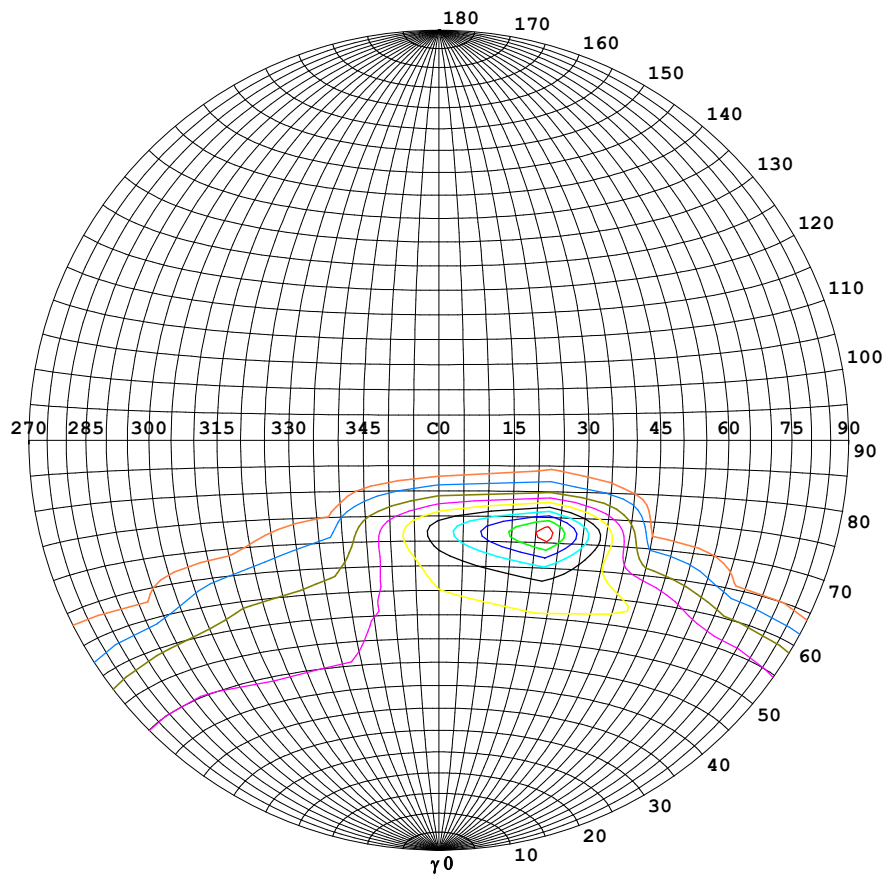

## Classification:


IES:Type IV - Medium  
CIE:Broad - Long  
IES:None cut-off  
CIE:Non-cut-off  
Max.At80:320.8cd/klm  
Max.At90:4.680cd/klm  
Max.80-90:320.8cd/klm

| ISOCANDELA DIAGRAM |      |
|--------------------|------|
| UNIT               | cd   |
| Imax=100%          | 2685 |
| 90%                | 2416 |
| 80%                | 2148 |
| 70%                | 1879 |
| 60%                | 1611 |
| 50%                | 1342 |
| 40%                | 1074 |
| 30%                | 805  |
| 20%                | 537  |
| 10%                | 268  |
| 5%                 | 134  |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2024-06-17

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:7.100m [K=1.0000]  
Remarks:

### COEFFICIENT OF UTILIZATION CURVE AND ISOLUX DIAGRAM

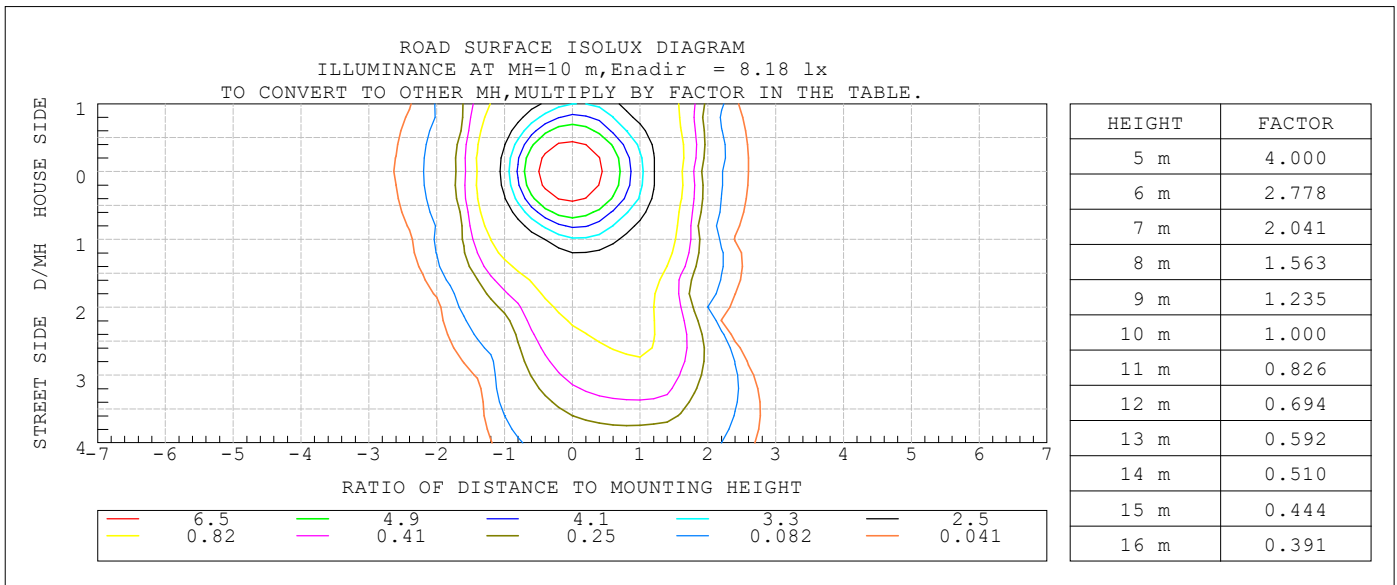

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators:  
Test Date: 2024-06-17

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 7.100m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

|                                                                                     |                 |                  |
|-------------------------------------------------------------------------------------|-----------------|------------------|
| Test:U:119.64V I:0.2043A P:24.044W PF:0.9837 Freq:59.98Hz<br>Lamp Flux:3855.33x1 lm |                 |                  |
| NAME: 24W 4K G6                                                                     | TYPE:           | WEIGHT:          |
| SPEC.:                                                                              | DIM.:           | SERIAL No.:      |
| MFR.:                                                                               | SUR.: 0.13*0.31 | Shielding Angle: |


| $\gamma$ | C0                    | C45    | C90    | C135  | C180  | C225  | C270  | C315  | $\gamma$ | $\Phi$ zone | $\Phi$ total |       |
|----------|-----------------------|--------|--------|-------|-------|-------|-------|-------|----------|-------------|--------------|-------|
| 10       | 825.1                 | 826.7  | 827.9  | 825.8 | 829.6 | 838.4 | 844.3 | 834.8 | 0- 10    | 78.71       | 78.71        | 78.71 |
| 20       | 840.6                 | 850.6  | 843.8  | 849.8 | 845.1 | 871.9 | 886.6 | 866.0 | 10- 20   | 239.8       | 318.5        | 318.5 |
| 30       | 849.5                 | 870.1  | 864.9  | 868.6 | 859.6 | 889.8 | 908.8 | 878.9 | 20- 30   | 400.9       | 719.4        | 719.4 |
| 40       | 920.2                 | 904.6  | 940.5  | 894.5 | 918.9 | 861.2 | 870.5 | 841.1 | 30- 40   | 554.5       | 1274         | 1274  |
| 50       | 945.8                 | 960.8  | 979.1  | 939.3 | 965.4 | 753.8 | 676.0 | 729.2 | 40- 50   | 689.5       | 1963         | 1963  |
| 60       | 1071                  | 1052   | 432.7  | 1098  | 1063  | 488.7 | 168.2 | 490.9 | 50- 60   | 718.7       | 2682         | 2682  |
| 70       | 1431                  | 252.8  | 80.07  | 404.2 | 1238  | 97.27 | 87.74 | 99.69 | 60- 70   | 608.1       | 3290         | 3290  |
| 80       | 400.6                 | 32.44  | 26.04  | 34.32 | 385.5 | 41.63 | 62.38 | 35.33 | 70- 80   | 463.5       | 3754         | 3754  |
| 90       | 3.716                 | 0.8734 | 0.8013 | 1.055 | 5.354 | 8.939 | 18.04 | 6.472 | 80- 90   | 71.07       | 3825         | 3825  |
| 100      | 4.966                 | 1.650  | 1.337  | 1.774 | 4.821 | 3.912 | 1.540 | 3.876 | 90-100   | 3.197       | 3828         | 3828  |
| 110      | 5.992                 | 2.751  | 2.342  | 2.839 | 5.722 | 5.301 | 2.938 | 5.289 | 100-110  | 3.687       | 3832         | 3832  |
| 120      | 7.050                 | 3.941  | 3.512  | 3.981 | 6.723 | 6.154 | 4.284 | 6.215 | 110-120  | 4.568       | 3836         | 3836  |
| 130      | 7.387                 | 4.975  | 4.558  | 4.911 | 7.243 | 6.125 | 5.269 | 7.004 | 120-130  | 4.957       | 3841         | 3841  |
| 140      | 7.020                 | 5.720  | 5.344  | 5.496 | 7.026 | 6.122 | 5.974 | 6.886 | 130-140  | 4.665       | 3846         | 3846  |
| 150      | 6.679                 | 6.061  | 5.785  | 6.037 | 6.625 | 6.575 | 6.206 | 6.694 | 140-150  | 3.920       | 3850         | 3850  |
| 160      | 6.646                 | 6.438  | 6.421  | 6.474 | 6.650 | 6.707 | 6.739 | 6.743 | 150-160  | 2.990       | 3853         | 3853  |
| 170      | 6.846                 | 6.858  | 6.922  | 6.882 | 6.899 | 6.907 | 6.943 | 6.915 | 160-170  | 1.906       | 3855         | 3855  |
| 180      | 7.131                 | 7.179  | 7.219  | 7.123 | 7.135 | 7.179 | 7.223 | 7.159 | 170-180  | 0.6680      | 3855         | 3855  |
| DEG      | LUMINOUS INTENSITY:cd |        |        |       |       |       |       |       |          | UNIT:lm     |              |       |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2024-06-17

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:7.100m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM


|                                                                                     |                 |                  |
|-------------------------------------------------------------------------------------|-----------------|------------------|
| Test:U:119.64V I:0.2043A P:24.044W PF:0.9837 Freq:59.98Hz<br>Lamp Flux:3855.33x1 lm |                 |                  |
| NAME: 24W 4K G6                                                                     | TYPE:           | WEIGHT:          |
| SPEC.:                                                                              | DIM.:           | SERIAL No.:      |
| MFR.:                                                                               | SUR.: 0.13*0.31 | Shielding Angle: |

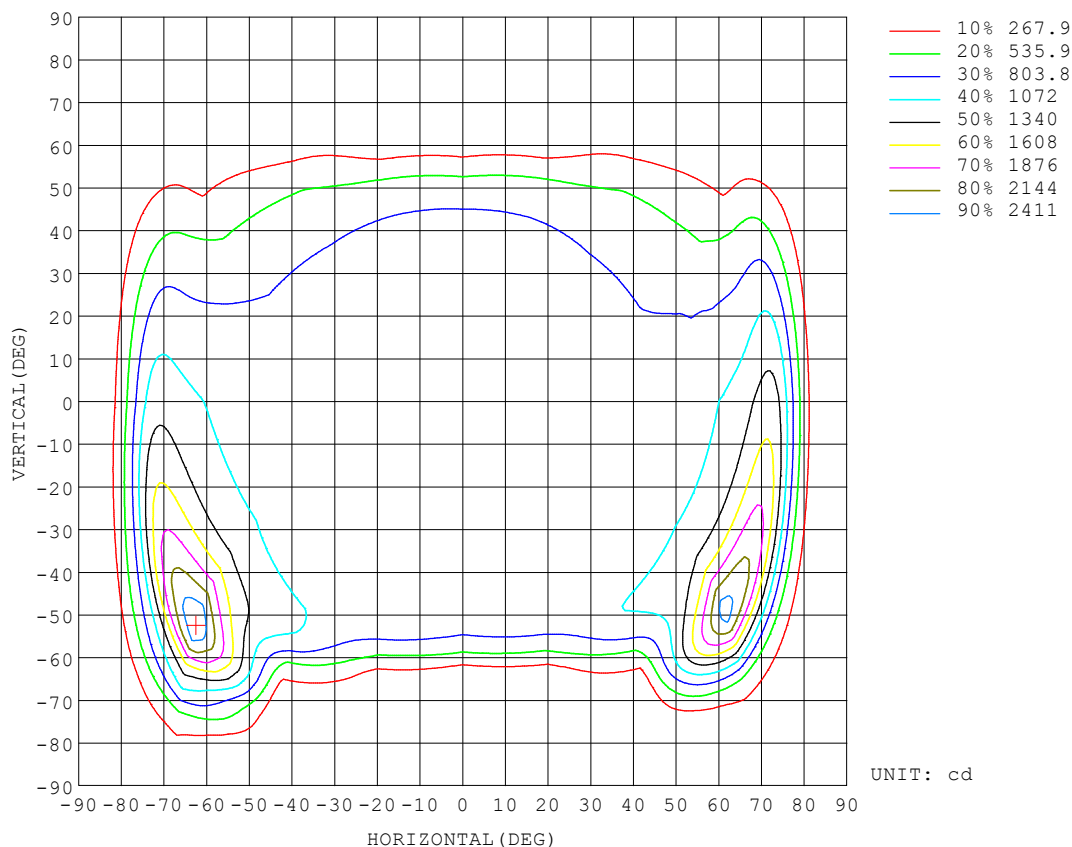

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2024-06-17

γ Range: 0 - 180DEG  
γInterval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:7.100m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

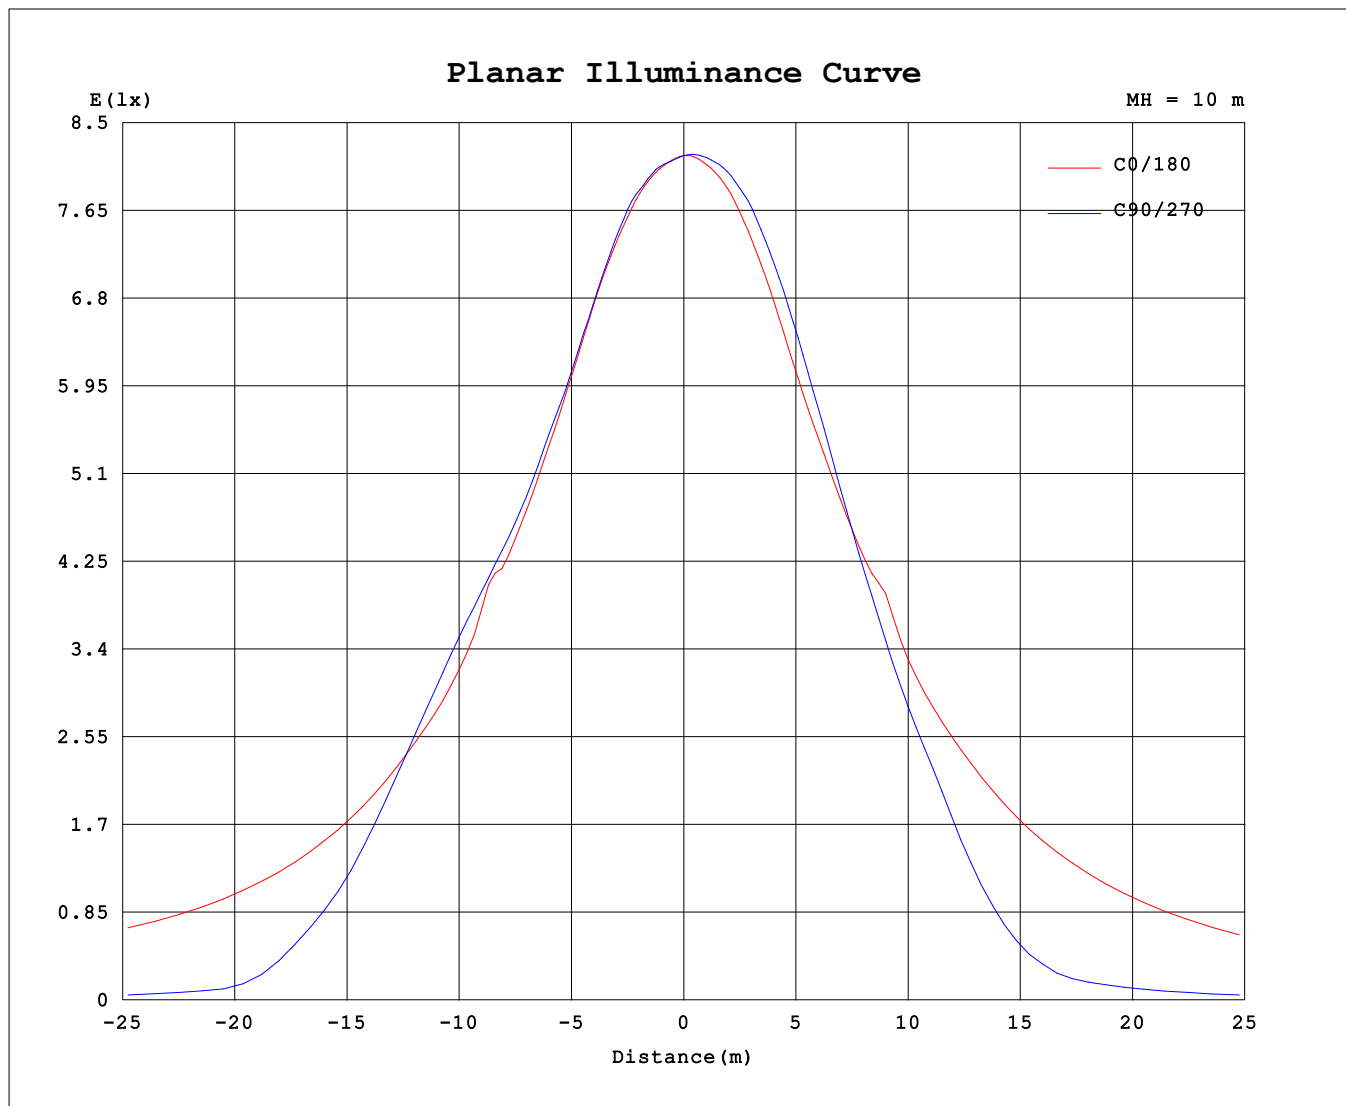


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators:  
Test Date: 2024-06-17

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 7.100m [K=1.0000]  
Remarks:

## LCS REPORT

|                                                                                     |                 |                  |
|-------------------------------------------------------------------------------------|-----------------|------------------|
| Test:U:119.64V I:0.2043A P:24.044W PF:0.9837 Freq:59.98Hz<br>Lamp Flux:3855.33x1 lm |                 |                  |
| NAME: 24W 4K G6                                                                     | TYPE:           | WEIGHT:          |
| SPEC.:                                                                              | DIM.:           | SERIAL No.:      |
| MFR.:                                                                               | SUR.: 0.13*0.31 | Shielding Angle: |

## LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

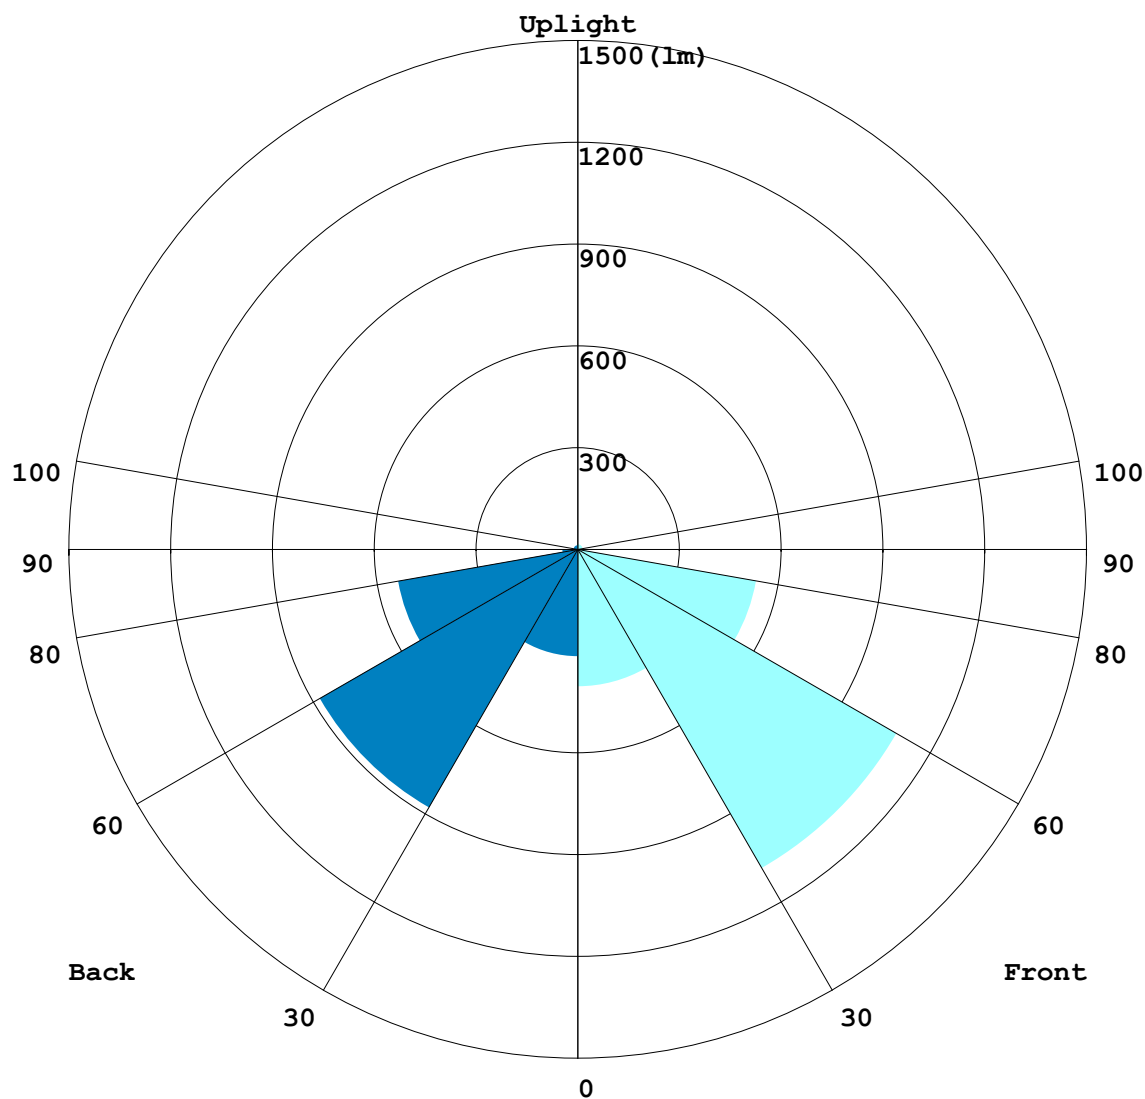

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2024-06-17

γ Range: 0 - 180DEG  
γInterval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:7.100m [K=1.0000]  
Remarks:

## BUG REPORT

|                                                                                     |                 |                  |
|-------------------------------------------------------------------------------------|-----------------|------------------|
| Test:U:119.64V I:0.2043A P:24.044W PF:0.9837 Freq:59.98Hz<br>Lamp Flux:3855.33x1 lm |                 |                  |
| NAME: 24W 4K G6                                                                     | TYPE:           | WEIGHT:          |
| SPEC.:                                                                              | DIM.:           | SERIAL No.:      |
| MFR.:                                                                               | SUR.: 0.13*0.31 | Shielding Angle: |

## IESNA Luminaire Flux Distribution Table:

| Zone                         | Lumens | Luminaire % |
|------------------------------|--------|-------------|
| FL - Front-Low(0-30)         | 404.22 | 10.5        |
| FM - Front-Medium(30-60)     | 1084.8 | 28.1        |
| FH - Front-High(60-80)       | 533.68 | 13.8        |
| FVH - Front-Very High(80-90) | 26.137 | 0.7         |
| Total Forward Light          | 2065.8 | 53.6        |

|                             |        |      |
|-----------------------------|--------|------|
| BL - Back-Low(0-30)         | 315.13 | 8.2  |
| BM - Back-Medium(30-60)     | 877.94 | 22.8 |
| BH - Back-High(60-80)       | 537.93 | 14.0 |
| BVH - Back-Very High(80-90) | 44.936 | 1.2  |
| Total Back Light            | 1789.6 | 46.4 |

|                            |        |     |
|----------------------------|--------|-----|
| UL - Uplight-Low(90-100)   | 3.1969 | 0.1 |
| UH - Uplight-High(100-180) | 27.362 | 0.7 |
| Total Up Light             | 30.559 | 0.8 |

|                           |          |
|---------------------------|----------|
| BUG(Back,Up,Glare) Rating | B2-U2-G2 |
|---------------------------|----------|

| Zone        | Downward<br>Lumens | Upward<br>Lumens | Total<br>Lumens |
|-------------|--------------------|------------------|-----------------|
| House Side  | 1775.9             | 13.652           | 1789.6          |
| Street Side | 2048.9             | 16.906           | 2065.8          |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2024-06-17


γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:7.100m [K=1.0000]  
Remarks:



ROAD ISOCANDELA REPORT

|                                                                                     |                 |                  |
|-------------------------------------------------------------------------------------|-----------------|------------------|
| Test:U:119.64V I:0.2043A P:24.044W PF:0.9837 Freq:59.98Hz<br>Lamp Flux:3855.33x1 lm |                 |                  |
| NAME: 24W 4K G6                                                                     | TYPE:           | WEIGHT:          |
| SPEC.:                                                                              | DIM.:           | SERIAL No.:      |
| MFR.:                                                                               | SUR.: 0.13*0.31 | Shielding Angle: |

ROAD SURFACE ISOCANDELA DIAGRAM

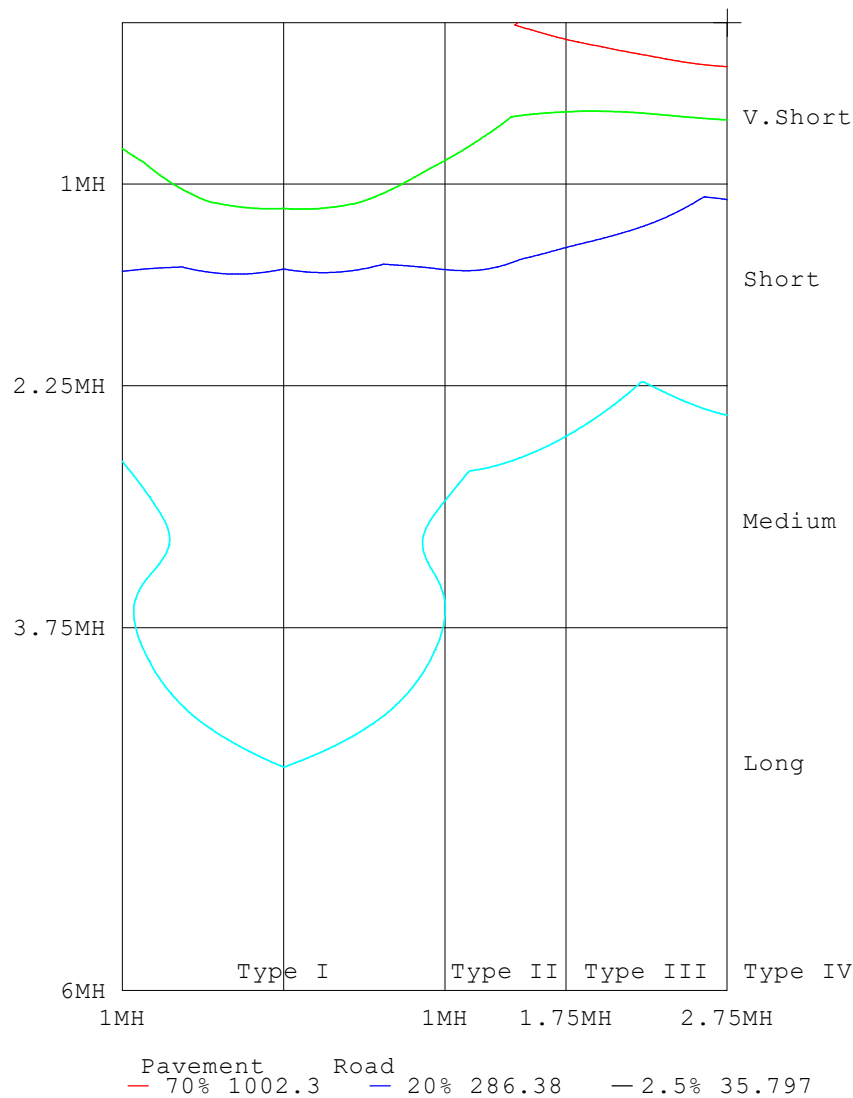

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2024-06-17

Y Range: 0 - 180DEG  
Y Interval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:7.100m [K=1.0000]  
Remarks:

50% 715 94 5% 71 594

## LUMINOUS DISTRIBUTION INTENSITY DATA

|                                                                                     |  |  |  |  |  |  |  |  |                 |  |  |  |  |  |                  |  |  |
|-------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|-----------------|--|--|--|--|--|------------------|--|--|
| Test:U:119.64V I:0.2043A P:24.044W PF:0.9837 Freq:59.98Hz<br>Lamp Flux:3855.33x1 lm |  |  |  |  |  |  |  |  |                 |  |  |  |  |  |                  |  |  |
| NAME: 24W 4K G6                                                                     |  |  |  |  |  |  |  |  | TYPE:           |  |  |  |  |  | WEIGHT:          |  |  |
| SPEC.:                                                                              |  |  |  |  |  |  |  |  | DIM.:           |  |  |  |  |  | SERIAL No.:      |  |  |
| MFR.:                                                                               |  |  |  |  |  |  |  |  | SUR.: 0.13*0.31 |  |  |  |  |  | Shielding Angle: |  |  |

Table--1

UNIT: cd

| C (DEG)<br>γ (DEG) |      | 0    | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  | 202.5 | 225  | 247.5 | 270  | 292.5 | 315  | 337.5 |  |  |  |
|--------------------|------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|--|--|
| 0                  | 818  | 818  | 818  | 818  | 818  | 818  | 818   | 818  | 818   | 818  | 818   | 818  | 818   | 818  | 818   | 818  | 818   |  |  |  |
| 5                  | 818  | 817  | 817  | 818  | 819  | 818  | 818   | 818  | 821   | 824  | 826   | 827  | 827   | 825  | 823   | 820  |       |  |  |  |
| 10                 | 825  | 824  | 827  | 827  | 828  | 826  | 826   | 825  | 830   | 835  | 838   | 843  | 844   | 841  | 835   | 828  |       |  |  |  |
| 15                 | 832  | 834  | 838  | 840  | 839  | 840  | 836   | 833  | 838   | 846  | 856   | 864  | 867   | 861  | 850   | 839  |       |  |  |  |
| 20                 | 841  | 843  | 851  | 845  | 844  | 850  | 850   | 844  | 845   | 857  | 872   | 884  | 887   | 880  | 866   | 850  |       |  |  |  |
| 25                 | 844  | 848  | 856  | 849  | 849  | 862  | 859   | 854  | 850   | 865  | 885   | 900  | 904   | 895  | 878   | 858  |       |  |  |  |
| 30                 | 849  | 848  | 870  | 864  | 865  | 873  | 869   | 858  | 860   | 874  | 890   | 907  | 909   | 900  | 879   | 859  |       |  |  |  |
| 35                 | 864  | 861  | 894  | 900  | 889  | 901  | 887   | 868  | 881   | 876  | 885   | 900  | 900   | 891  | 869   | 853  |       |  |  |  |
| 40                 | 920  | 910  | 905  | 943  | 941  | 934  | 894   | 923  | 919   | 867  | 861   | 871  | 870   | 864  | 841   | 838  |       |  |  |  |
| 45                 | 906  | 948  | 921  | 1000 | 995  | 981  | 906   | 985  | 933   | 847  | 820   | 816  | 804   | 808  | 796   | 811  |       |  |  |  |
| 50                 | 946  | 976  | 961  | 1034 | 979  | 1027 | 939   | 1001 | 965   | 809  | 754   | 728  | 676   | 722  | 729   | 772  |       |  |  |  |
| 55                 | 997  | 1055 | 1039 | 910  | 784  | 963  | 1010  | 1093 | 1008  | 746  | 653   | 487  | 389   | 501  | 634   | 702  |       |  |  |  |
| 60                 | 1071 | 1205 | 1052 | 564  | 433  | 639  | 1098  | 1250 | 1063  | 649  | 489   | 203  | 168   | 215  | 491   | 610  |       |  |  |  |
| 65                 | 1197 | 1589 | 693  | 152  | 123  | 226  | 965   | 1619 | 1142  | 500  | 255   | 115  | 119   | 113  | 276   | 489  |       |  |  |  |
| 70                 | 1431 | 2393 | 253  | 77.4 | 80.1 | 84.8 | 404   | 2284 | 1238  | 306  | 97.3  | 78.1 | 87.7  | 74.3 | 99.7  | 302  |       |  |  |  |
| 75                 | 1228 | 1976 | 61.2 | 52.8 | 49.2 | 56.2 | 104   | 2510 | 992   | 132  | 58.3  | 59.0 | 100.0 | 55.6 | 55.3  | 138  |       |  |  |  |
| 80                 | 401  | 503  | 32.4 | 24.0 | 26.0 | 27.1 | 34.3  | 1237 | 386   | 41.9 | 41.6  | 44.8 | 62.4  | 41.4 | 35.3  | 39.2 |       |  |  |  |
| 85                 | 35.3 | 108  | 10.1 | 7.60 | 8.07 | 8.70 | 12.7  | 292  | 68.5  | 22.7 | 22.6  | 48.5 | 38.5  | 36.9 | 18.9  | 20.3 |       |  |  |  |
| 90                 | 3.72 | 1.80 | 0.87 | 0.64 | 0.80 | 0.79 | 1.06  | 2.84 | 5.35  | 6.95 | 8.94  | 14.7 | 18.0  | 11.3 | 6.47  | 5.42 |       |  |  |  |
| 95                 | 4.30 | 2.40 | 1.23 | 0.89 | 0.98 | 1.05 | 1.35  | 2.81 | 4.16  | 4.33 | 3.25  | 1.73 | 1.31  | 1.56 | 3.13  | 4.56 |       |  |  |  |
| 100                | 4.97 | 3.00 | 1.65 | 1.28 | 1.34 | 1.44 | 1.77  | 3.37 | 4.82  | 4.95 | 3.91  | 1.98 | 1.54  | 1.95 | 3.88  | 5.12 |       |  |  |  |
| 105                | 5.49 | 3.55 | 2.16 | 1.78 | 1.81 | 1.93 | 2.27  | 3.90 | 5.30  | 5.34 | 4.65  | 2.66 | 2.22  | 2.66 | 4.62  | 5.49 |       |  |  |  |
| 110                | 5.99 | 4.14 | 2.75 | 2.34 | 2.34 | 2.48 | 2.84  | 4.43 | 5.72  | 5.60 | 5.30  | 3.36 | 2.94  | 3.38 | 5.29  | 5.84 |       |  |  |  |
| 115                | 6.53 | 4.71 | 3.36 | 2.95 | 2.93 | 3.08 | 3.43  | 4.96 | 6.21  | 6.01 | 5.79  | 4.04 | 3.65  | 4.07 | 5.78  | 6.37 |       |  |  |  |
| 120                | 7.05 | 5.24 | 3.94 | 3.56 | 3.51 | 3.67 | 3.98  | 5.40 | 6.72  | 6.41 | 6.15  | 4.60 | 4.28  | 4.64 | 6.21  | 6.94 |       |  |  |  |
| 125                | 7.37 | 5.70 | 4.49 | 4.14 | 4.07 | 4.22 | 4.49  | 5.67 | 7.11  | 6.53 | 6.25  | 5.05 | 4.80  | 5.09 | 6.66  | 7.28 |       |  |  |  |
| 130                | 7.39 | 6.05 | 4.97 | 4.64 | 4.56 | 4.70 | 4.91  | 5.75 | 7.24  | 6.47 | 6.13  | 5.44 | 5.27  | 5.52 | 7.00  | 7.31 |       |  |  |  |
| 135                | 7.26 | 6.24 | 5.40 | 5.10 | 5.00 | 5.10 | 5.25  | 5.82 | 7.17  | 6.53 | 6.08  | 5.68 | 5.73  | 5.95 | 7.05  | 7.30 |       |  |  |  |
| 140                | 7.02 | 6.32 | 5.72 | 5.48 | 5.34 | 5.39 | 5.50  | 5.93 | 7.03  | 6.85 | 6.12  | 5.80 | 5.97  | 6.17 | 6.89  | 7.25 |       |  |  |  |
| 145                | 6.79 | 6.35 | 5.91 | 5.72 | 5.59 | 5.62 | 5.74  | 6.07 | 6.77  | 6.90 | 6.37  | 5.90 | 6.05  | 6.22 | 6.71  | 7.10 |       |  |  |  |
| 150                | 6.68 | 6.41 | 6.06 | 5.89 | 5.78 | 5.89 | 6.04  | 6.26 | 6.62  | 6.77 | 6.57  | 6.19 | 6.21  | 6.31 | 6.69  | 6.89 |       |  |  |  |
| 155                | 6.65 | 6.48 | 6.25 | 6.13 | 6.08 | 6.22 | 6.27  | 6.41 | 6.62  | 6.70 | 6.65  | 6.48 | 6.52  | 6.55 | 6.71  | 6.77 |       |  |  |  |
| 160                | 6.65 | 6.59 | 6.44 | 6.43 | 6.42 | 6.50 | 6.47  | 6.57 | 6.65  | 6.69 | 6.71  | 6.64 | 6.74  | 6.73 | 6.74  | 6.76 |       |  |  |  |
| 165                | 6.71 | 6.71 | 6.64 | 6.67 | 6.68 | 6.73 | 6.67  | 6.73 | 6.74  | 6.73 | 6.78  | 6.74 | 6.85  | 6.81 | 6.81  | 6.76 |       |  |  |  |
| 170                | 6.85 | 6.89 | 6.86 | 6.91 | 6.92 | 6.96 | 6.88  | 6.90 | 6.90  | 6.85 | 6.91  | 6.86 | 6.94  | 6.92 | 6.92  | 6.86 |       |  |  |  |
| 175                | 7.01 | 7.05 | 7.03 | 7.12 | 7.13 | 7.13 | 7.03  | 7.02 | 7.06  | 7.02 | 7.06  | 7.01 | 7.06  | 7.02 | 7.03  | 6.97 |       |  |  |  |
| 180                | 7.13 | 7.14 | 7.18 | 7.20 | 7.22 | 7.23 | 7.12  | 7.12 | 7.14  | 7.14 | 7.18  | 7.20 | 7.22  | 7.19 | 7.16  | 7.10 |       |  |  |  |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:  
Test Date:2024-06-17

γ Range: 0 - 180DEG  
γInterval: 1.0DEG  
Test System: GO-2000B\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:7.100m [K=1.0000]  
Remarks: