



SLKM-WW20-60-12V



Available Models¹

Knuckle Mount

☐ SLKM-WW20-60-12V

☐ SLKM-WW30-60-12V

Part Number Breakdown

Example: SLKM-WW20-60-12V

Family	CCT	Wattage	Beam Angle	Voltage
SLKM [Spot Light, Knuckle Mount]	WW [warm white, 3000K]	20 [20 W]	60 [60°]	12V [12V AC/DC]
		30 [30 W]		

Description

The knuckle-mount LED bullet-style spot light delivers a 60° flood light beam angle with a 6x6 NEMA distribution pattern for commercial exterior lighting and signage lighting. The light fixture replaces traditional metal halide fixtures reducing energy and maintenance costs. Bronze finished die-cast aluminum housing and polycarbonate lens withstand outdoor conditions. ½" NPT threaded knuckle for direct junction box mounting.

Mechanical

- Bronze powder-coated aluminum housing
- Non-yellowing polycarbonate lens
- IP65 rated, waterproof

Electrical

- 12V AC/DC input
- 50,000 hour L70 rated lifespan

Photometrics

- NEMA 6x6
- 3000K CCT

Application

Easily replaces inefficient metal-halide fixtures such as those used for lighting building facades and signs as well as those found in general landscape, security, and area lighting applications.

Warranty

Five (5) year warranty

Product Page QR Code



T 866.811.5550

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/cat/industrial-led-lighting/


¹Contact customer service if interested in options other than those listed.

Dimensional Drawings


SLKM-WW20-60-12V

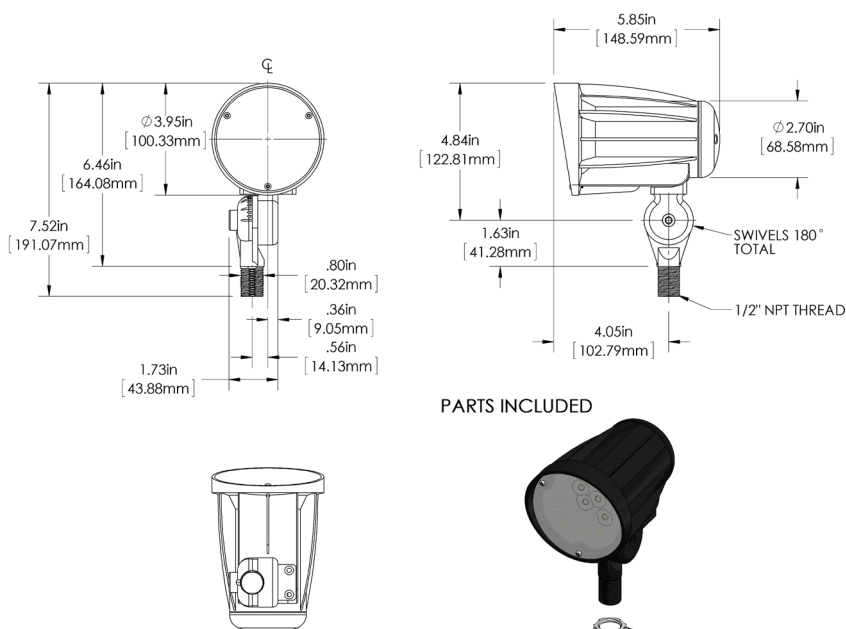


PARTS INCLUDED



SLKM-WW30-60-12V

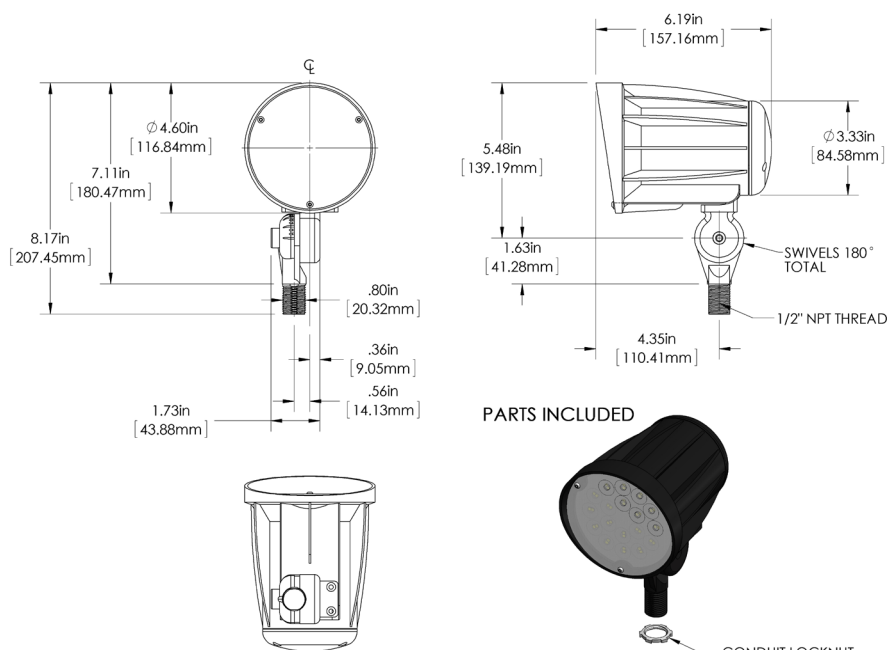

PARTS INCLUDED

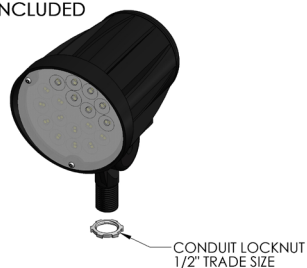

SLKM Series

LED Spot Light Specifications

Specifications

Model	SLKM-WW20-60-12V	SLKM-WW30-60-12V
Lumens	2,300 lm	2,900 lm
Operating Voltage	12V AC/DC	
Power Consumption	20 W	30 W
Current Draw	1.9 A	2.3 A
Color Temperature	3000K	
Beam Angle	60°	
Distribution Pattern	NEMA 6x6	
CRI	80+	
Dimming	N/A	
IP Rating	IP65	
Ambient Operating Temperature	-22°—113° F (-30°—45° C)	
Rated Life (L70)	50,000 hours	
Mount Type	Knuckle Mount	

