

Important: Read all instructions prior to installation.

LED Vehicle Area / Scene Light with Strobe



VAL-WL12-AW

Flash Patterns

Pattern	Pattern Name
1	Single (All)
2	Double (All)
3	Quad (All)
4	Quint (All)
5	Constant Strobe (All)
6	Single + Quad (All)
7	Single + Strobe (All)
8	Slow Single (All)
9	Single + Slow Single (All)
10	Single (Split)
11	Double (Split)
12	Quad (Split)
13	Quint (Split)
14	Strobe (Split)
15	Single + Quad (Split)
16	Single + Strobe (Split)
17	Random
18	Combination
19	Constant Bright


Safety and Notes

- Disconnect power/battery before installing or connecting wiring.
- Avoid looking directly into lamp when illuminated.
- Do not fully submerge in water for extended periods (over 30 minutes) or expose to high pressure jets of water or steam when cleaning.

Specifications

Model	VAL-WL12-AW
Voltage	12–24 VDC
IP Rating	IP67
Operating Temperature	-49°–140° F (-45°–60° C)

Wiring and Operation

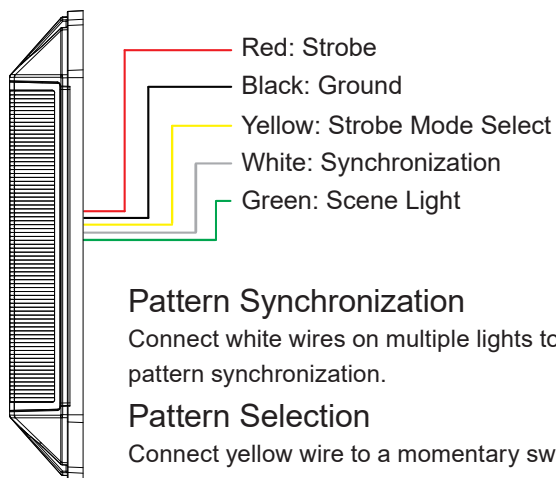

Pattern Synchronization

Connect white wires on multiple lights together for pattern synchronization.

Pattern Selection

Connect yellow wire to a momentary switch connected to 12-24 VDC power (+). When power is applied to the circuit, the pattern will change. Briefly press momentary switch (less than one second) to go to next pattern or hold the switch for five seconds to return to the first pattern.

Installation

1. Disconnect battery.
2. Mark hole locations using the light as a guide.
3. Drill appropriate mounting and wiring holes into surface as needed.
4. Place included gasket on light.
5. Connect wiring and route it through hole making sure to use a strain relief on metal surfaces.
6. Check for proper operation.
7. If light is working as intended, mount light.