PRODUCT DESCRIPTION

The cover has a matt black surface that turns white when the light is turned on. The cover is made of UV-resistant PMMA. When the LEDs are off, it is black. The best visual effect is obtained in profiles that are black inside.

Line of light at 120LED/m (9.6W/m) in profiles with minimal deep 19 mm.

- They blend in with dark lighting fixtures and dark surfaces of ceilings or walls
- A surprising light effect when the light is switched on

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

Application

- decorative lighting

Mounting

- snap-in in dedicated profiles

Material	PMMA
Material	PMMA
Color	black
Available length	39.4", 78.75"
UV resistance	increased
UV-resistant	no

TECHNICAL DRAWING

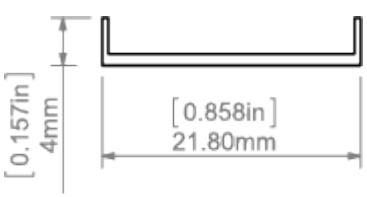

RELATED EXTRUSIONS


DIPOK-US Extrusion Ref: H1233

GIZA Extrusion Ref: B5556ANODA

GIZA-DUO-LL Extrusion Ref: C2162

GIZA-LL Extrusion Ref: C0758

GIZA-LL-T Extrusion Ref: C2479

GIZA-LL-UST Extrusion Ref: C2724


GLAZA-LL Extrusion Ref: C2627


KOZEL Extrusion Ref: B6454

KOZUS Extrusion Ref: B7823NA


KOZUS-CR Extrusion Ref: C0600NA


LARKO Extrusion Ref: B5552ANODA


LESTO Extrusion Ref: B5551ANODA


LIPOD Extrusion Ref: B5554ANODA


LOC-30 Extrusion Ref: 18015ANODA


LOKOM Extrusion Ref: B5553ANODA


OPAC-30 Extrusion Ref: B6164ANODA


STEPUS Extrusion Ref: 18038ANODA


WERKIN Extrusion Ref: 18025ANODA