

PRODUCT DESCRIPTION

TAN-C5 (non-anodized) extrusion is sold with a cover is the economical equivalent of a standard 45-ALU extrusion.

Patent Number: US D705,982 S



Fixture Certified to NSF 2 standards when assembled by KLUS

- Housing for LED strips that are up to 12mm wide (0.48")
- The extrusion directs the light at a 45-degree angle

FINISH:

Non anodized (raw)





Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

Application

- for construction of directional lighting fixtures
- for mounting on surfaces and in internal 90° corners

Mounting

- with a 45-STN mounting bracket, professional double-sided adhesive tapes and mounting adhesives

Additional information

- cover with simplified construction,
- lighting or illumination of certain areas (stream of light may vary depending on the power of applied LEDs),
- all types of grooves, inputs or surface edges,
- indoor and outdoor (extrusion is not waterproof, not to be applied if directly exposed to weather conditions),
- space for LED strip: 0.41" / 10.5 mm,
- not recommended to be used with LEDs exceeding 4.5w/ft.

Turn off LED lights during peak day light hours in outdoor applications to avoid excessive heat buildup which will





result in diminished LED life.

AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
B5391/Frosted Cover_1	Non anodized (raw)	39.4"
B5391/Frosted Cover_2	Non anodized (raw)	78.75"

TECHNICAL DRAWING





TAN-C5 extrusion and 45-STN mounting bracket

RELATED PRODUCTS

COVERS

FROSTED COVERS



T frosted Cover Ref: 17015

END CAPS

REGULAR END CAPS





TAN-C5 grey End Ref: 20052

ACCESSORIES

FASTENERS & MOUNTING ACCESSORIES



45 Mounting bracket white Ref: 24265



45-STN Mounting bracket Ref: 24144



ALU mounting bracket Ref: 1455



Chrome matt 45- 45-ZZ Head conductive Ref: 42212



45-ST Head Ref: 42210



DP-45-MOC Fastener Ref: 00652



DP-45-MOC-ZZ Fastener Ref: 00654

ADDITIONAL ITEMS



6x1.2 Gland Ref: 00802

LED TAPES

HIGH EFFICACY



Ref: K-HE-1920-HD-24V



Ref: K-HE-0960-HD-24V




K-HE-1920-HD-24V K-HE-0960-HD-24V K-HE-1440-HD-24V K-HE-0480-HD-24V Ref: K-HE-1440-HD-24V




Ref: K-HE-0480-HD-24V

CRI95+



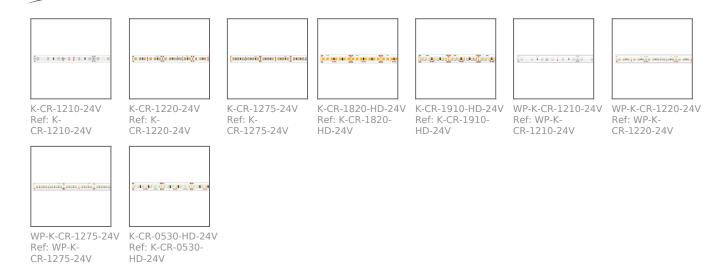

WHITE

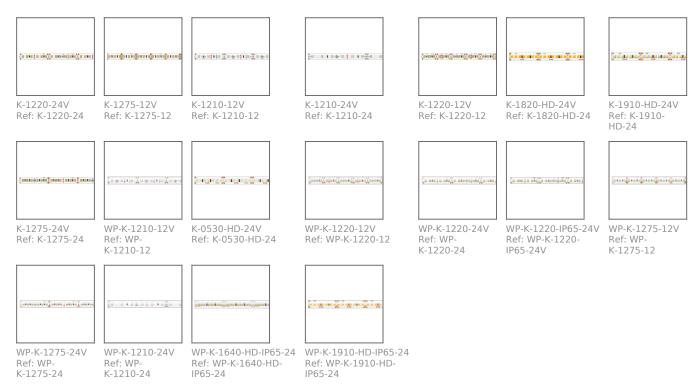

RGB/ RGBW



ADJUSTABLE WHITE/ DIM TO WARM









Ref:

Ref: K-22/50-1728-24V K-30/18-1770-24V K-30/18-1770-010V-24V

K-22/50-1728-24V K-30/18-1770-24V K-30/18-1770-010V-24V Ref:

LONG RUN



K-LR-1000-24V Ref: K-LR-1000-24

WHITE LED STRIP CONNECTORS







C1-0W Ref: C1-0W

C2-1.5W Ref: C2-1.5W

C3-6W Ref: C3-6W