

Light efficiency:

128 Lumen/Watt

Output: 12980 lm

Light quality:

CRI: 84.5


Peak: 6105 cd

Color temperature:

5030 K

Power: 101.3 W

PF: 1.0

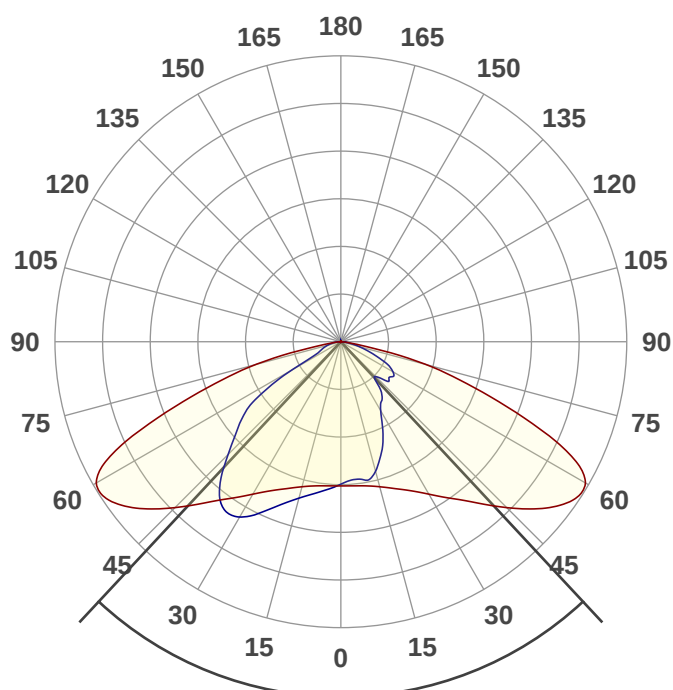

Product name:

ALD-50K10W-C-BRC3 Type II-M

Date and time:

4/5/2019 11:28:04 AM

Beam angle

86°




CIE 1931


x: 0.345

y: 0.357

Spectra

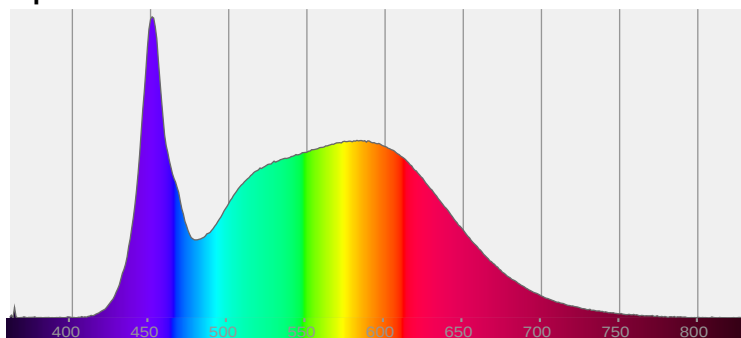

Power

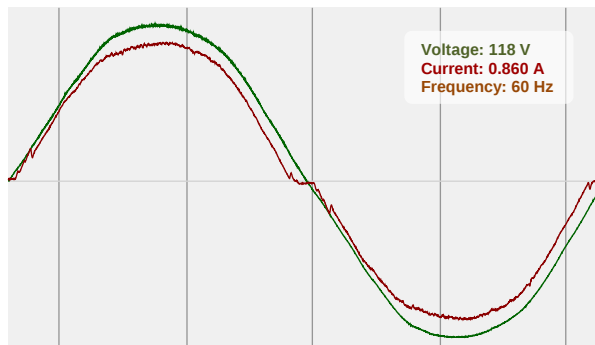



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

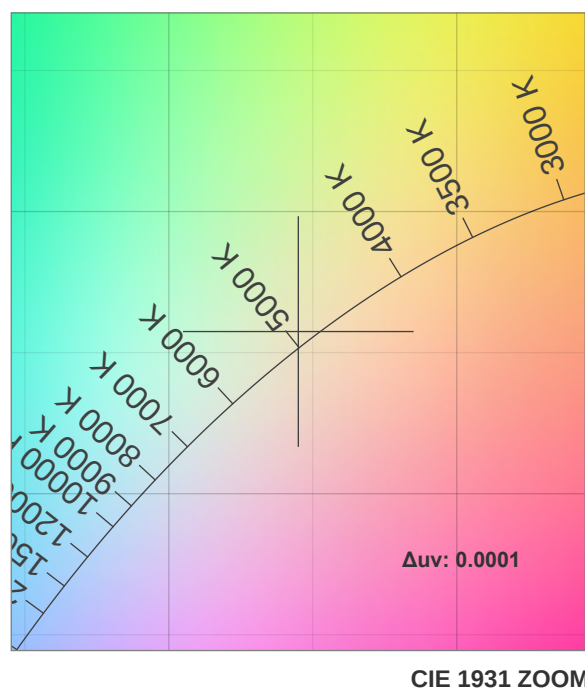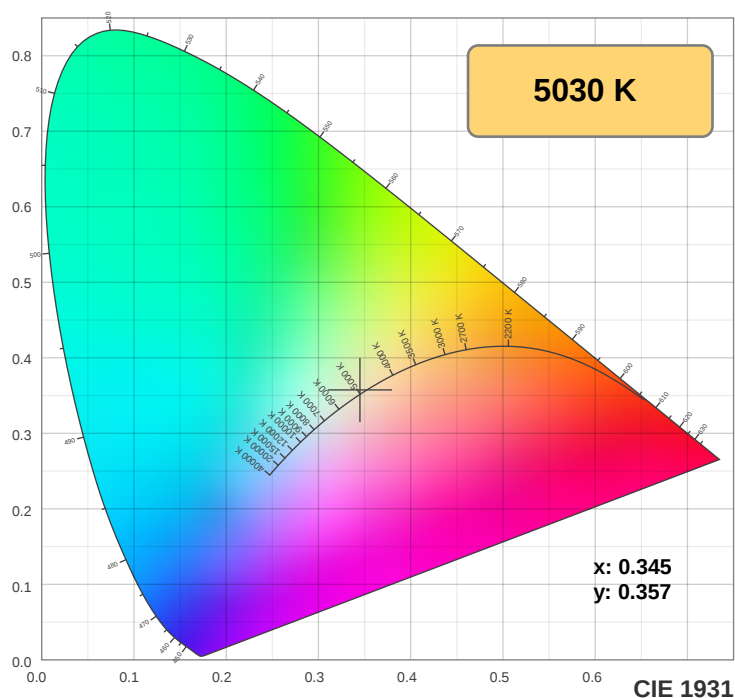

TM30: 82.7

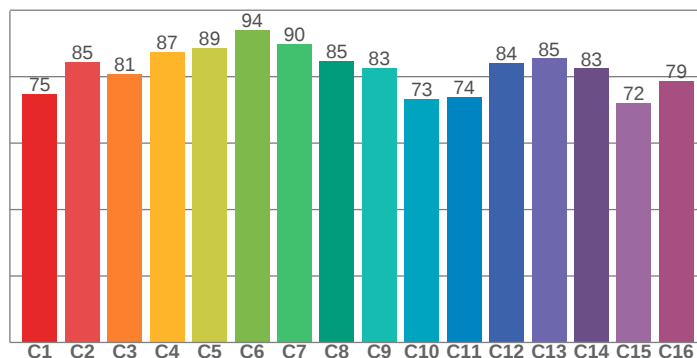

CRI: 84.5 (R1-R8)

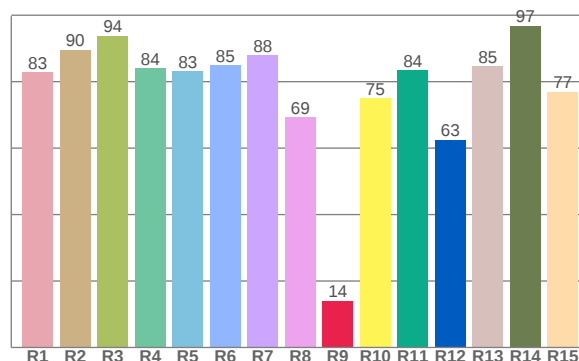

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82.8	89.6	93.9	84.0	83.2	85.0	87.9	69.3	14.1	75.0	83.5	62.5	84.7	96.9	76.9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
74.9	84.5	80.8	87.4	88.6	94.2	90.0	84.7	82.6	73.4	73.9	84.2	85.5	82.6	72.1	78.8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
83.3	98.6	78.6	75.5	81.3	84.0	86.5	89.9	97.3	87.8	84.1	82.9	82.8	72.4	76.5

CQS: 82.6

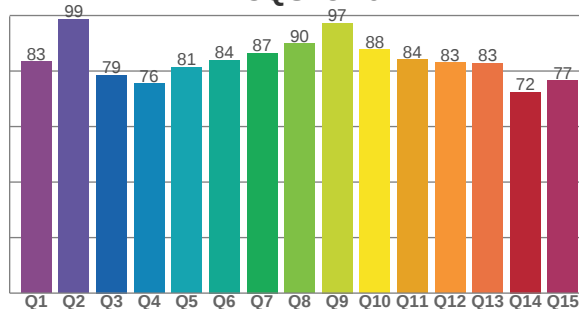

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5030 K	84.5	14.1	82.7	94.5	82.6	0.345	0.357	0.209	0.325	0.0001



TM30 Report







Rf 82.7

Fidelity index Rf

Rg 94.5

Gammut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	75	-11%	0%
2	85	-7%	5%
3	81	-4%	8%
4	87	-2%	5%
5	89	-2%	2%
6	94	0%	-1%
7	90	-5%	-2%
8	85	-8%	2%
9	83	-8%	11%
10	73	-4%	14%
11	74	3%	15%
12	84	6%	6%
13	85	7%	-7%
14	83	3%	-9%
15	72	-1%	-19%
16	79	-4%	-11%

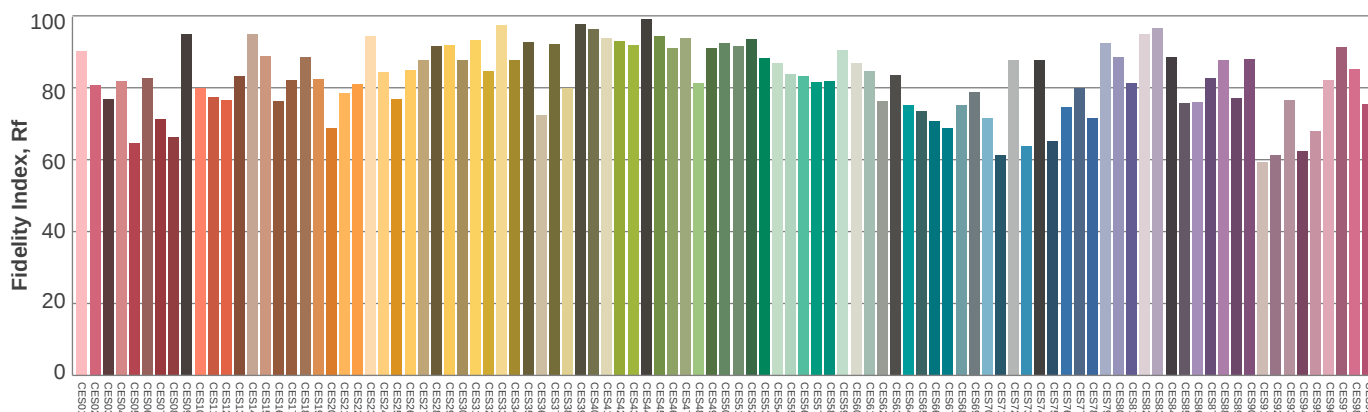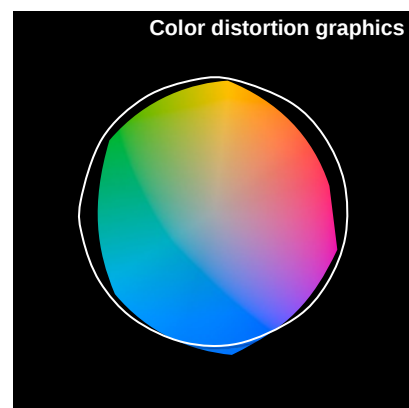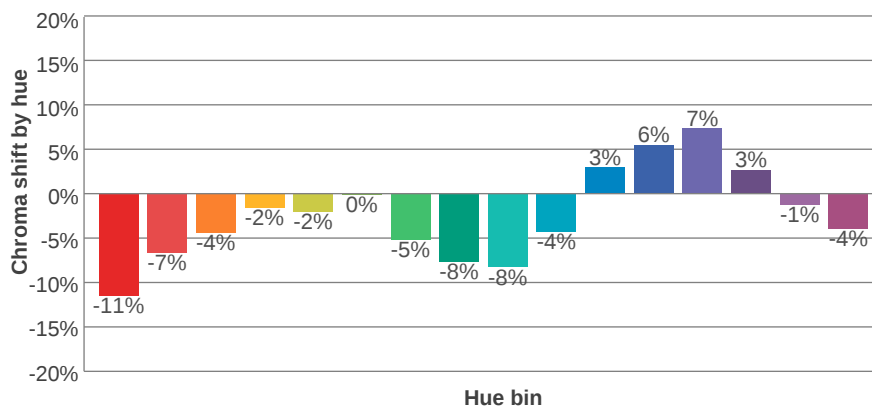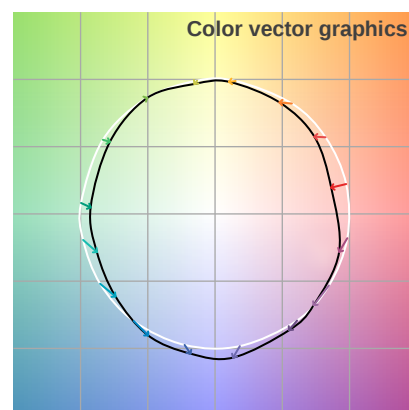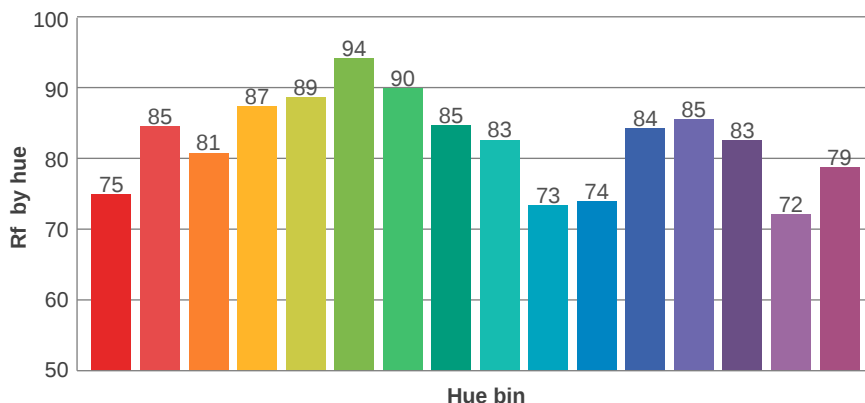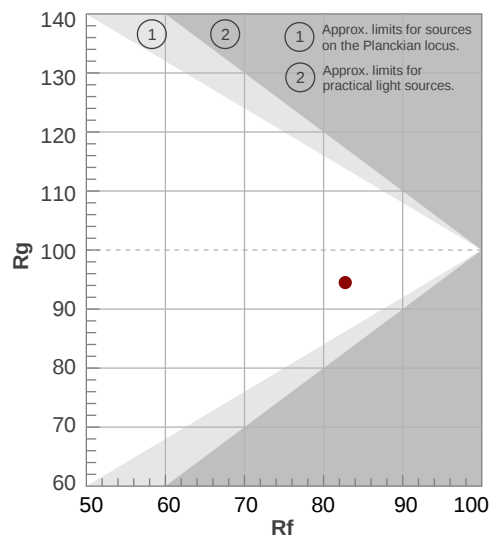

Color Evaluation Sample



Illumination

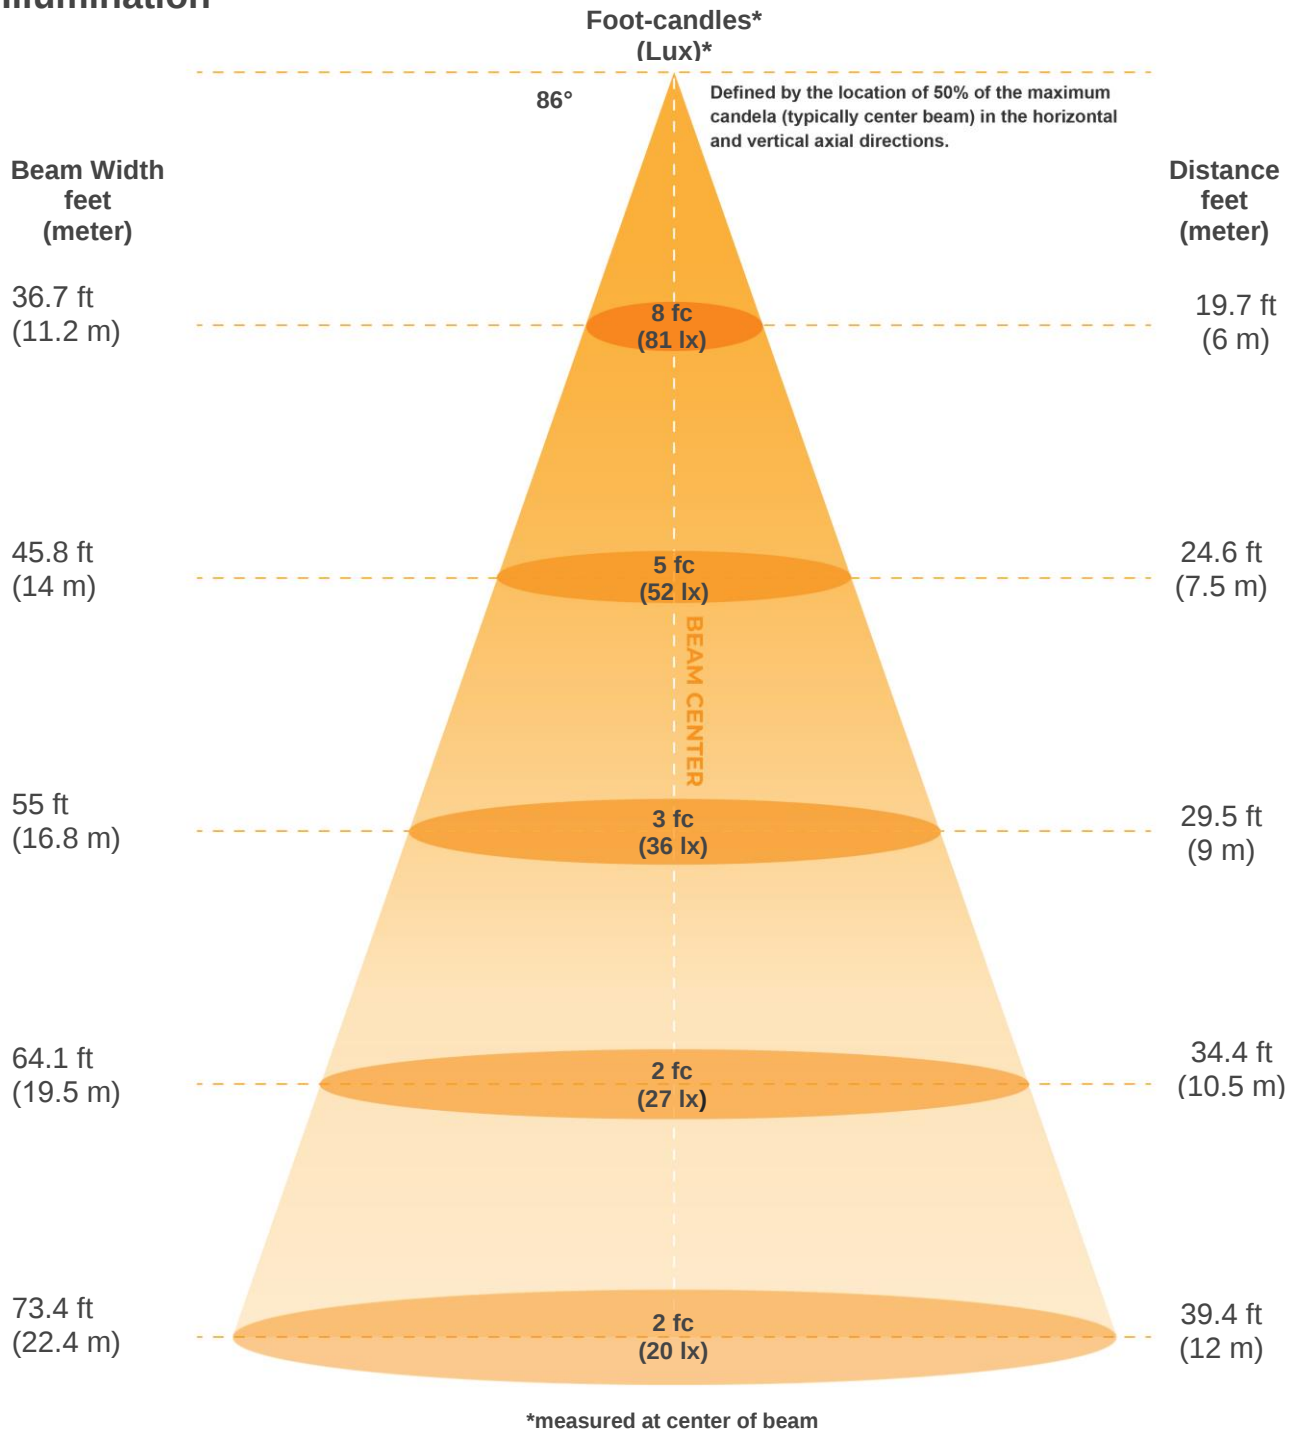

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2932lx	733lx	326lx	183lx	117lx	81lx	60lx	46lx	36lx	29lx	24lx	20lx	17lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx
272.4fc	68.1fcd	30.3fcd	17fcd	10.9fcd	7.6fcd	5.6fcd	4.3fcd	3.4fcd	2.7fcd	2.3fcd	1.9fcd	1.6fcd	1.4fcd	1.2fcd	1.1fcd	0.9fcd	0.8fcd	0.8fcd	0.7fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
86°	150.3°	167.9°	74.8%	44.3%



ISO Diagrams

ISO candela diagram

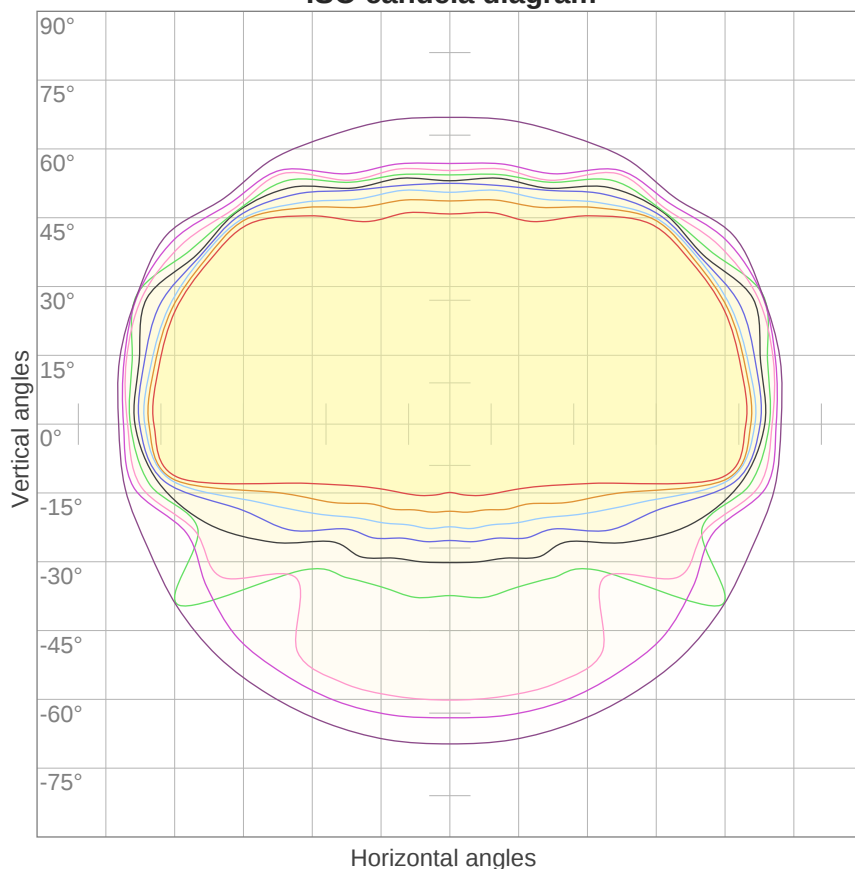


10%	293 cd
20%	586 cd
30%	880 cd
40%	1173 cd
50%	1466 cd
60%	1759 cd
70%	2052 cd
80%	2345 cd
90%	2639 cd

Conditions:

Number of c-planes: 16

Candela at center: 2932 cd

ISO lux diagram

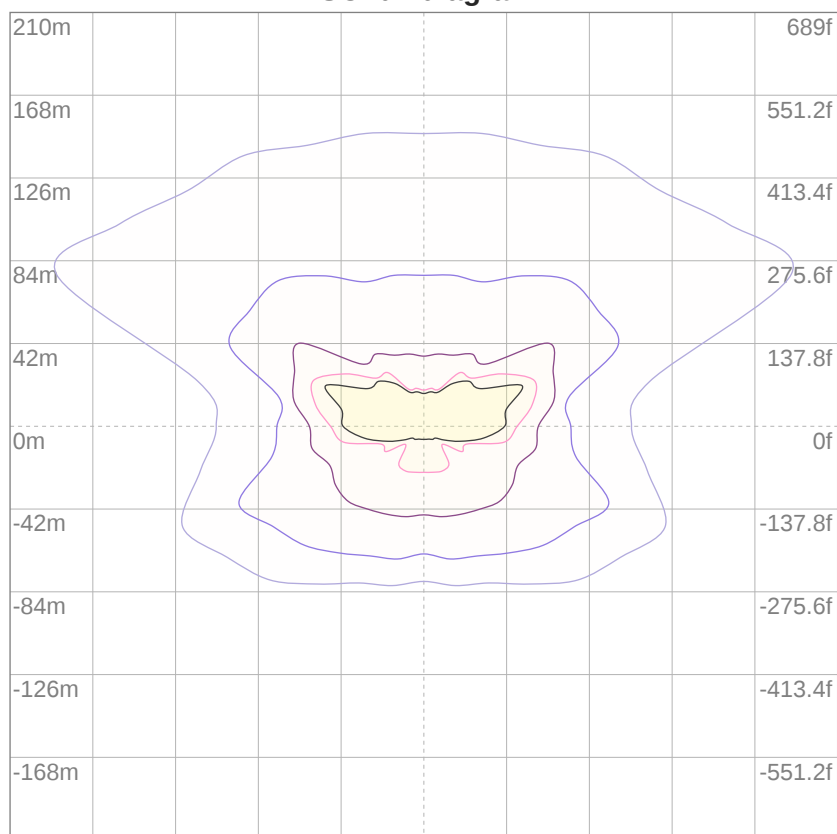

3%	0.880 lx
5%	1.47 lx
10%	2.93 lx
30%	8.80 lx
50%	14.7 lx

Conditions:

Number of c-planes: 16

Lux at center: 29.3 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Mounting height: 10 meters (33 feet)



T 314.743.3067
F 314.972.6202
email: commercial-sales@superbriteleds.com
www.superbriteleds.com/


Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	99	94	105	101	97	93	96	93	90	92	90	87	89	87	84	82
2	97	88	81	75	95	87	80	74	83	77	72	79	75	71	76	72	69	67
3	88	76	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	54
4	80	67	57	50	77	65	56	50	63	55	49	60	54	48	58	52	47	45
5	73	59	49	42	70	58	48	42	55	47	41	53	46	41	51	45	40	38
6	66	52	43	36	64	51	42	36	49	41	35	47	40	35	46	39	34	32
7	61	47	37	31	59	46	37	31	44	36	30	43	36	30	41	35	30	28
8	57	42	33	27	55	41	33	27	40	32	27	39	32	26	38	31	26	24
9	53	38	30	24	51	38	29	24	37	29	24	35	28	23	34	28	23	21
10	49	35	27	21	48	35	27	21	34	26	21	33	26	21	32	25	21	19

LAMPS (number of lamps)

Luminaire budgetary diagram

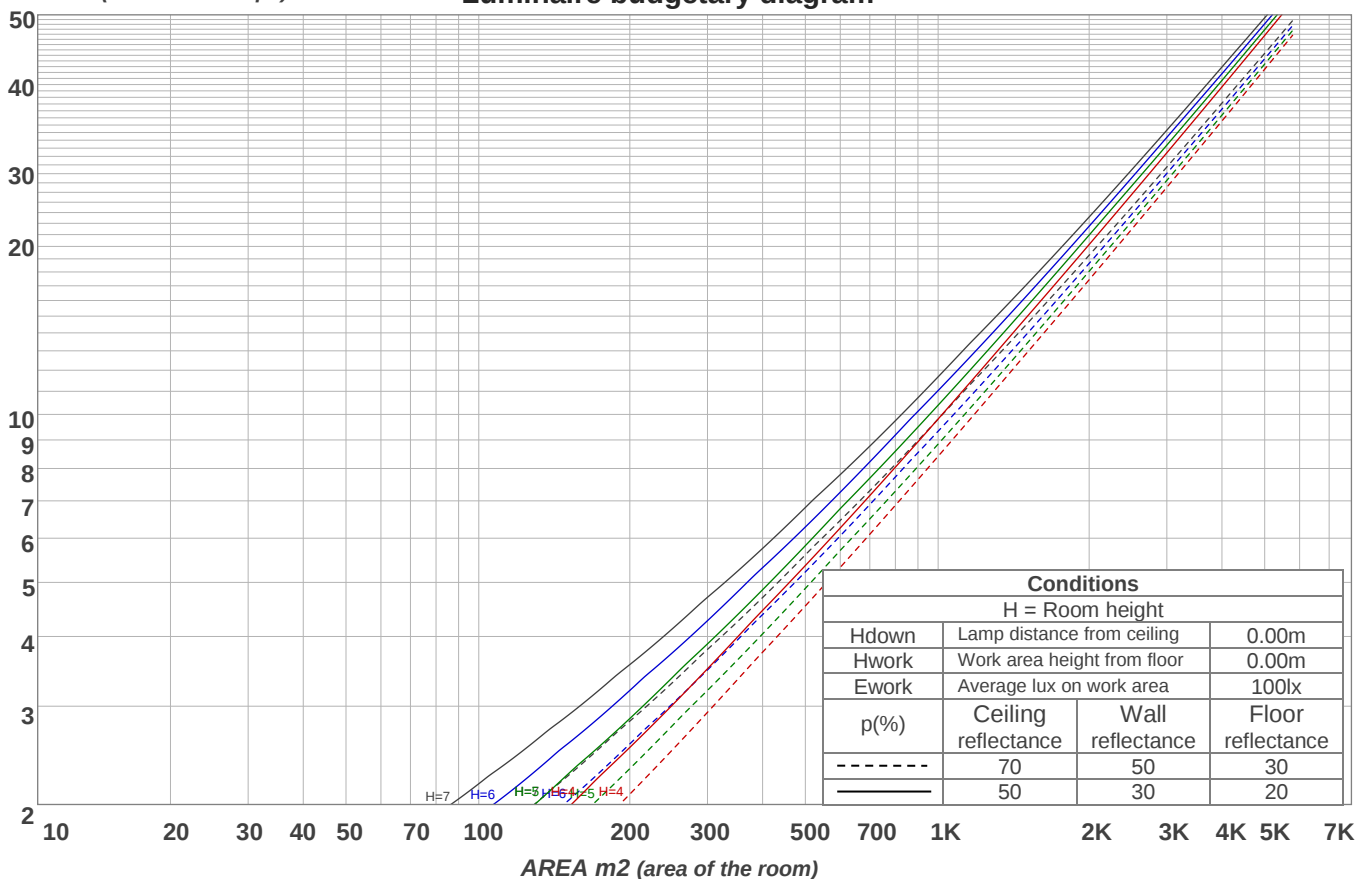

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
270 lm	801 lm	1373 lm	2116 lm	2540 lm	2614 lm	2114 lm	954 lm	163 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
6.08 lm	3.80 lm	4.37 lm	4.75 lm	5.01 lm	4.56 lm	4.07 lm	2.22 lm	1.02 lm




Road Report

LCS table


BUG rating:	B3 U2 G3	
Forward light	Lumens	Lumens %
Low(0-30):	1293.6	10%
Medium(30-60):	3606	27.8%
High(60-80):	1516.7	11.7%
Very high(80-90):	66.9	0.5%
Back light		
Low(0-30):	1293.6	10%
Medium(30-60):	3606	27.8%
High(60-80):	1516.7	11.7%
Very high(80-90):	66.9	0.5%
Uplight		
Low(90-100):	5.2	0%
High(100-180):	29.7	0.2%

LCS graph

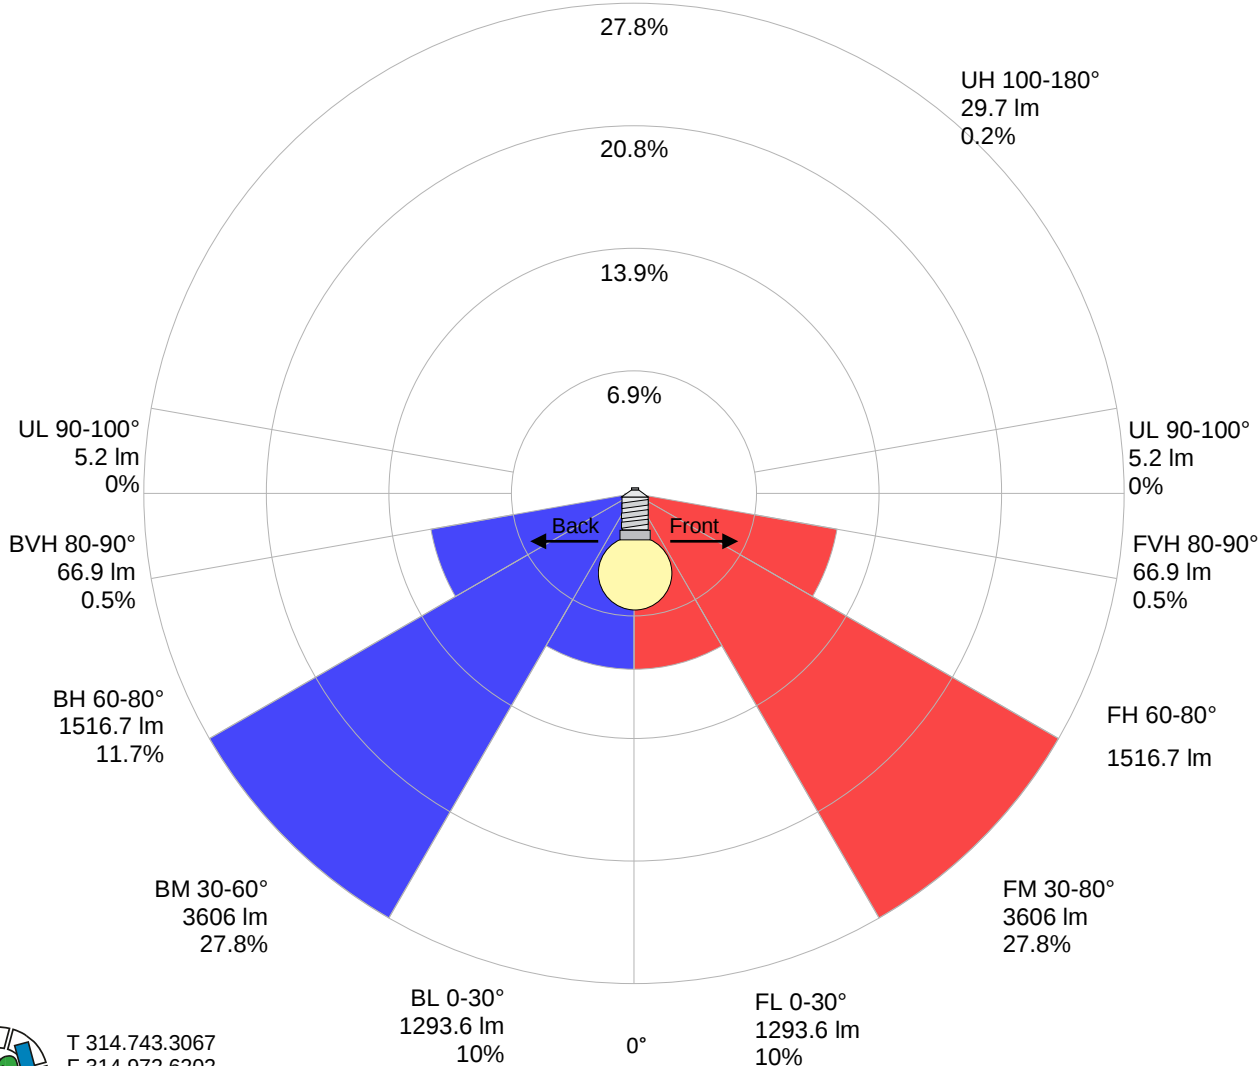

Stabilization

Warmup curve

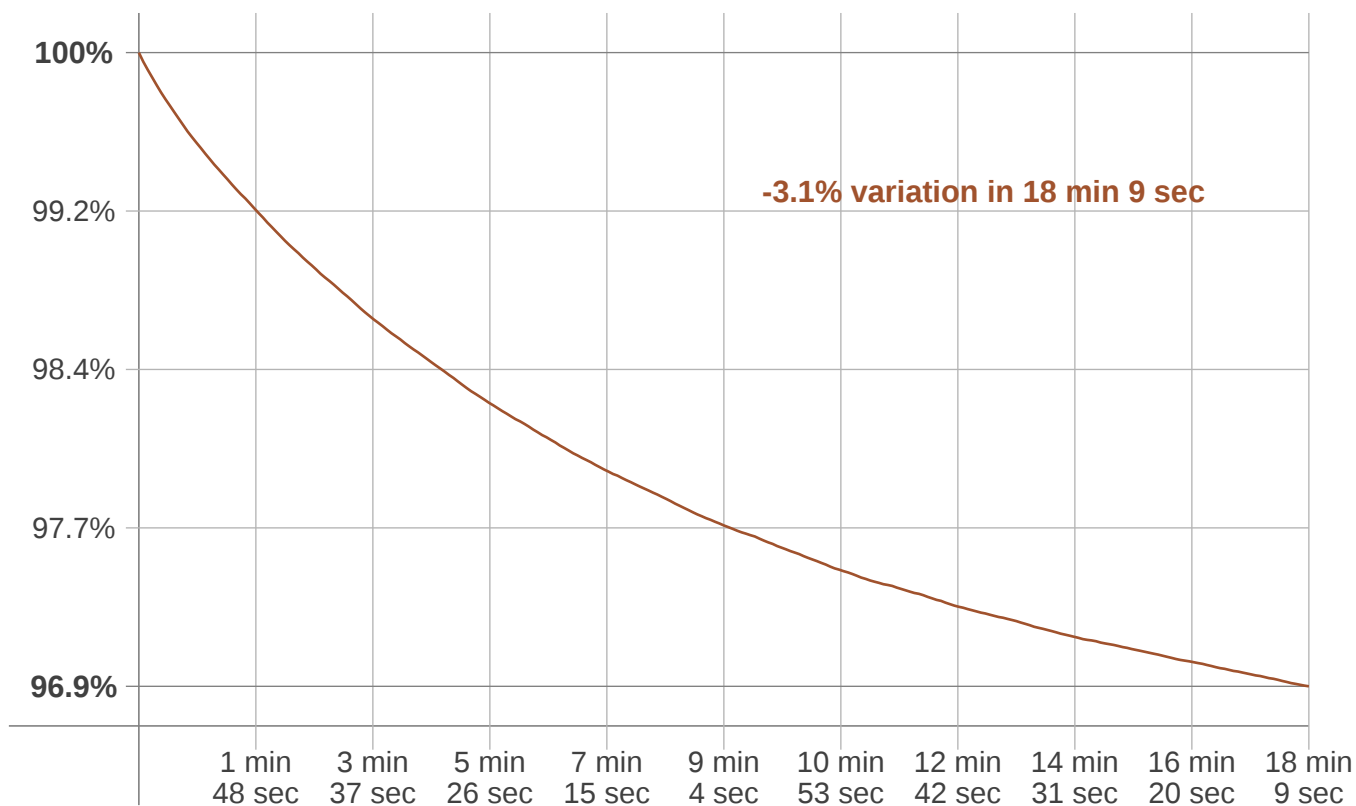

Warmup result

Warmup time:	18 min 9 sec
Warmup variation	-3.1%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
4973 K	+57 K	5030 K

Output change

Output start	Output change	Output end
13381 lm	-401 lm	12980 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

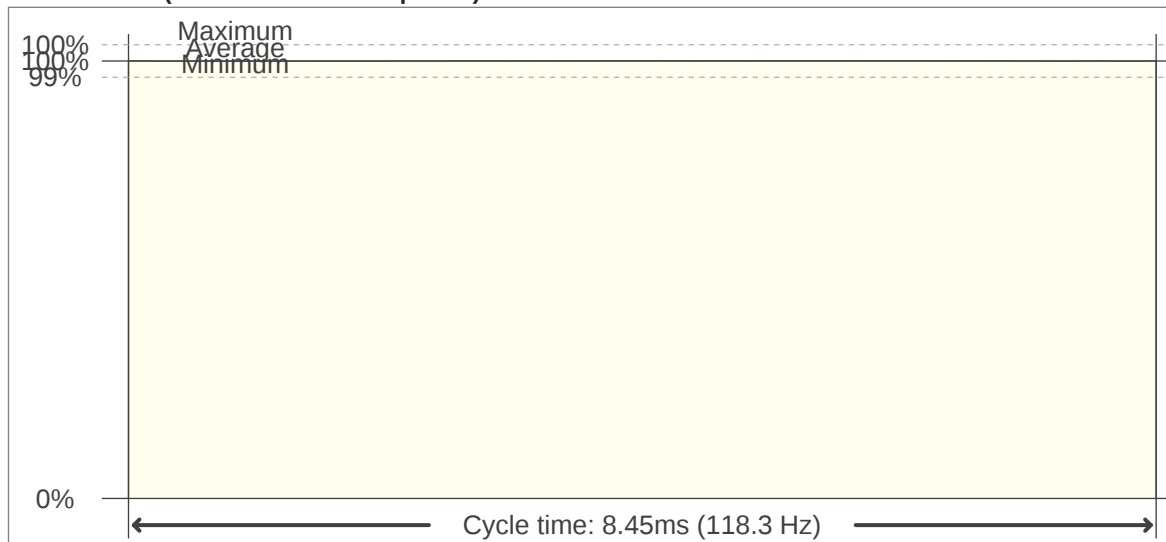

Flicker FFT (frequency scope of flicker curve)

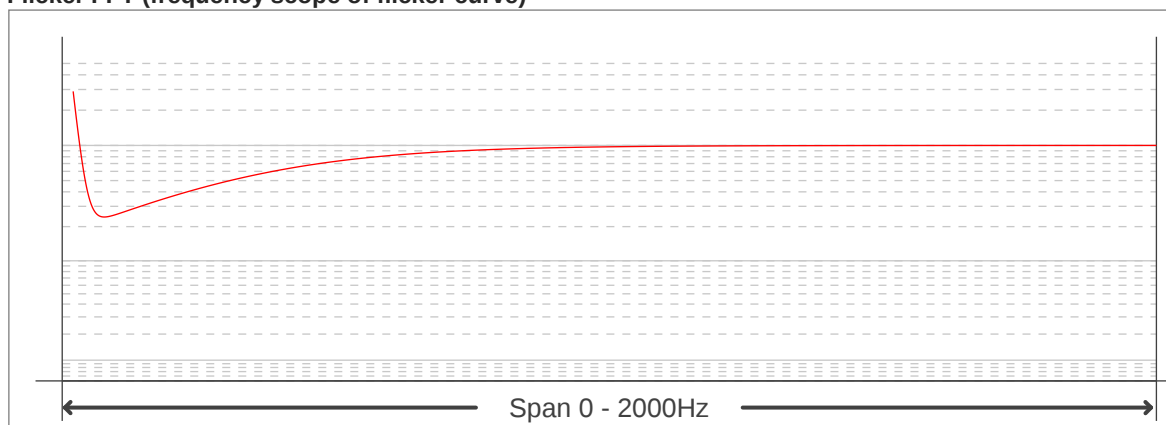

Flicker results:

Flicker frequency:	118.34 Hz
Flicker index:	0
Flicker percentage:	0.08 %
SVM: (Visual flicker)	0

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

