Important: Read all instructions prior to installation.

LED UFO High Bay Light

UHBC-50K150-BLDOB

Installation

1. Insert eye bolt into threaded hole on top of fixture and tighten, then tighten set screw.
2. Connect the fixture by plugging 5-15P cable into an appropriate outlet. Protected GFCI outlet is required in any are where the light may come into contact with water or other liquid.
3. Hang fixture by attaching eye bolt to an existing hook or carabiner (SBL number HBU-CARB).

Safety and Notes

• Product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
• To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
• Avoid looking directly into the lamp when illuminated.
• Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
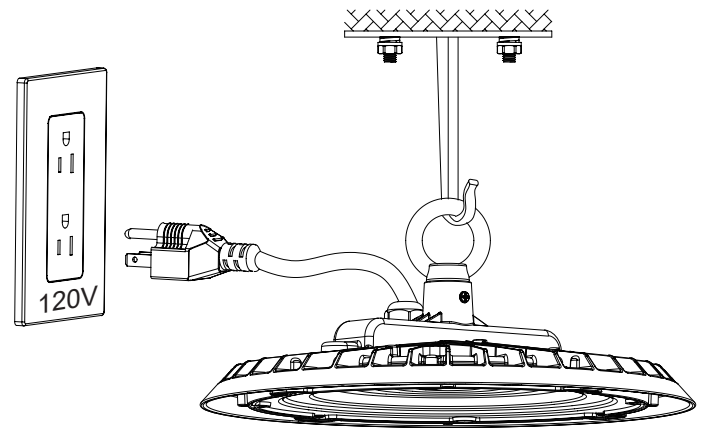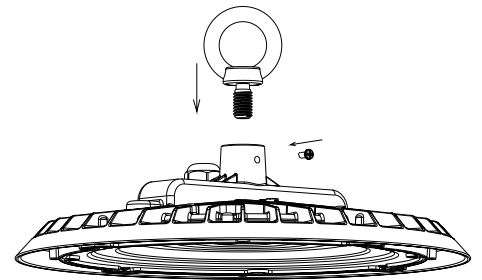
Specifications

Model	UHBC-50Kx-BLDOB
Operating Temperature	-4°–113° F (-20°–45° C)
Environmental Rating	IP65
Dimming	none

Check product label for specific electrical specifications related to installation. Improper installation will void warranty.