

## Vapor Tight LED Linear Fixture



T8 Vapor Tight Fixture Specifications

Project \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_



**VTLF-4T8-XXW-YYK**



### Available Models<sup>1</sup>

- VTLF-2T8-XXW-YYK
- VTLF-4T8-XXW-YYK

### Part Number Breakdown

Example: VTLF-2T8-XXW-YYK

Series	LED Tube Capacity	Wattage	CCT
<b>VTLF</b> [Vapor Tight Linear Fixture]	<b>2T8</b> [2x T8 tubes]	<b>XXW</b> [Bundled Tube Wattage]	<b>YYK</b> [Bundled Tube CCT]
	<b>4T8</b> [4x T8 tubes]		

### Overview

The 4ft LED Ready T8 Vapor Tight Light Fixture is tri-proof (resistant to fumes, moisture, and debris) making it ideal for installation in harsh commercial or industrial environments. Each fixture includes a water-tight cord connector and push-release terminals for secure electrical connections. Housing clips and surface-mount brackets are also included for simple installation in industrial or commercial locations. The fixture holds two double-ended type B T8 bulbs. Purchase just the light fixture or the fixture with LED T8 tubes in 4000K or 5000K.

### Features

- Durable, impact-resistant polycarbonate construction
- IP65 rated, protected against debris and moisture
- Holds two Type B LED T8 lamps
- Fluorescent T8 tube equivalent (2x or 4x 32W)

### Product Details

- Polycarbonate housing and lens
- Surface mount hardware included
- IP65, Water Resistant and Vapor Tight
- 100-277 VAC input

### Certifications and Compliances

- ETL Listed - UL 1598
- CE compliant



### Applications

- Car Washes
- Gas Stations
- Industrial Facilities
- Laundry Facilities
- Manufacturing Plants

### Warranty

- Lifetime Warranty




## Vapor Tight LED Linear Fixture

T8 Vapor Tight Fixture Specifications

SPECIFICATIONS		
Model	VTLF-2T8-XXW-YYK	VTLF-4T8-XXW-YYK
<b>ELECTRICAL</b>		
Operating Voltage	100-277 VAC	
Wattage (max)	22 W per tube	
Ballast Compatibility	Type B (Ballast Bypass)	
Dimmer Type	None	
<b>MECHANICAL</b>		
Base Type	G13 (Bi-Pin)	
Bulb Type	T8	
LED Tube Wiring	Dual Ended	
Input Type	Terminal Block	
Product Materials	Polycarbonate Housing and Lens	
Finish	Gray Housing, Clear Lens	
Mount Type	Junction Box, Surface Mount	
Length	48 in. (4 ft)	
<b>ENVIRONMENTAL</b>		
IP Rating	IP65	
Environmental Rating	Water-Resistant	
Ambient Operating Temperature	-35 to 45°C (-31 to 113°F)	

### Wiring Diagram

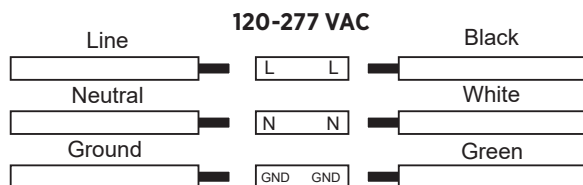


## Vapor Tight LED Linear Fixture

T8 Vapor Tight Fixture Specifications

### Dimensional Drawings

VTLF-2T8-XXW-YYK

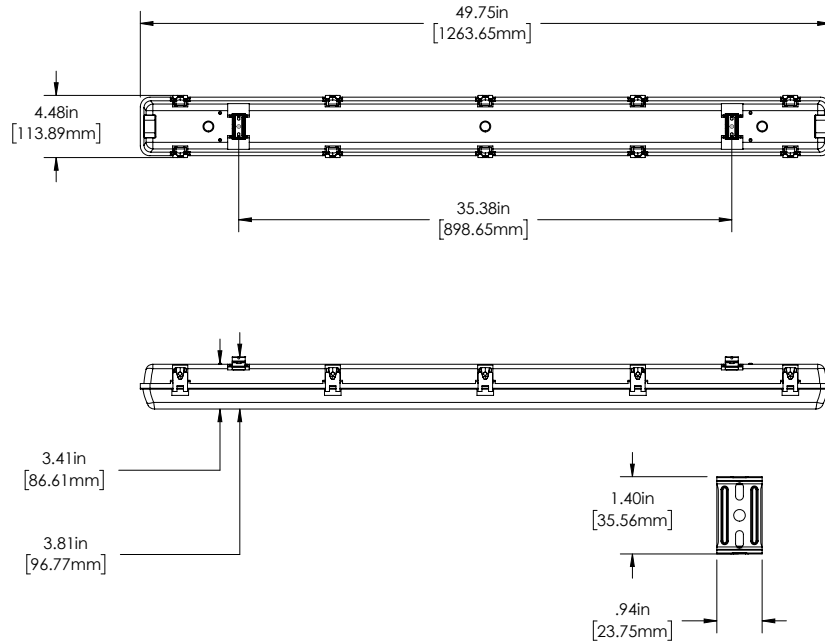

VTLF-4T8-XXW-YYK

