

**Important:** Read all instructions prior to installation.

## LED Ready Landscape Well Light



LFB-W01    LFB-W02    LFB-W03    LFB-W04    LFB-W06

### Safety and Notes

- For use with OUTDOOR, low-voltage landscape lighting systems ONLY.
- NOT FOR USE with submersible or pool/spa equipment.
- Do not submerge in water, the product can be damaged.
- For low voltage use only. Power supply voltage must match installed bulb.
- LFB-W01, LFB-W02, LFB-W03, and LFB-W04 are designed for MR16 (GU5.3 base) bulbs only. LFB-W06 is designed for PAR36 bulbs only. Bulb not included.
- The housing for LFB-W06 can be installed two ways—for a flat or slanted top—depending on preference.

### Recommended Accessories



Part Number	Description
WWN-2212	silicone filled twist-on wire connector
SFT-20	self fusing silicone tape
WP14-2DB	14 gauge landscape wire
WP12-2DB	12 gauge landscape wire

### Installation Instructions


1. Install compatible bulb.
2. Lay fixtures out as they will be installed.
3. Run landscape wire from power supply to each light. Wire must be within 3" of mounting stake to allow power connections to be made.
4. Use waterproof connectors to connect lights to supply wires as well as wires running to additional lights.
5. Dig out an appropriate hole for and install the fixture.
6. Turn on power supply and ensure all fixtures are working. If one or more individual fixtures are not working, check each connection. It is recommended to wrap all connections in electrical or self-fusing tape.
7. Bury landscape wire, fixture pigtails, and connectors. A depth of 3" is recommended. Wires and connectors can also be covered by mulch or stone.

### Assembly

LFB-W01 cap    LFB-W02 cap    LFB-W03 cap    LFB-W04 cap



LFB-W06

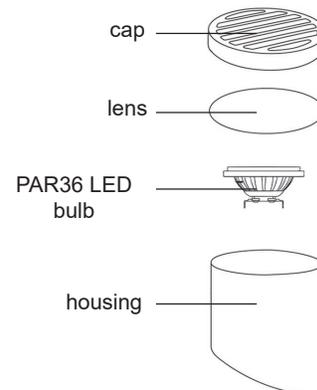

Note: LFB-W02 shown, others are similar.