

Important: Read all instructions prior to installation.

Chase Light Bars

Included Parts




- ① Chase light bar
- ② Wire harness with rocker switch
- ③ Wire harness with in-line dual switch
- ④ 3 Pin extension cable
- ⑤ Multifunction wire
- ⑥ Mounting brackets & screws

Remote Instructions

In-Line switch

Rocker switch

1. ON/OFF Switch.
2. Press down switch for 3 seconds to turn ON/OFF the strobe lights.
Note: Amber strobe pattern is 1 solid, 8 flashing strobe
3. Wiring harness includes two wire types for connecting. Choose per individual application.

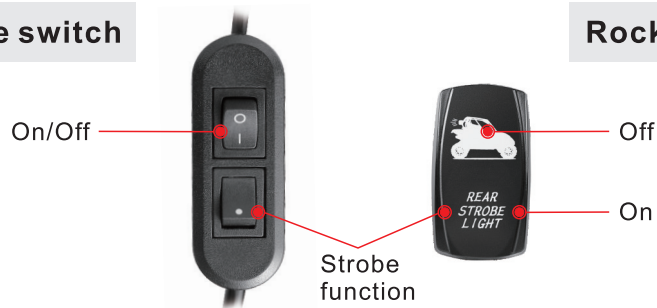

Specifications


Environmental Specifications

Operating Temperature	-30°-60° F (-22°-140° C)
IP Rating	IP65



Important: Read all instructions prior to installation.

Installation Instructions

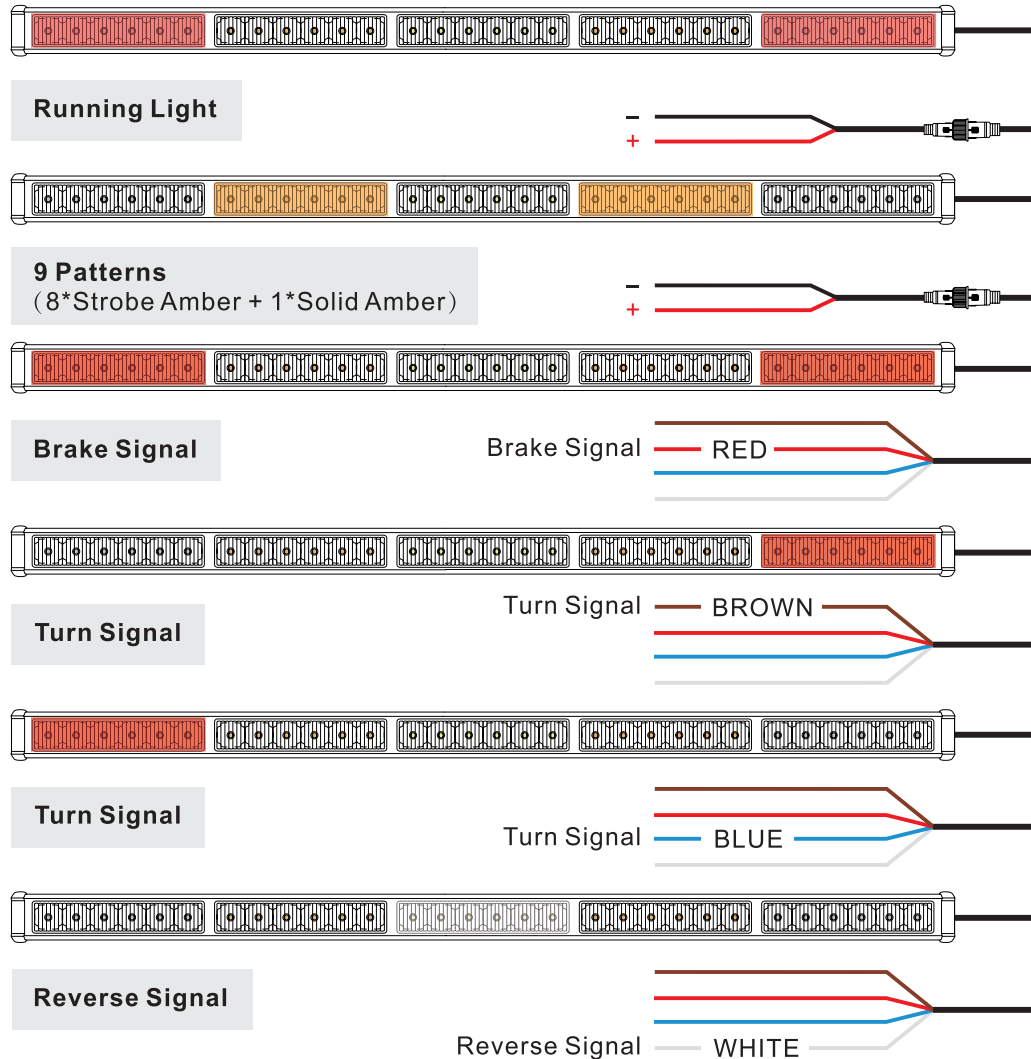

1. Gather All Hardware.

Professional installation recommended. Collect all mounting hardware and tools for installation. Zip ties, wire stripper tool and waterproof wire connectors needed.

2. Position Mounts / Drill Holes

Attach mounting hardware to lightbar. Attach mounting hardware to vehicle and secure using the provided hardware.

3. Route Wiring.

Plan out wiring connections and lay and tuck wiring. Organize using zip ties.

4. Wiring.

Make all wiring connections according the wiring diagrams above.

DT connectors are available if application needs it. Spade connectors on wiring harness attach to positive and negative terminals on the battery.

Red running light is always on when light bar is powered.

Note: Brake and turn signal functions require relays to work properly.

Note: 4-door-models may require the 3-pin extension cable.

