

Light efficiency:

108 Lumen/Watt

Light quality:

CRI: 71.6

Color temperature:


4076 K

Output: 3835 lm

Peak: 1602 cd

Power: 35.6 W

PF: 0.99

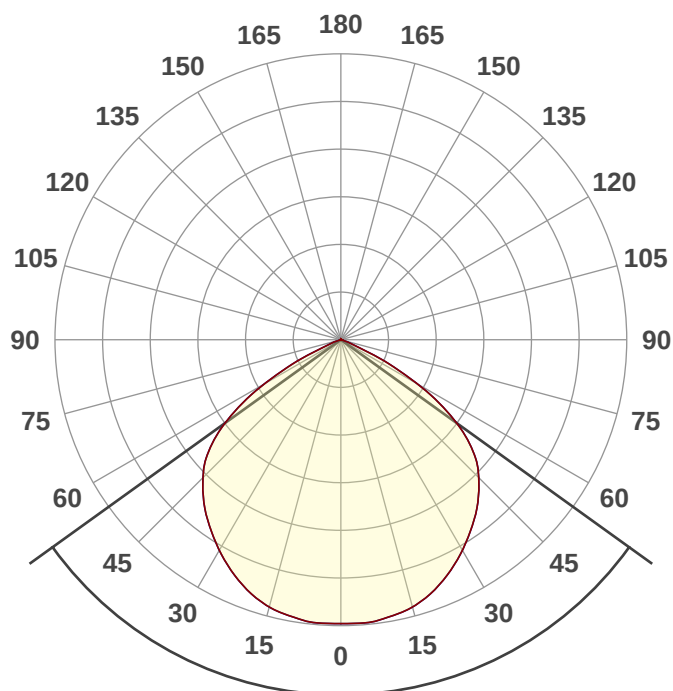

Beam angle

108.5°




CIE 1931


x: 0.378

y: 0.376

Spectra

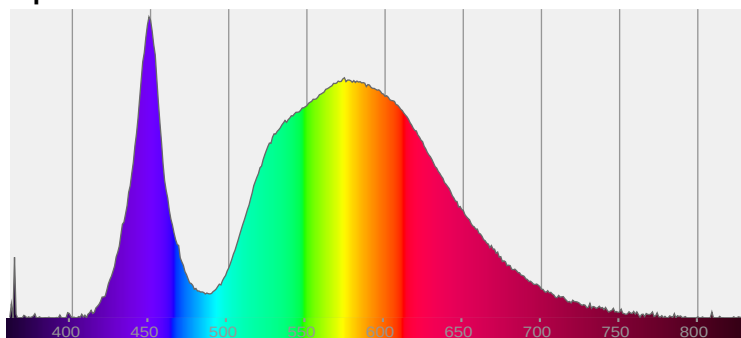

Power

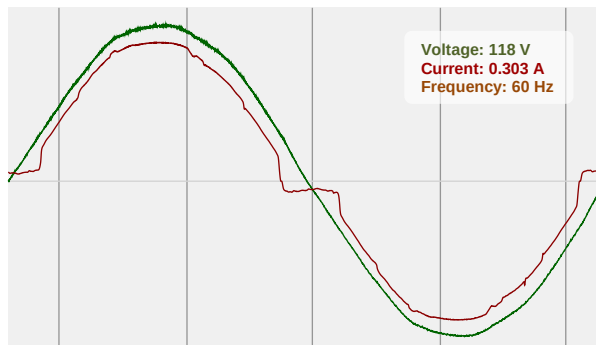



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

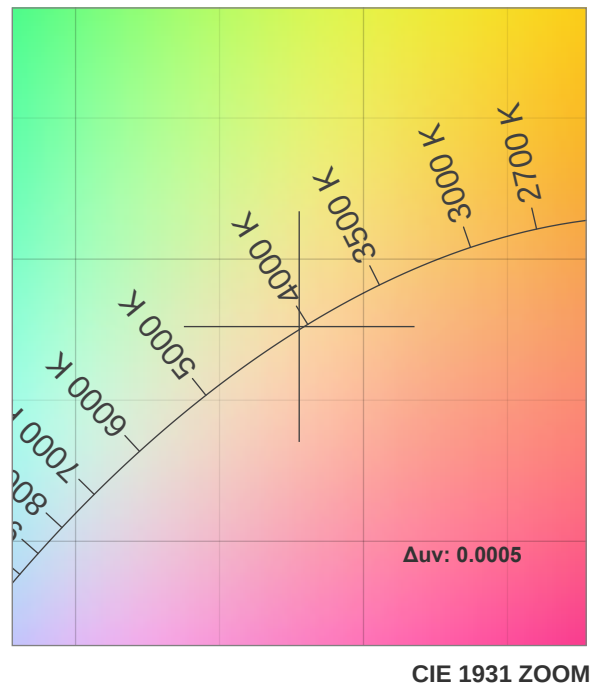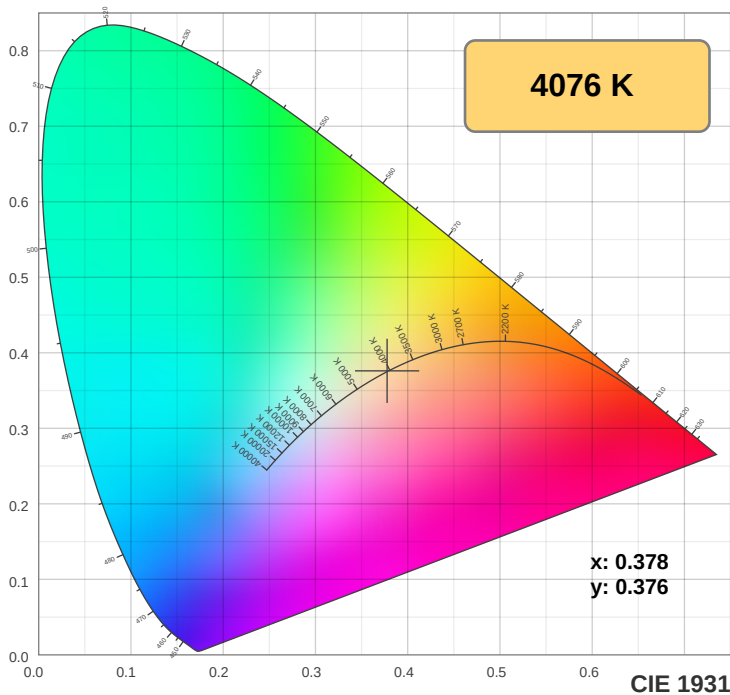

TM30: 69.4

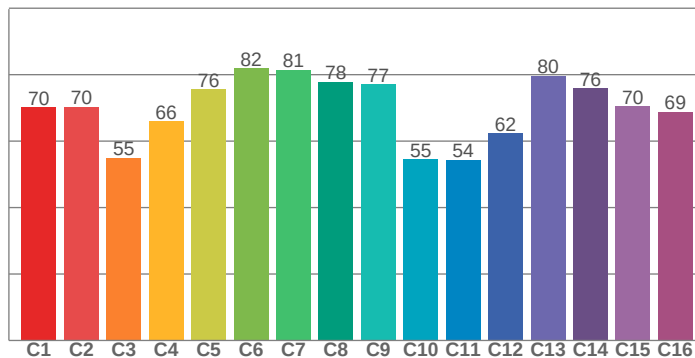

CRI: 71.6 (R1-R8)

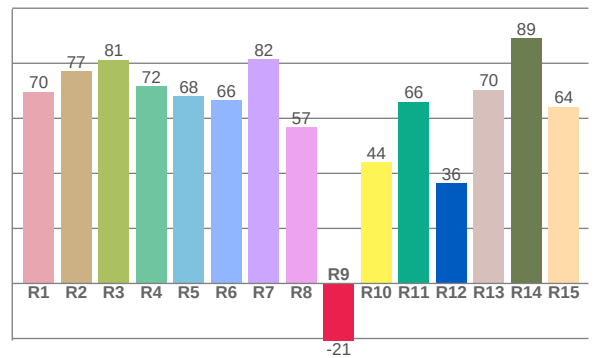

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
69.6	77.1	81.3	71.5	68.1	66.5	81.5	56.8	-20.7	44.0	66.0	36.3	70.4	89.0	64.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
70.2	70.3	55.0	65.9	75.6	81.9	81.4	77.8	77.1	54.6	54.3	62.3	79.6	75.8	70.4	68.8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
76.3	94.7	61.2	57.2	66.9	68.9	71.9	82.1	91.0	74.4	69.8	71.1	73.5	61.5	67.0

CQS: 70.7

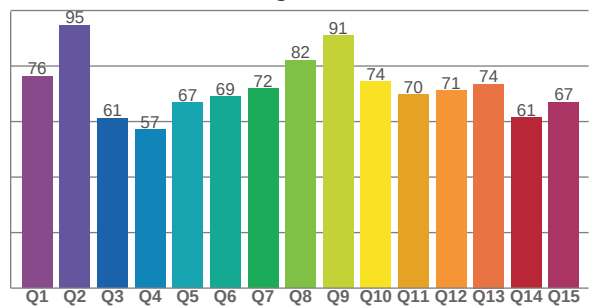

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4076 K	71.6	-20.7	69.4	95.1	70.7	0.378	0.376	0.224	0.334	0.0005



TM30 Report







Rf 69.4

Fidelity index Rf


Rg 95.1

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	70	-16%	-3%
2	70	-12%	9%
3	55	-6%	21%
4	66	4%	19%
5	76	10%	11%
6	82	10%	-3%
7	81	-1%	-11%
8	78	-9%	-9%
9	77	-14%	1%
10	55	-17%	18%
11	54	-3%	28%
12	62	6%	19%
13	80	14%	2%
14	76	11%	-5%
15	70	4%	-19%
16	69	-5%	-18%

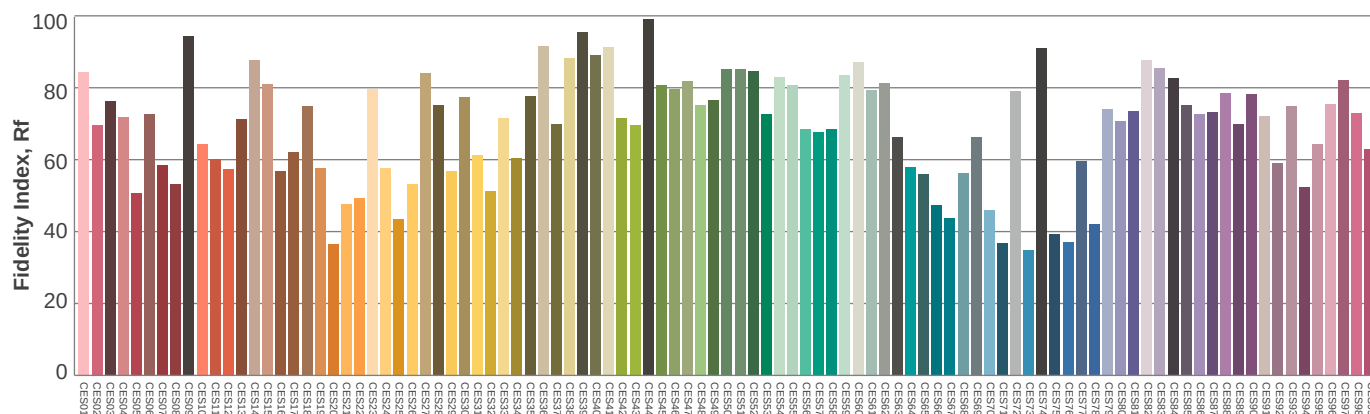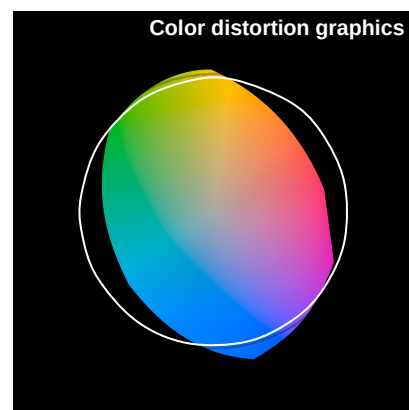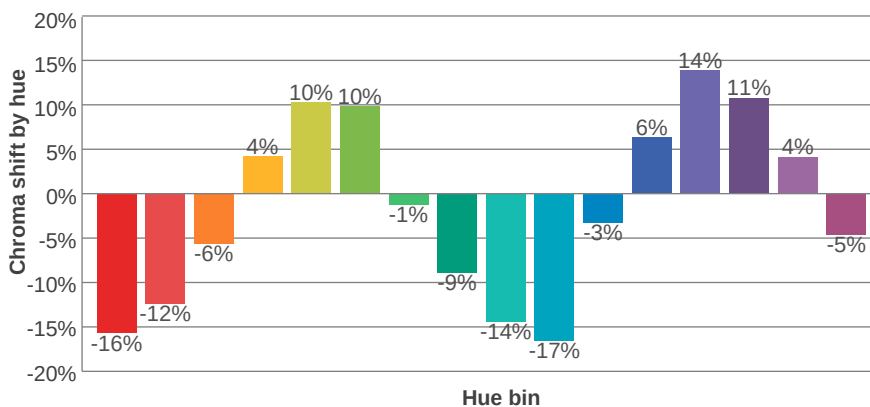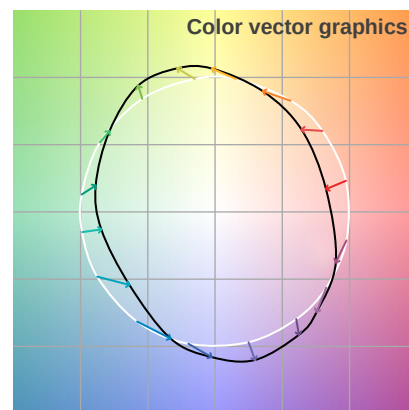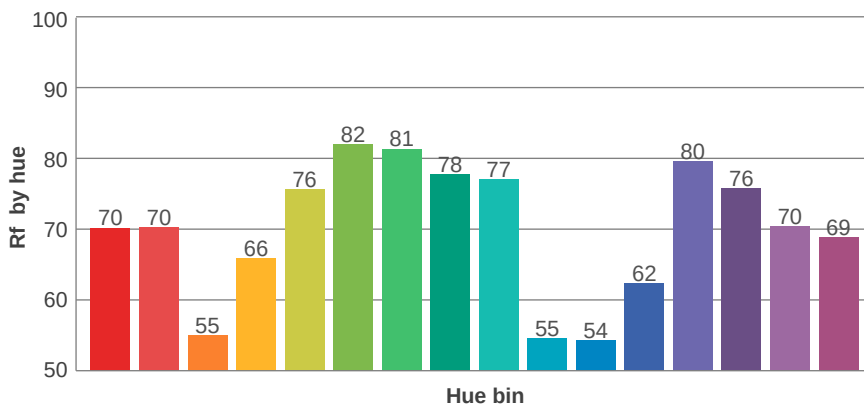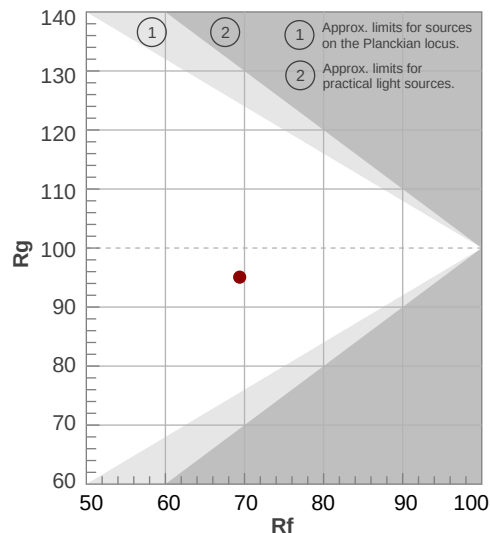

Illumination

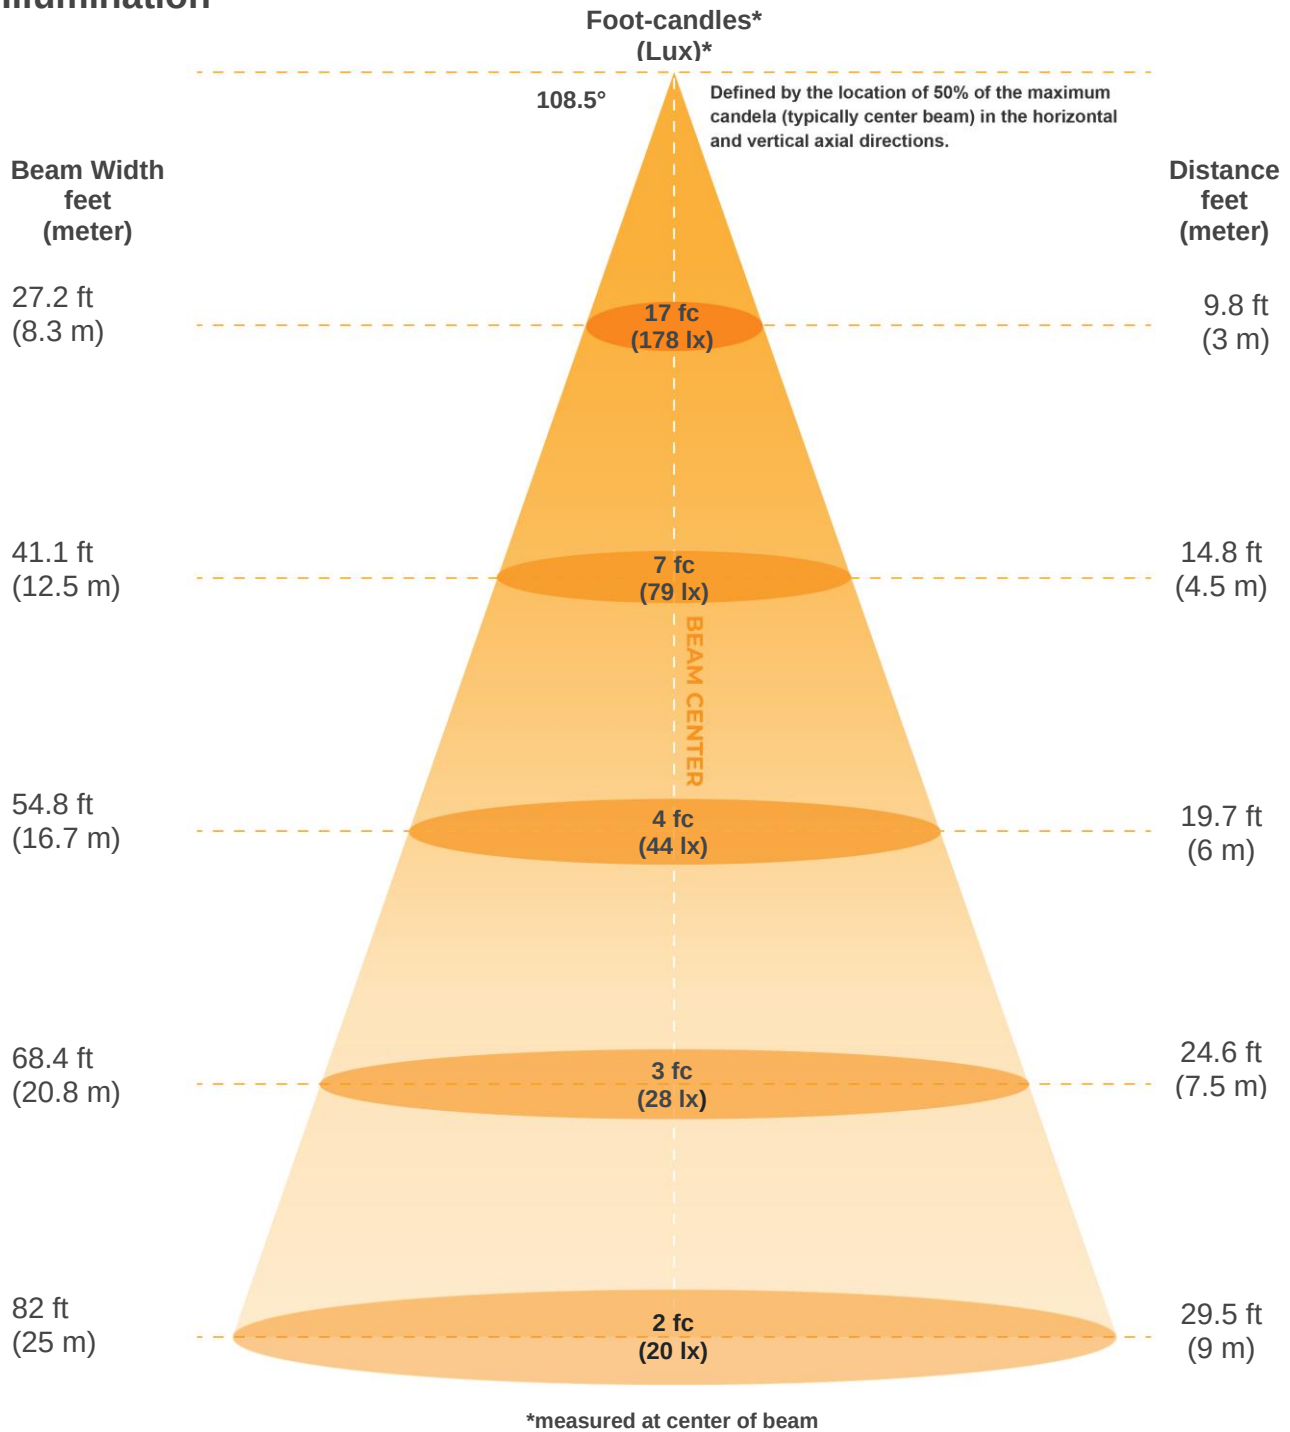

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1602lx	400lx	178lx	100lx	64lx	44lx	33lx	25lx	20lx	16lx	13lx	11lx	9lx	8lx	7lx	6lx	6lx	5lx	4lx	4lx
148.8fc	37.2fcd	16.5fcd	9.3fcd	6fcd	4.1fcd	3fcd	2.3fcd	1.8fcd	1.5fcd	1.2fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
108.5°	132.7°	141.2°	93.5%	64.9%



ISO Diagrams

ISO candela diagram

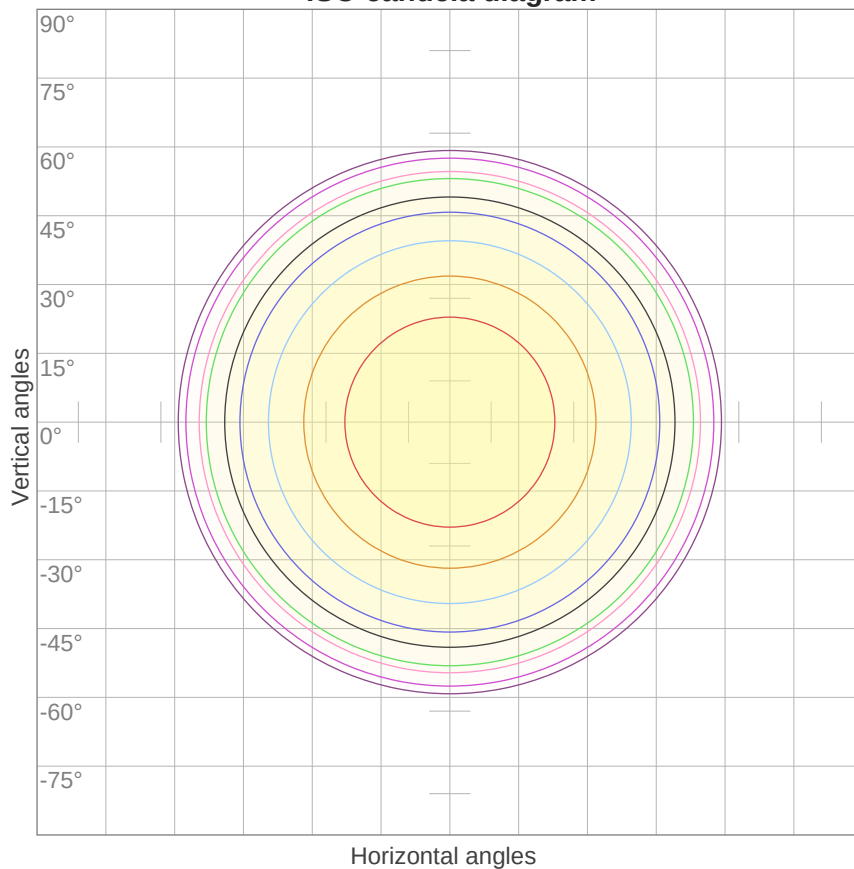


10%	160 cd
20%	320 cd
30%	481 cd
40%	641 cd
50%	801 cd
60%	961 cd
70%	1121 cd
80%	1282 cd
90%	1442 cd

Conditions:

Number of c-planes: 16

Candela at center: 1602 cd

ISO lux diagram

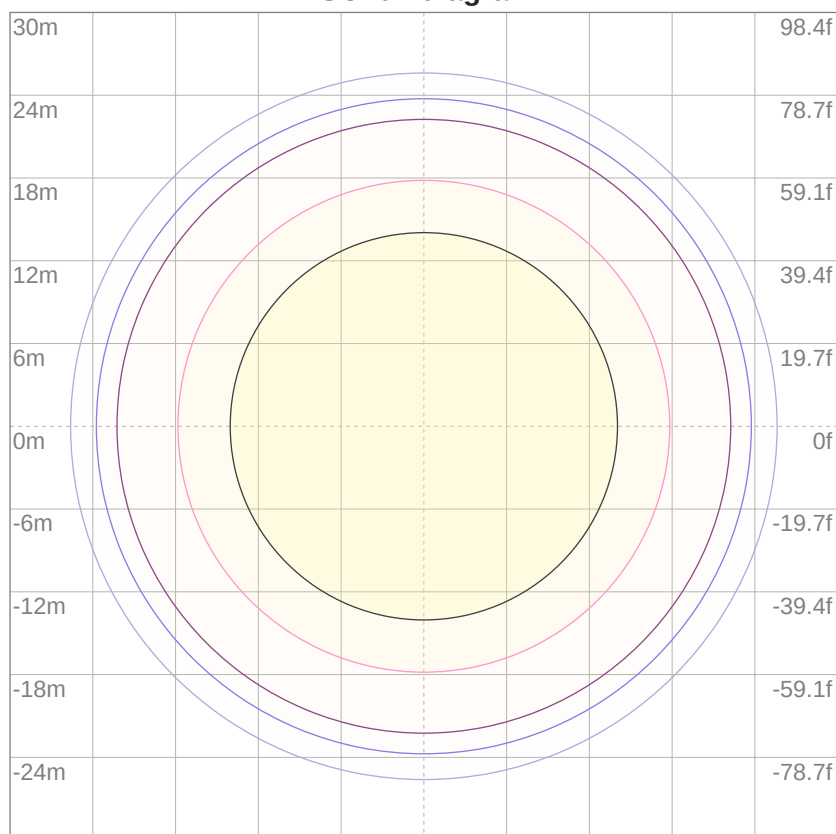

3%	0.481 lx
5%	0.801 lx
10%	1.60 lx
30%	4.81 lx
50%	8.01 lx

Conditions:

Number of c-planes: 16

Lux at center: 16.0 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	81	79	77
3	95	85	78	73	92	84	77	72	81	76	71	78	74	70	76	72	69	67
4	87	77	69	63	85	75	68	62	73	66	62	71	65	61	68	64	60	58
5	80	69	61	55	78	68	60	54	66	59	54	64	58	53	62	57	53	51
6	74	62	54	48	73	61	53	48	59	53	47	58	52	47	56	51	47	45
7	69	56	48	43	67	56	48	42	54	47	42	53	47	42	51	46	42	40
8	64	52	44	38	63	51	43	38	50	43	38	48	42	38	47	42	37	35
9	60	47	40	34	59	47	39	34	46	39	34	45	38	34	44	38	34	32
10	56	44	36	31	55	43	36	31	42	36	31	41	35	31	40	35	31	29

LAMPS (number of lamps)

Luminaire budgetary diagram

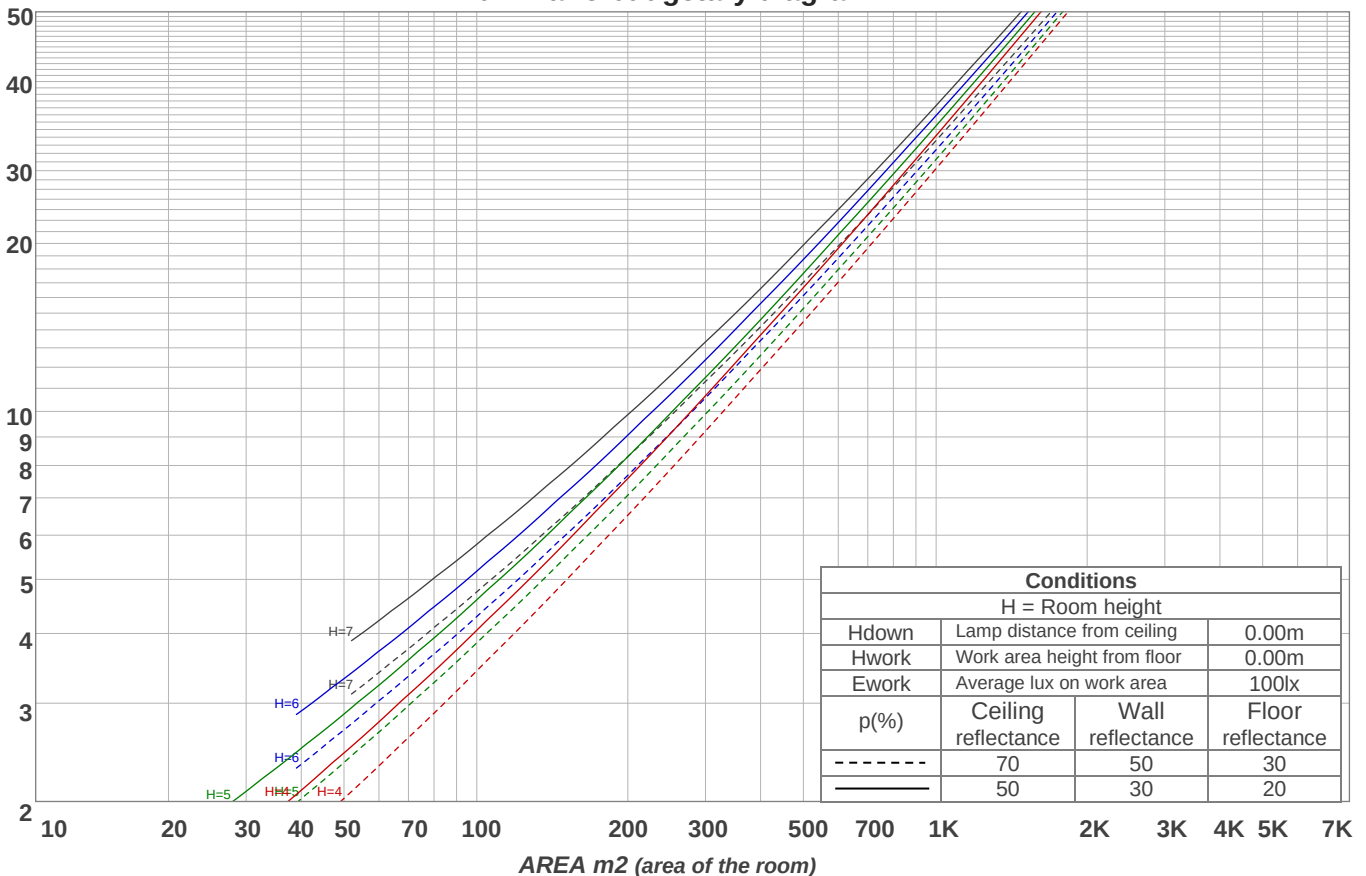

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
152 lm	440 lm	666 lm	806 lm	845 lm	676 lm	226 lm	10.2 lm	2.18 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
1.21 lm	1.26 lm	1.32 lm	1.35 lm	1.39 lm	1.25 lm	0.986 lm	0.675 lm	0.232 lm




Road Report

LCS table


BUG rating:	B2 U1 G0	
Forward light	Lumens	Lumens %
Low(0-30):	628.7	16.4%
Medium(30-60):	1160.5	30.3%
High(60-80):	122.2	3.2%
Very high(80-90):	1.1	0%
Back light		
Low(0-30):	628.7	16.4%
Medium(30-60):	1160.5	30.3%
High(60-80):	122.2	3.2%
Very high(80-90):	1.1	0%
Uplight		
Low(90-100):	1.2	0%
High(100-180):	8.5	0.2%

LCS graph

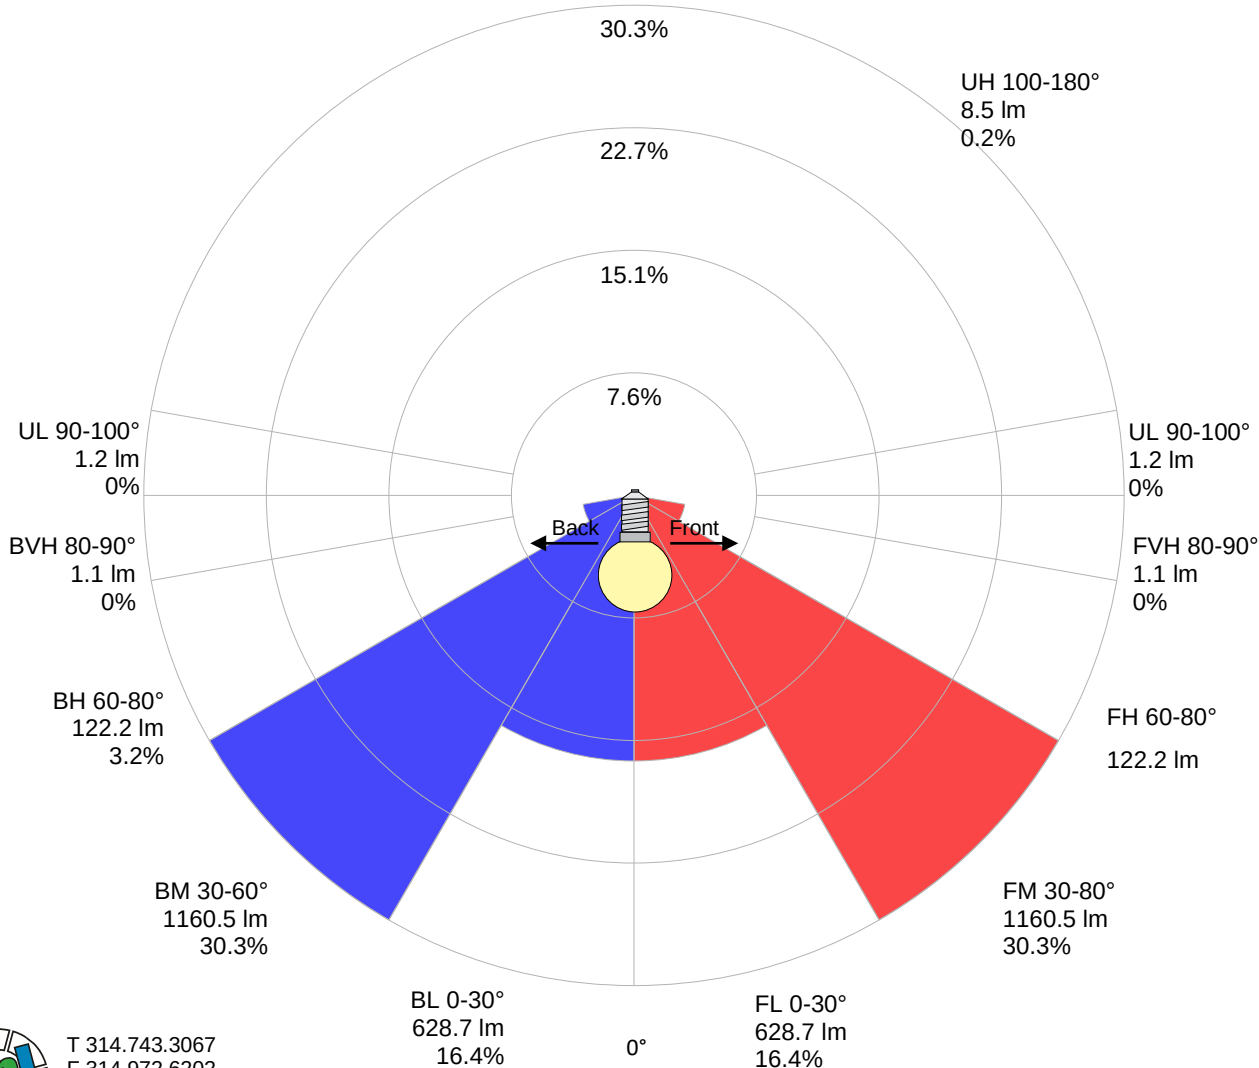

Stabilization

Warmup curve

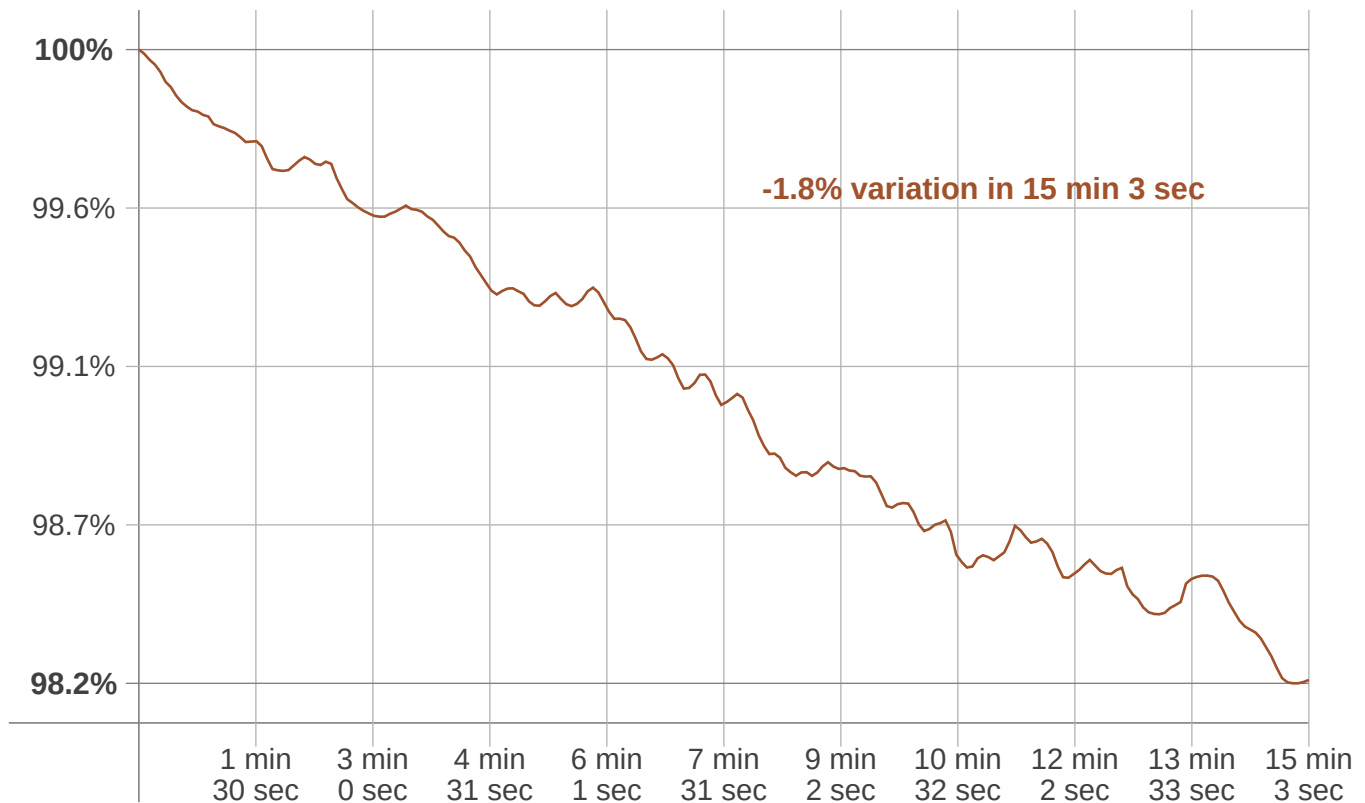

Warmup result

Warmup time:	15 min 3 sec
Warmup variation	-1.8%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
4062 K	+14 K	4076 K


Output change

Output start	Output change	Output end
3890 lm	-56 lm	3835 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

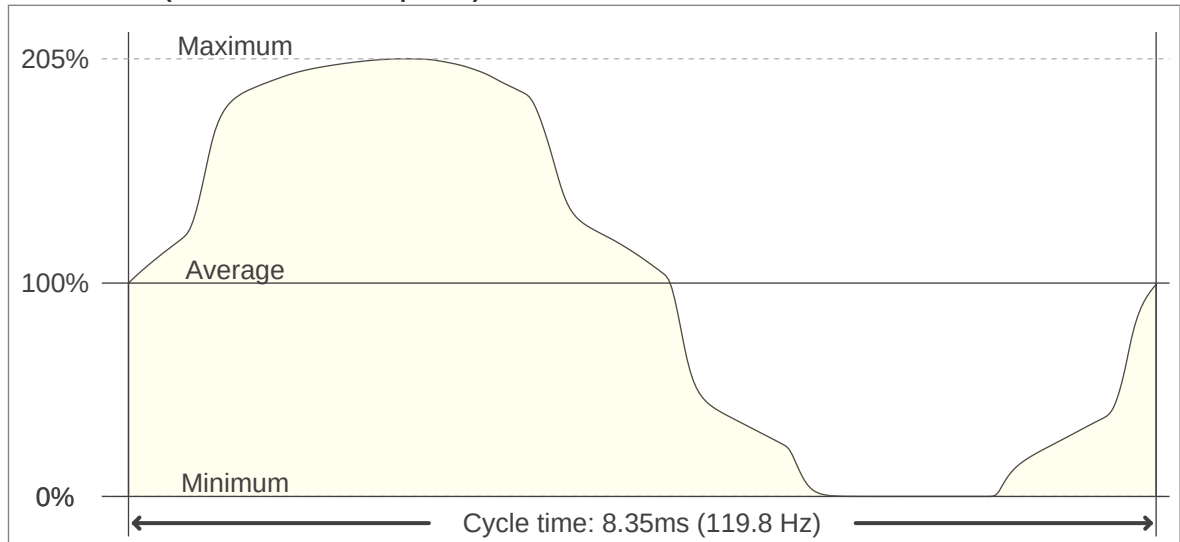

Flicker FFT (frequency scope of flicker curve)

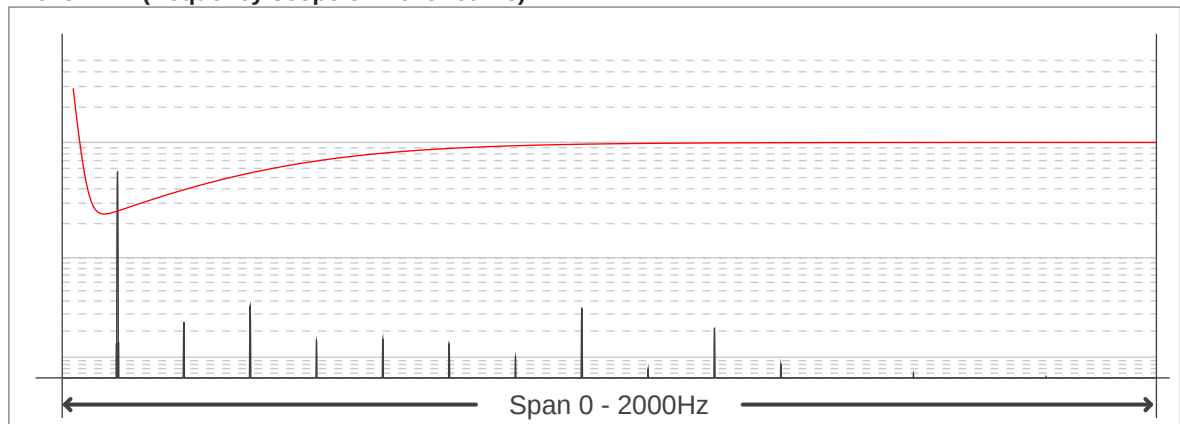

Flicker results:

Flicker frequency:	119.76 Hz
Flicker index:	0.36
Flicker percentage:	100 %
SVM: (Visual flicker)	4.03

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

