




## Eco LED Strip Lights

3528 Strip Specifications

### DIMENSIONAL DRAWINGS


STN-AxK80-B12A-20D5M-24V

- 32.8 ft (10 m) max run

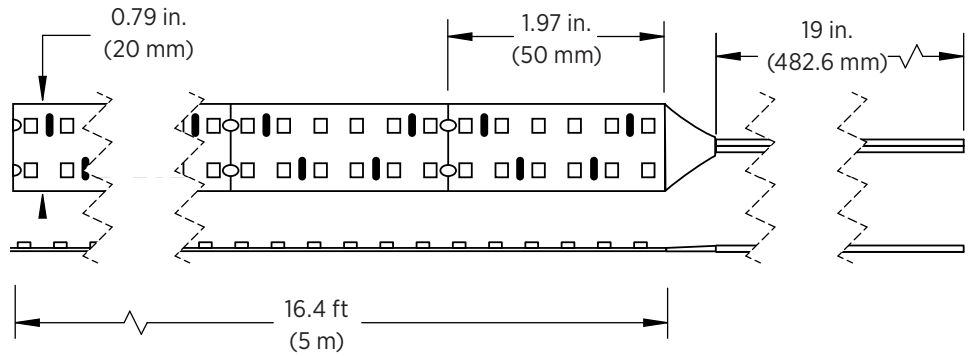



Note: The strip height for all strips shown is 0.08 in. (2 mm).

### STRIP FLEXIBILITY



Bends less than 15mm will damage circuit traces and void warranty.

Bending strips at sharp angles will damage circuit traces and void warranty.



Bending strips on horizontal plane will damage circuit traces and void warranty.

### NOTES



Specifications are subject to change without notice.

T 866.811.5550

F 314.972.6202

email: [commercial-sales@superbrightleds.com](mailto:commercial-sales@superbrightleds.com)

[www.superbrightleds.com/cat/industrial-led-lighting/](http://www.superbrightleds.com/cat/industrial-led-lighting/)

