

Light efficiency:

134 Lumen/Watt

Output: 31798 lm

Light quality:

CRI: 85.2


Peak: 16016 cd

Color temperature:

4986 K

Power: 237.7 W

PF: 1.0

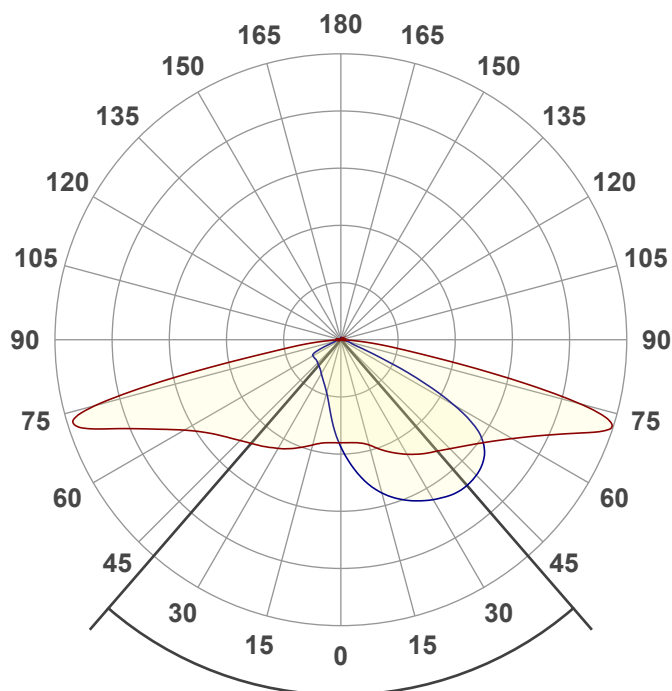

Product name:

PLLD-S150K240-HP

Date and time:

7/14/2022 2:33:53 PM

Beam angle

81.8°




CIE 1931


x: 0.346

y: 0.355

Spectra

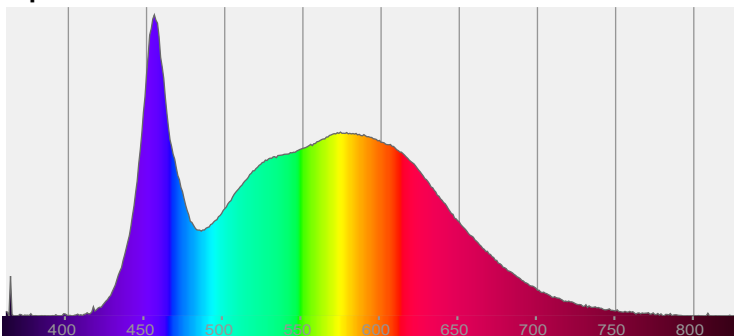

Power

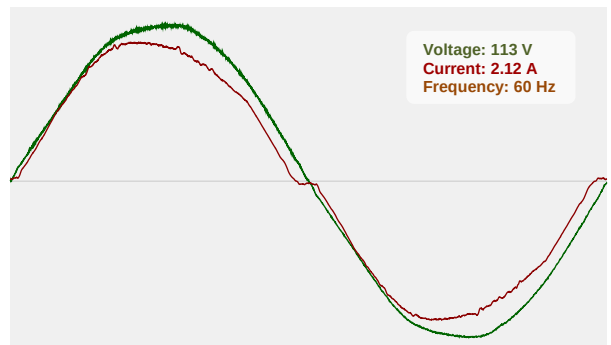



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

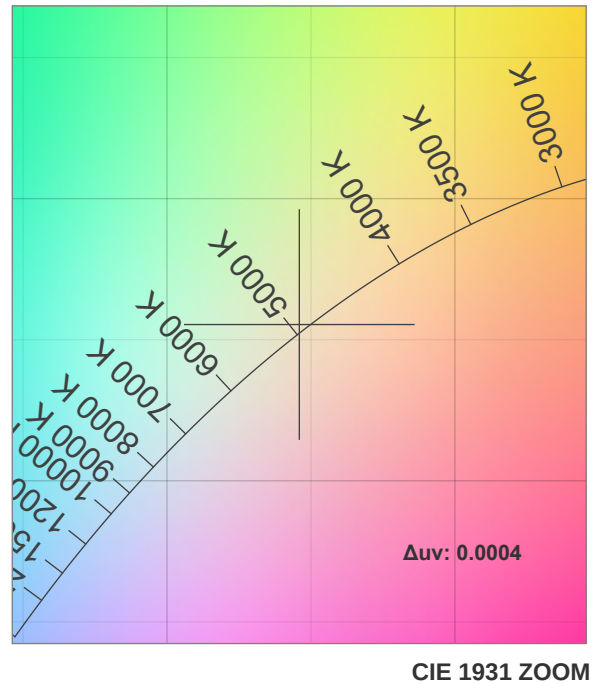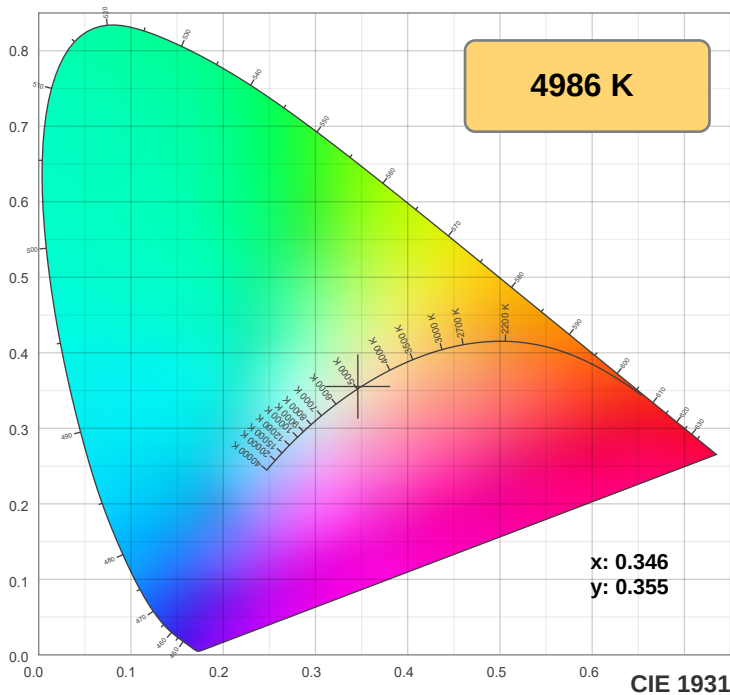

TM30: 84.6

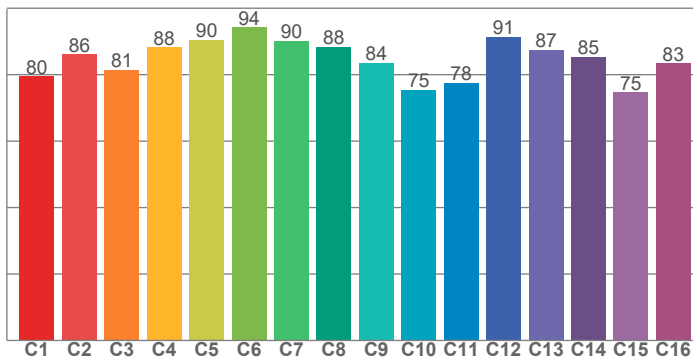

CRI: 85.2 (R1-R8)

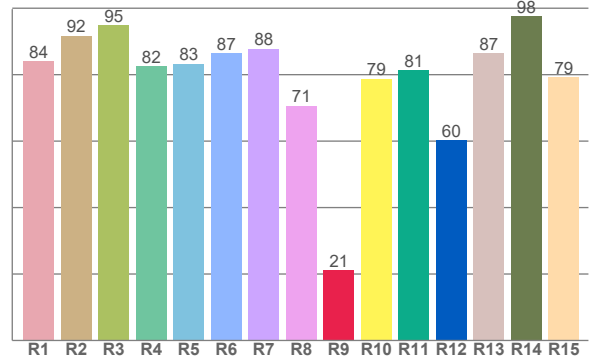

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
84.0	91.7	94.9	82.5	83.3	86.5	87.8	70.6	21.1	78.8	81.2	60.2	86.5	97.6	79.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.5	86.1	81.4	88.2	90.4	94.2	90.3	88.4	83.5	75.3	77.6	91.4	87.4	85.3	74.7	83.4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
82.3	97.3	80.4	73.0	77.6	79.9	85.1	89.8	97.6	90.8	86.5	85.6	85.2	75.9	78.9

CQS: 82.9

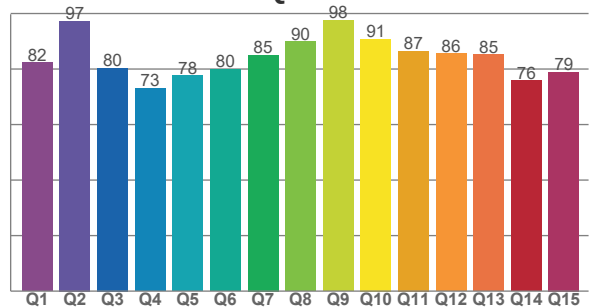

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4986 K	85.2	21.1	84.6	94.9	82.9	0.346	0.355	0.211	0.324	0.0004



TM30 Report







Rf 84.6

Fidelity index Rf

Rg 94.9

Gammut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	80	-11%	1%
2	86	-7%	5%
3	81	-4%	9%
4	88	-1%	5%
5	90	-2%	2%
6	94	-1%	-2%
7	90	-6%	-1%
8	88	-7%	2%
9	84	-7%	10%
10	75	-4%	15%
11	78	3%	13%
12	91	5%	2%
13	87	7%	-7%
14	85	2%	-9%
15	75	2%	-21%
16	83	-6%	-7%

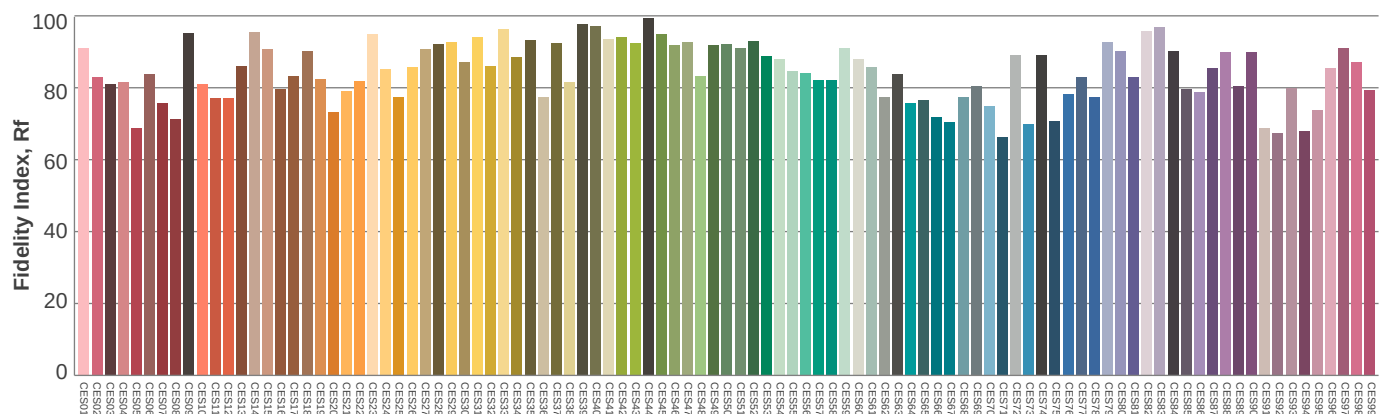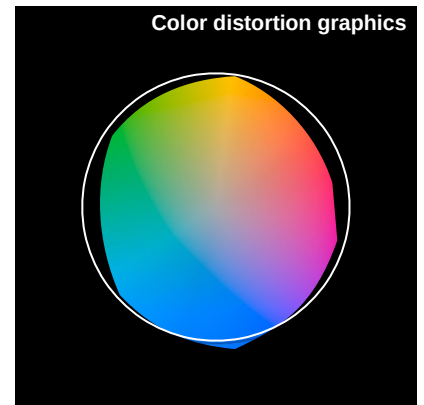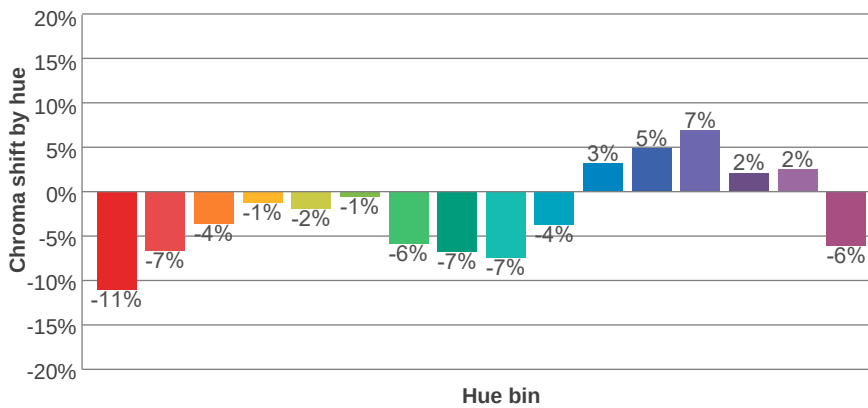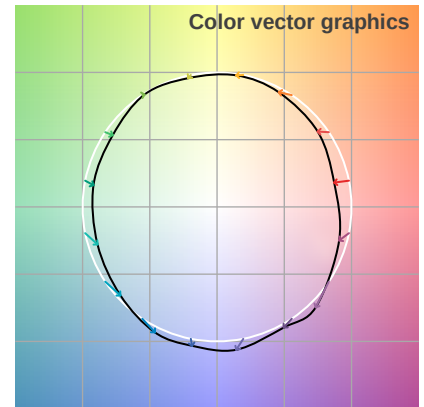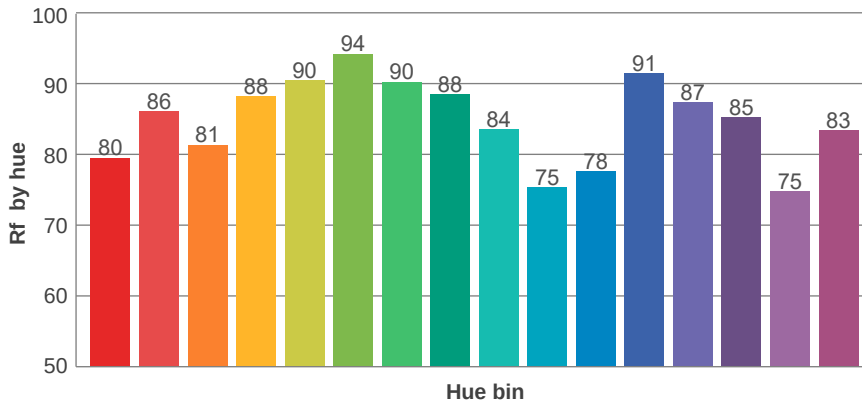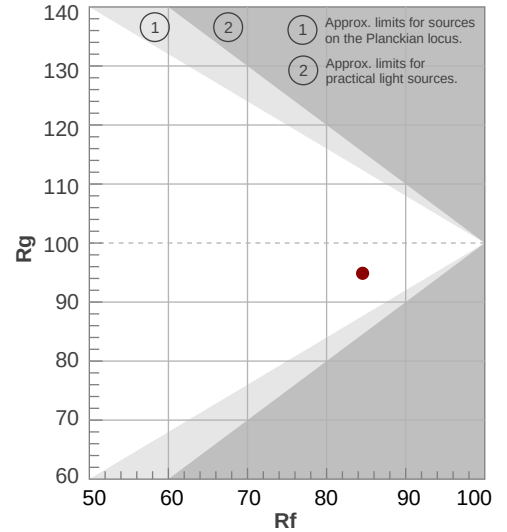

Color Evaluation Sample



Illumination

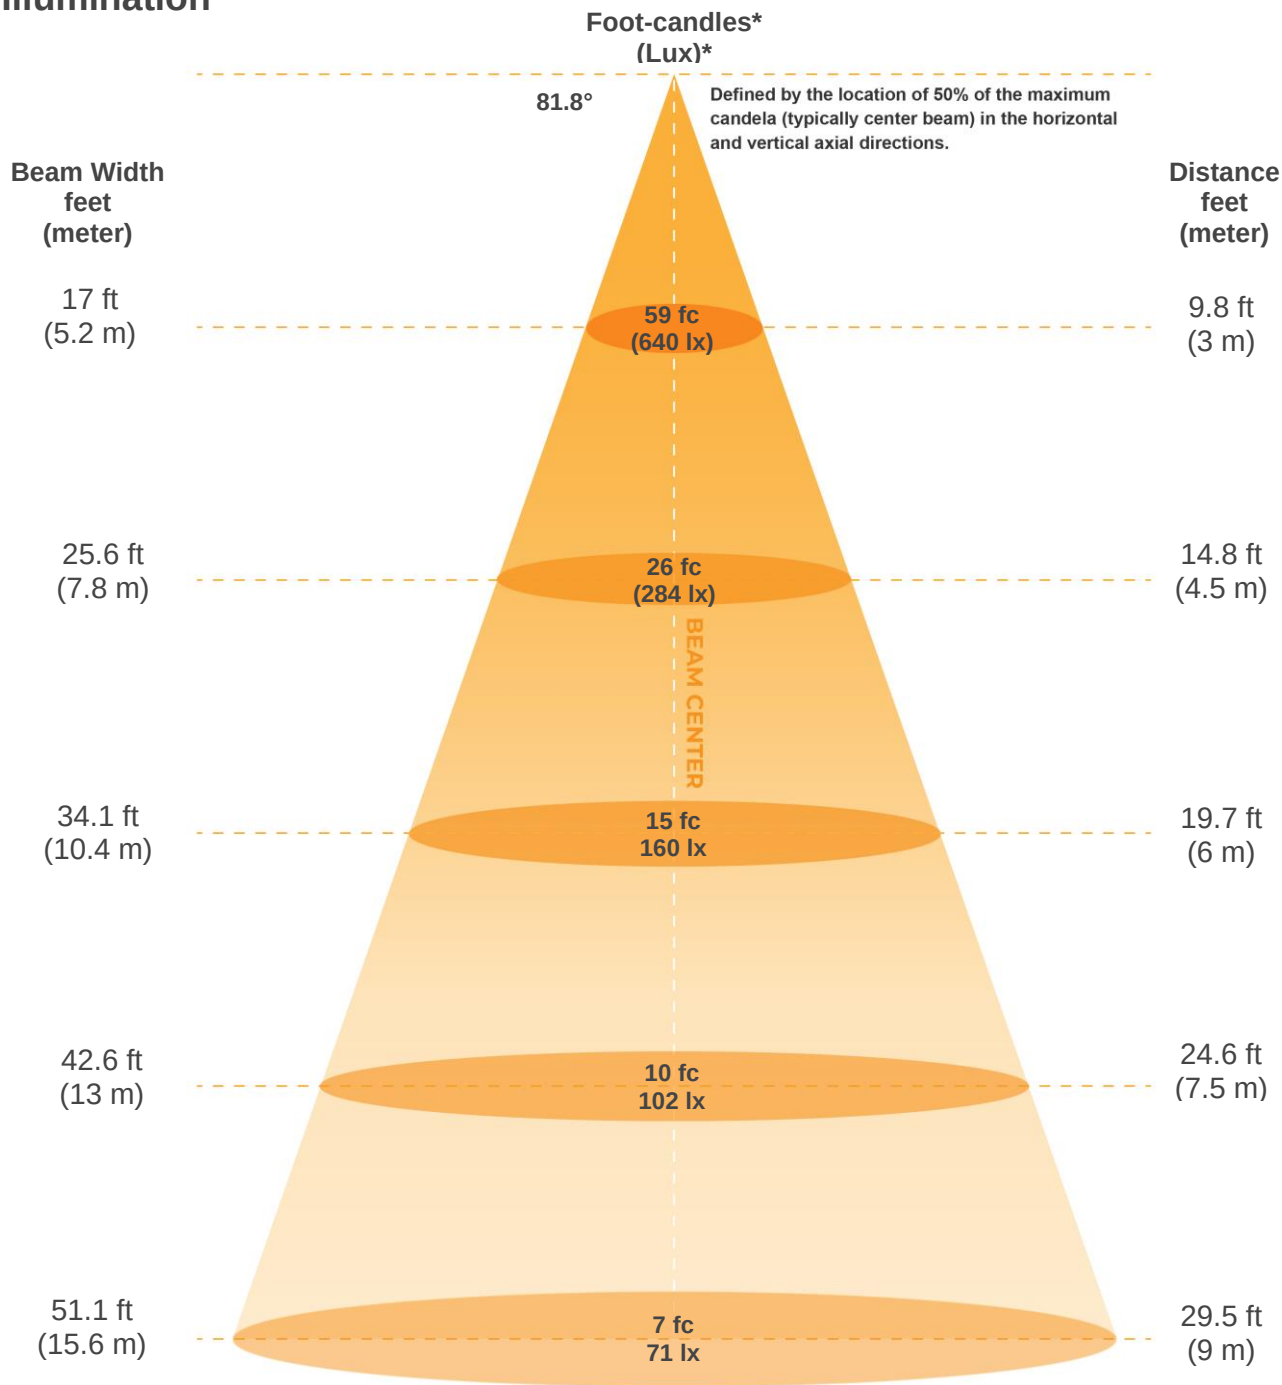

*measured at center of beam

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
5760lx	1440lx	640lx	360lx	230lx	160lx	118lx	90lx	71lx	58lx	48lx	40lx	34lx	29lx	26lx	23lx	20lx	18lx	16lx	14lx
535.2fc	133.8fc	59.5fcd	33.4fcd	21.4fcd	14.9fcd	10.9fcd	8.4fcd	6.6fcd	5.4fcd	4.4fcd	3.7fcd	3.2fcd	2.7fcd	2.4fcd	2.1fcd	1.9fcd	1.7fcd	1.5fcd	1.3fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
81.8°	150.1°	164.1°	66.2%	37.2%



ISO Diagrams

ISO candela diagram

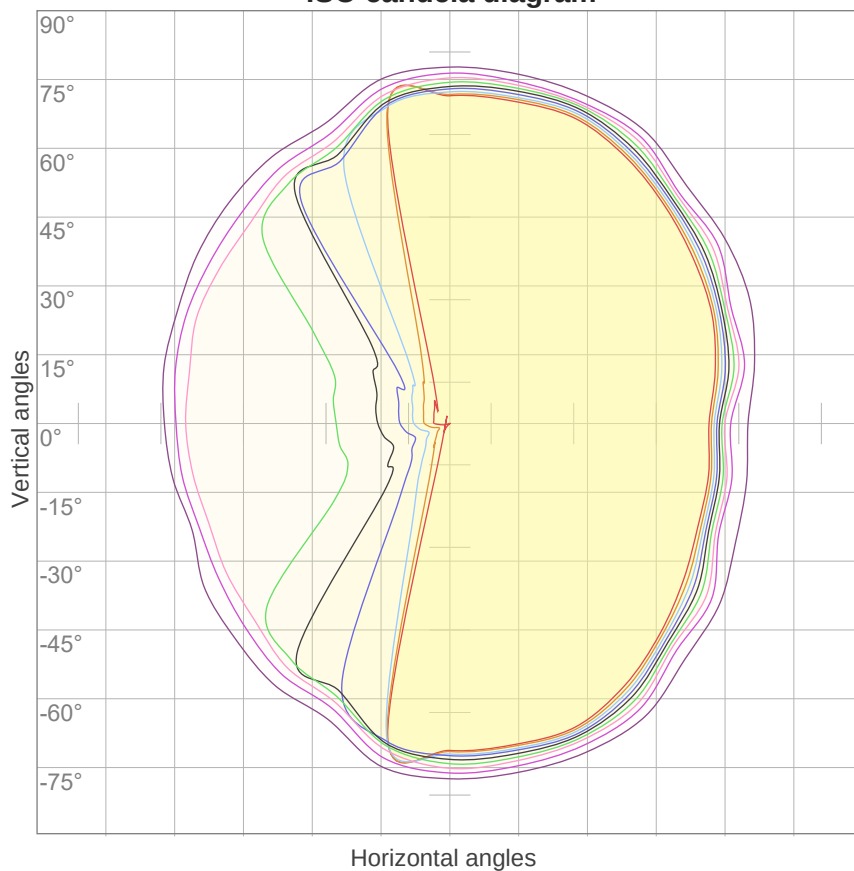


10%	576 cd
20%	1152 cd
30%	1728 cd
40%	2304 cd
50%	2880 cd
60%	3456 cd
70%	4032 cd
80%	4608 cd
90%	5184 cd

Conditions:

Number of c-planes: 16

Candela at center: 5760 cd

ISO lux diagram

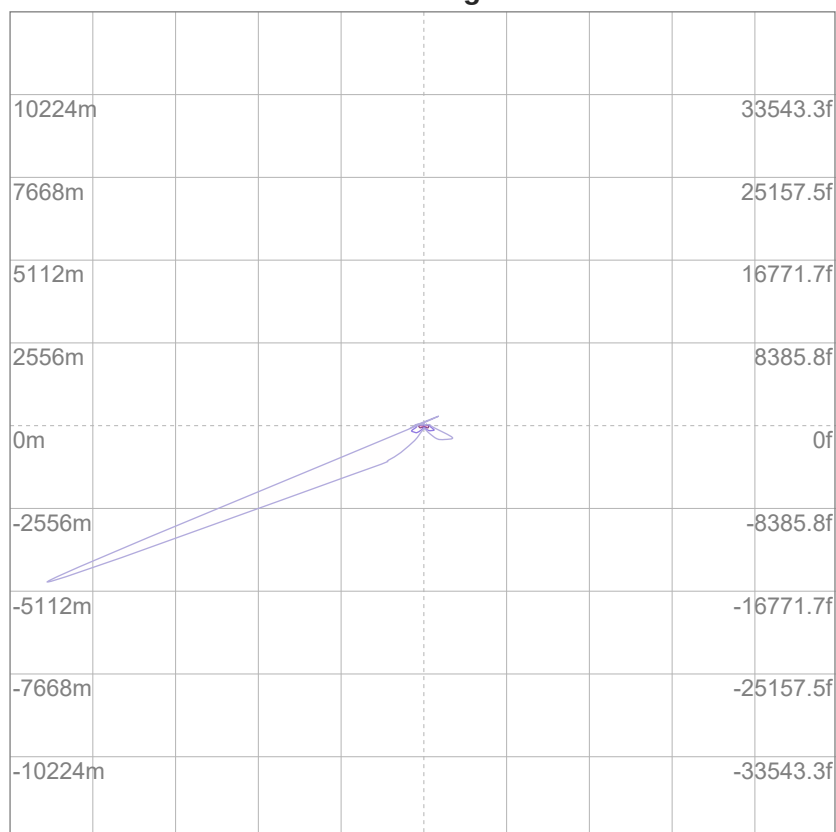

3%	1.73 lx
5%	2.88 lx
10%	5.76 lx
30%	17.3 lx
50%	28.8 lx

Conditions:

Number of c-planes: 16

Lux at center: 57.6 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	99
1	107	101	96	92	104	99	94	90	94	91	87	90	87	84	86	84	82	79
2	95	85	77	71	92	83	76	70	80	73	68	76	71	66	73	69	65	62
3	85	73	63	56	82	71	62	55	68	60	54	65	58	53	62	57	52	50
4	77	63	53	45	74	62	52	45	59	51	44	56	49	43	54	48	43	40
5	70	55	45	37	67	54	44	37	52	43	37	49	42	36	47	41	36	33
6	64	49	39	32	62	48	38	31	46	37	31	44	36	31	42	36	30	28
7	59	44	34	27	57	43	34	27	41	33	27	39	32	26	38	31	26	24
8	54	39	30	24	53	39	30	23	37	29	23	36	28	23	35	28	23	21
9	50	36	27	21	49	35	27	21	34	26	20	33	25	20	32	25	20	18
10	47	33	24	18	46	32	24	18	31	23	18	30	23	18	29	23	18	16

LAMPS (number of lamps)

Luminaire budgetary diagram

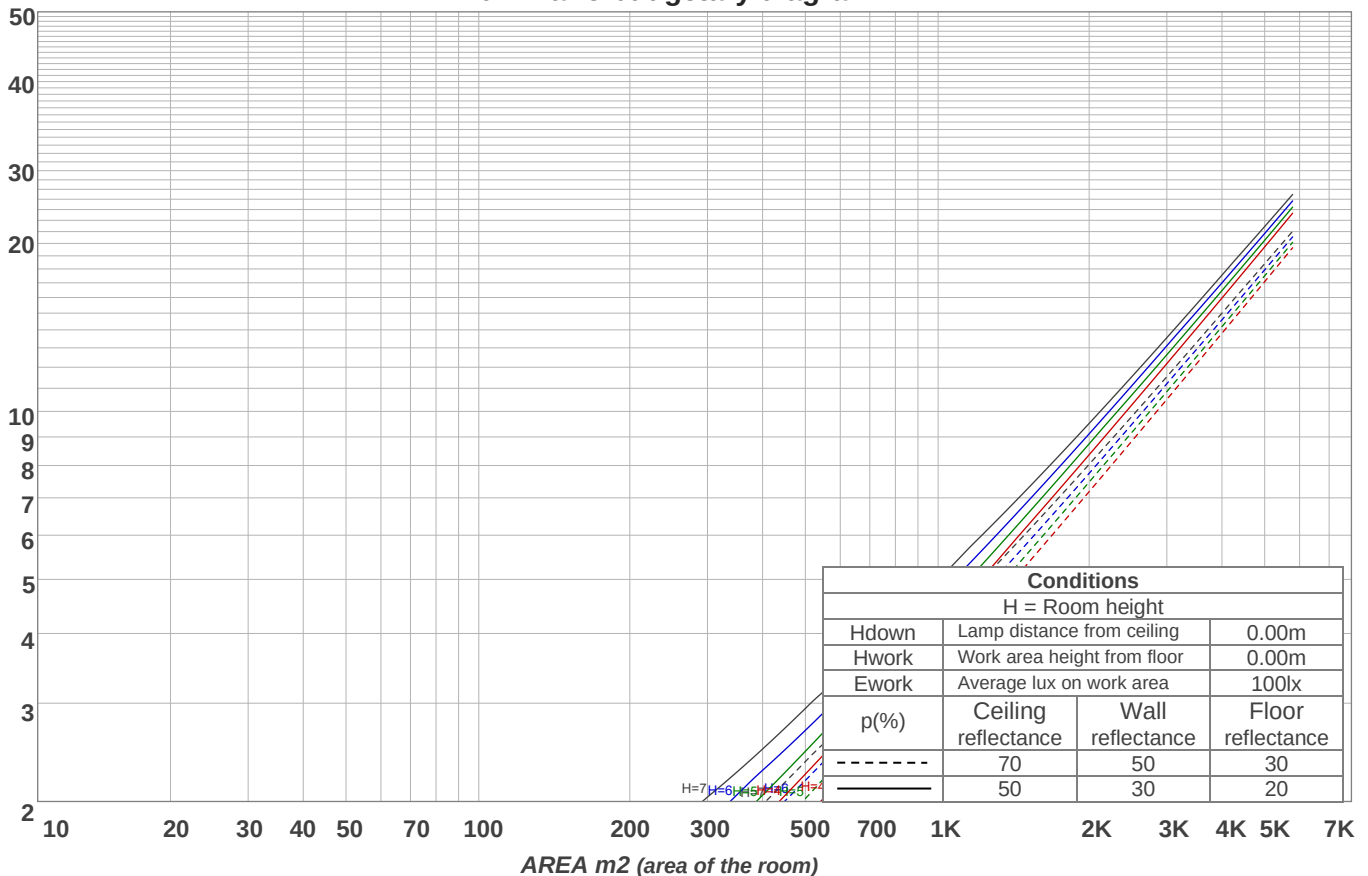

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
549 lm	1678 lm	2900 lm	4154 lm	5374 lm	6395 lm	6251 lm	3803 lm	520 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
27.3 lm	24.4 lm	25.3 lm	25.3 lm	24.1 lm	20.0 lm	15.0 lm	8.97 lm	2.95 lm




Road Report

LCS table


BUG rating:	B4 U3 G4	
Forward light	Lumens	Lumens %
Low(0-30):	2585.3	8.1%
Medium(30-60):	8189.7	25.8%
High(60-80):	5351.2	16.8%
Very high(80-90):	281.7	0.9%
Back light		
Low(0-30):	2544.7	8%
Medium(30-60):	7743.6	24.4%
High(60-80):	4749.4	14.9%
Very high(80-90):	246.7	0.8%
Uplight		
Low(90-100):	27.7	0.1%
High(100-180):	146.2	0.5%

LCS graph

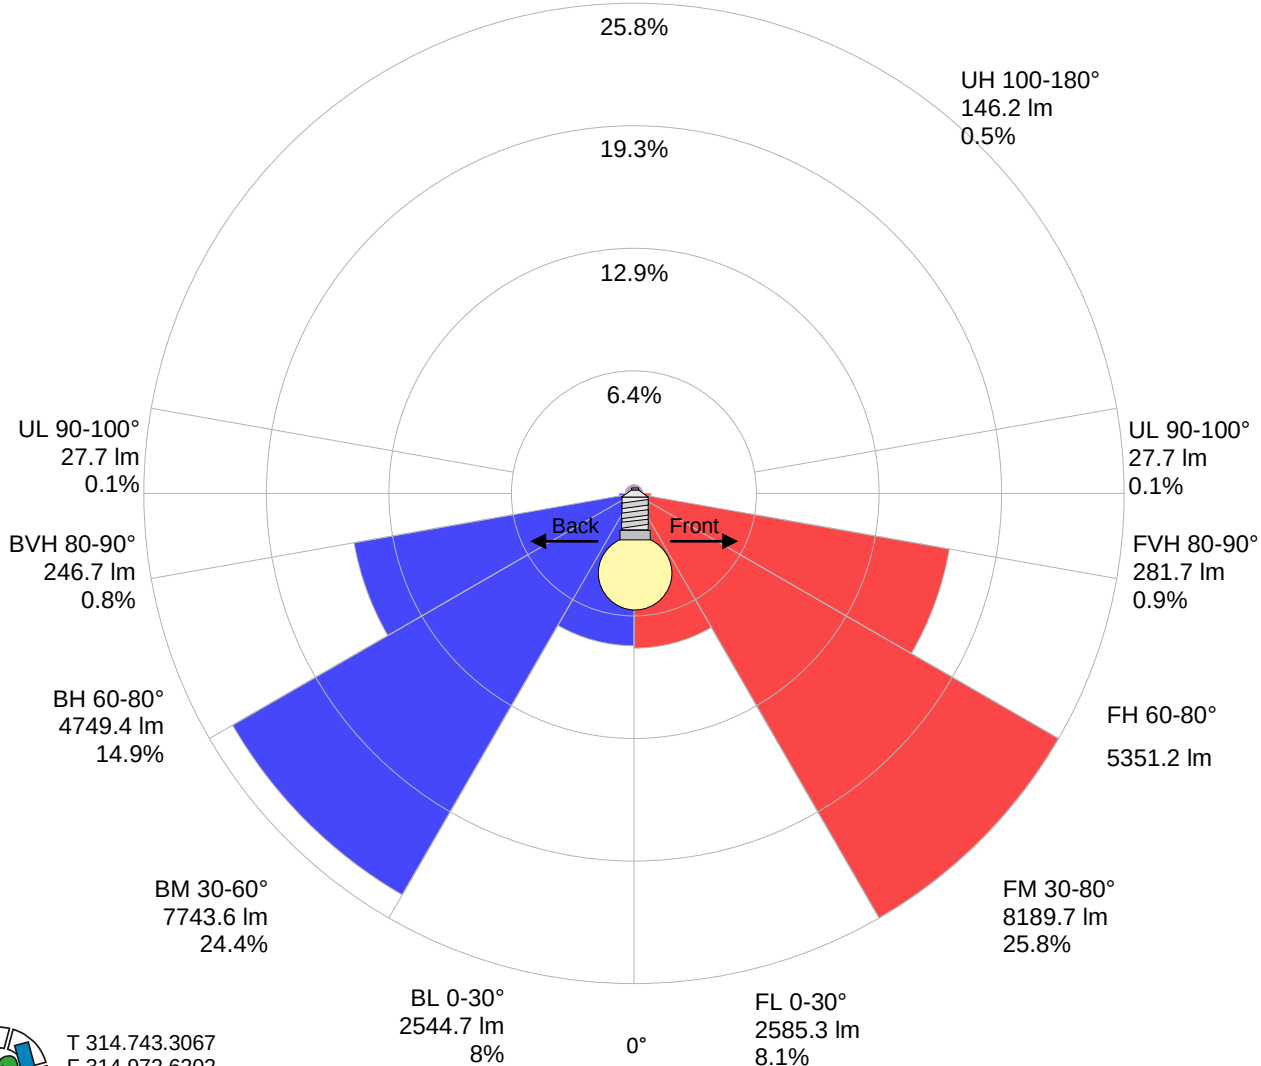

Stabilization

Warmup curve

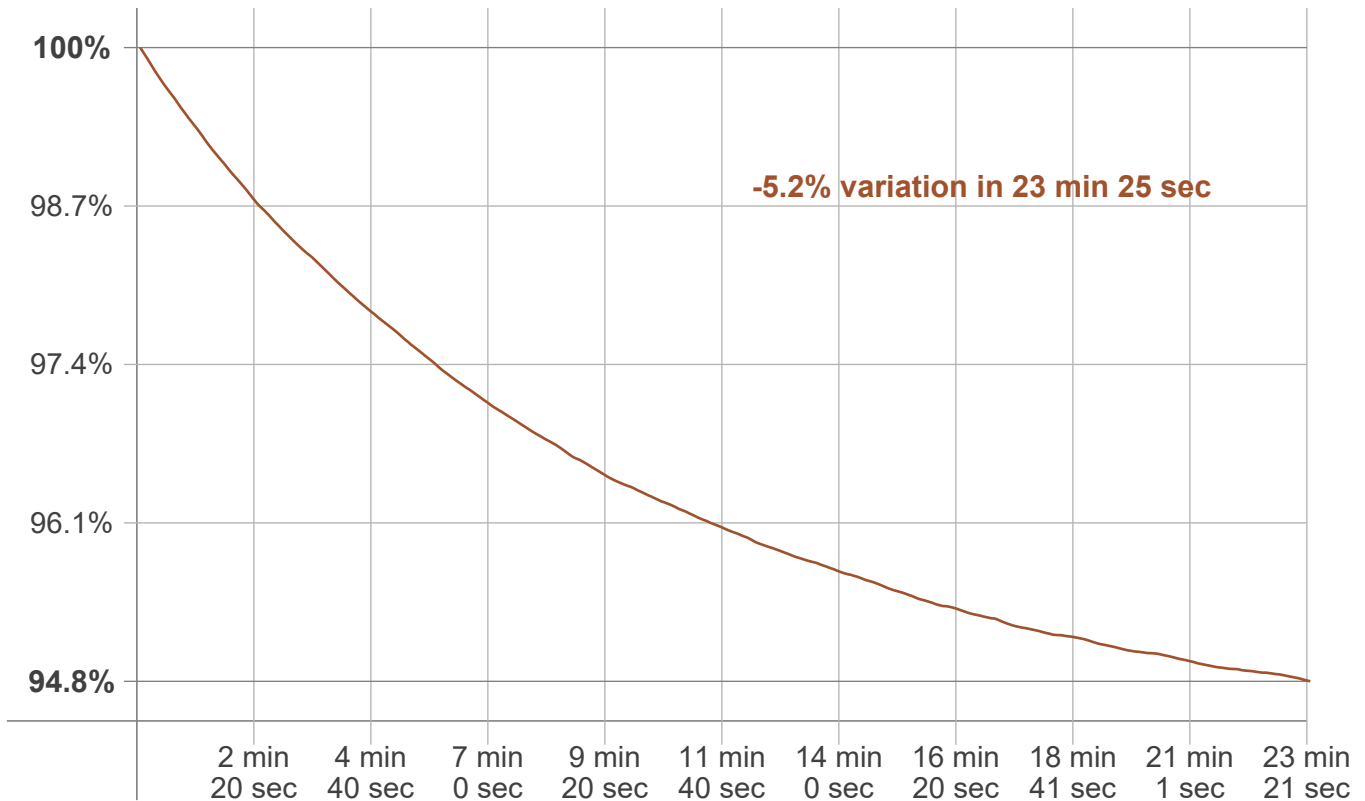

Warmup result

Warmup time:	Lamp stabilized in 23 min 25 sec
Warmup variation	-5.2%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
4889 K	+97 K	4986 K


Output change

Output start	Output change	Output end
33502 lm	-1703 lm	31798 lm




Flicker Specifications


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

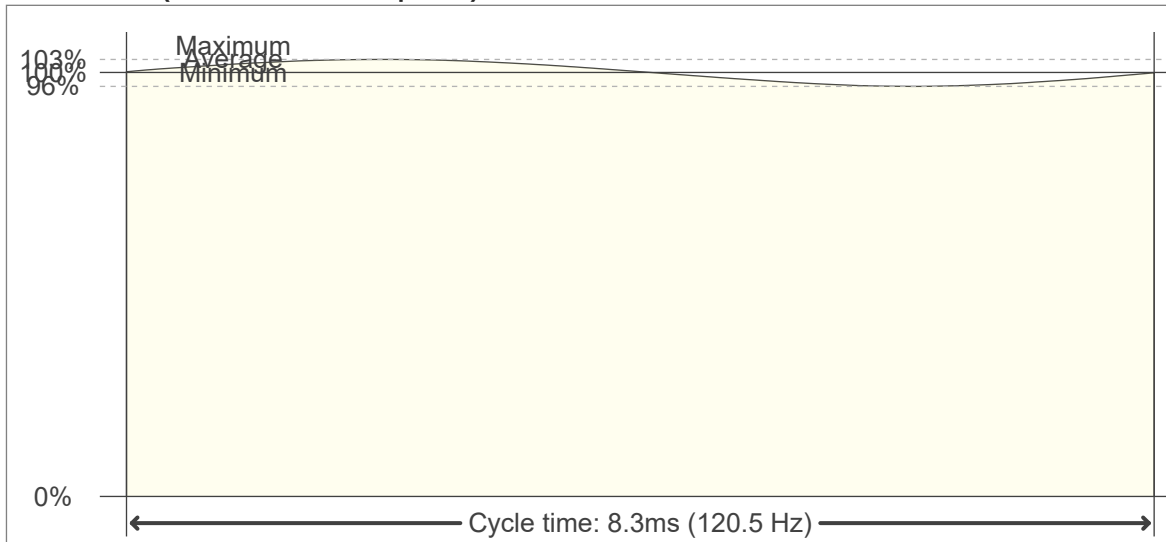

Flicker FFT (frequency scope of flicker curve)

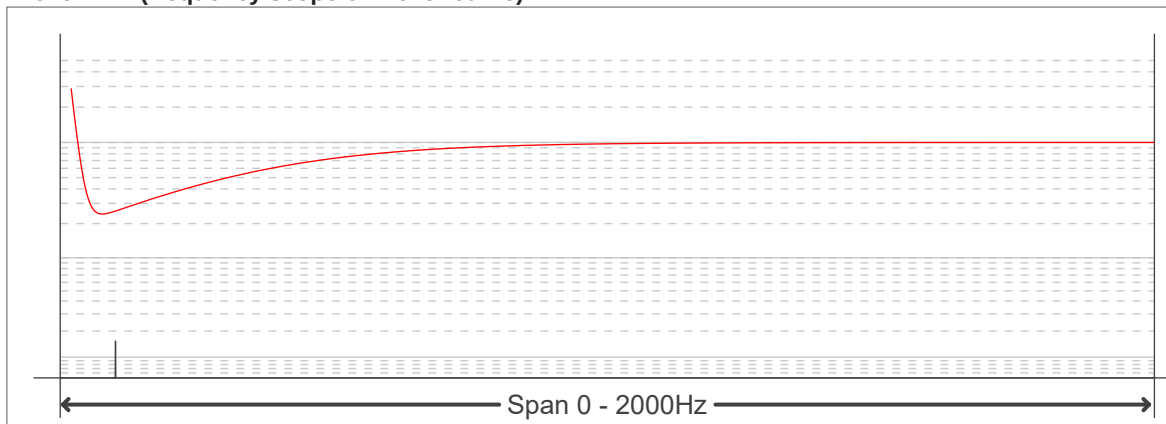

Flicker results:

Flicker frequency:	120.48 Hz
Flicker index:	0.01
Flicker percentage:	3.33 %
SVM: (Visual flicker)	0.11

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------

