

Important: Read all instructions prior to installation.

LED Ready Landscape Spot/Flood Light



Safety and Notes

- For use with OUTDOOR, low-voltage landscape lighting systems ONLY.
- NOT FOR USE with submersible or pool/spa equipment.
- Do not submerge in water, the product can be damaged.
- For low voltage use only. Power supply voltage must match installed bulb.
- LFB-S02 and LFB-S03 is designed for MR16 (GU5.3 base) bulbs only. LFB-F01 is designed for G4 bulbs only. Bulb not included.



Recommended Accessories

Part Number	Description
WWN-2212	silicone filled twist on wire connector
WP14-2DB	14 gauge landscape wire
WP12-2DB	12 gauge landscape wire
LFB-A01SMP	surface mount plate

Installation Instructions

1. Install compatible bulb.
2. Lay fixtures out as they will be installed.
3. Run landscape wire from power supply to each light. Wire must be within 3" of mounting stake to allow power connections to be made.
4. Use waterproof connectors to connect lights to supply wires as well as wires running to additional lights.
5. Using a small shovel, loosen the ground where fixture will be installed. Press stake into ground. Wetting the ground can loosen soil to ease installation if needed.
Note: Do not use a hammer or exert force on the fixture by using it to drive the stake into the ground as this may cause damage.
6. Turn on power supply and ensure all fixtures are working. If one or more individual fixtures are not working, check each connection. It is recommended to wrap all connections in electrical or self-fusing tape.
7. Bury landscape wire, fixture pigtails, and connectors. A depth of 3" is recommended. Wires and connectors can also be covered by mulch or stone.

Assembly

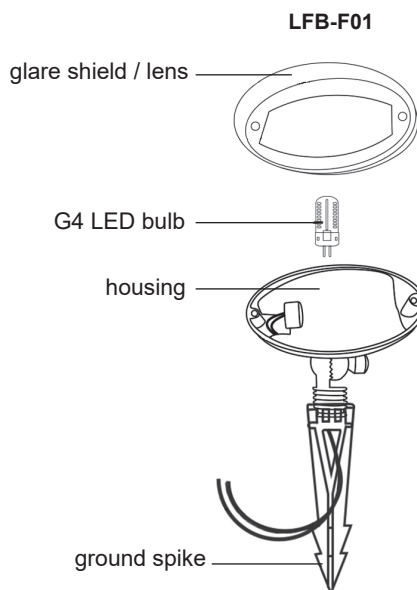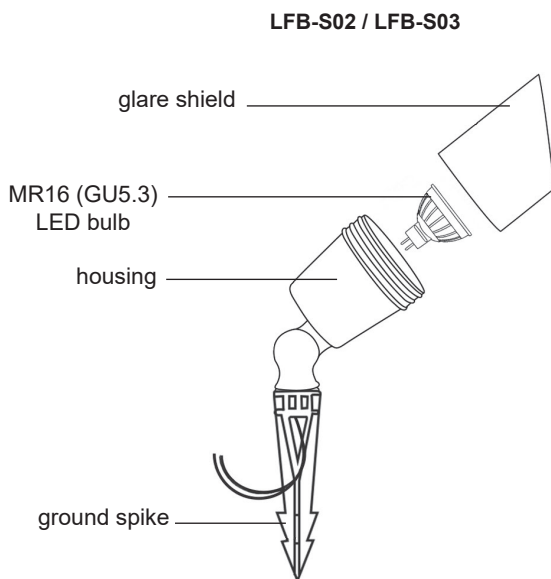

Note: Assemble fixtures as shown. Run power wires through slot in stakes.

