

## WLL Series

LED Wall Light Specifications

Project \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_



WLL41036-xKx



WLL61018-xKx



WLL61036-xKx



### Description

WLL series LED wall lights are durable, architectural lighting solutions for porches, patios, entryways, and more. Available in three styles and in a black or brown finish, these lights can compliment a variety of exteriors. Each style has a unique downward shade that distributes a wide beam of light while reducing unnecessary uplight. Integrated LEDs offer better energy efficiency and no need to replace bulbs.

### Mechanical

- Decorative style provides architectural accent
- Classic style compliments architectural exteriors
- Black or brown coated steel housing and polycarbonate lens
- Wall mounts to standard junction box
- Operating temperature of -4°-104° F (-20°-40° C)
- IP65 rated for wet conditions

### Electrical

- 120 VAC input
- TRIAC dimmable with optional dimmer
- 18 AWG pigtail connection

### Photometrics

- 120° beam angle
- 80+ CRI

### Warranty

Five (5) Year Warranty.

### Available Models<sup>1</sup>

#### Gooseneck Barn Light

- WLL41036-3KBK
- WLL41036-3KBN
- WLL41036-4KBK
- WLL41036-4KBN

#### Decorative Sconce

- WLL61018-3KBK
- WLL61018-3KBN
- WLL61018-4KBK
- WLL61018-4KBN

#### Lantern Sconce

- WLL61036-3KBK
- WLL61036-3KBN
- WLL61036-4KBK
- WLL61036-4KBN

### Part Number Breakdown

Example: WLL61036-3KBN

Family	Style	Color Temperature	Finish
WLL	41036 [3000K]	30K [3000K] or 40K [4000K]	BK [black]
	61018 [3000K]		or BN [brown]
	61036 [3000K]		

### Certifications and Compliances

These lights are ETL Listed in compliance with UL 1598 (IFAM).



### Application

Easily replaces inefficient fluorescent and incandescent lights found in and around barns, driveways and pathways, doorways, entryways, garages, patios, porches, storefronts, and similar areas.

### Notes



T 866.811.5550  
 F 314.972.6202  
 email: commercial-sales@superbrightleds.com  
 www.superbrightleds.com/cat/residential-outdoor-light-fixtures/

<sup>1</sup>Contact customer service if interested in options other than those listed.

Rev V2 Date: 4/07/2021

Specifications are subject to change without notice.

Printed in the U.S.A.

# WLL Series


## LED Wall Light Specifications

### Specifications

Model	WLL41036-xKx	WLL61018-xKx	WLL61036-xKx
Intensity	700 lm	525 lm	525 lm
Operating Voltage	120 VAC		
Power Consumption	12 W	9 W	9 W
Current Draw	100 mA	75 mA	75 mA
Efficacy	58 lm/W	58 lm/W	58 lm/W
Color Temperature	3000K or 4000K (as ordered)		
Beam Angle	120°		
CRI	80+		
Dimmable	no		
IP Rating	IP65		
Ambient Operating Temperature	-4°-104° F (-20°-40° C)		
Product Weight	2.6 lb (1.17 kg)	1.25 lb (567 g)	1.6 lb (726 g)
Rated Life (L70)	50,000 hours		

### Dimensional Drawing

#### WLL41036-xKx

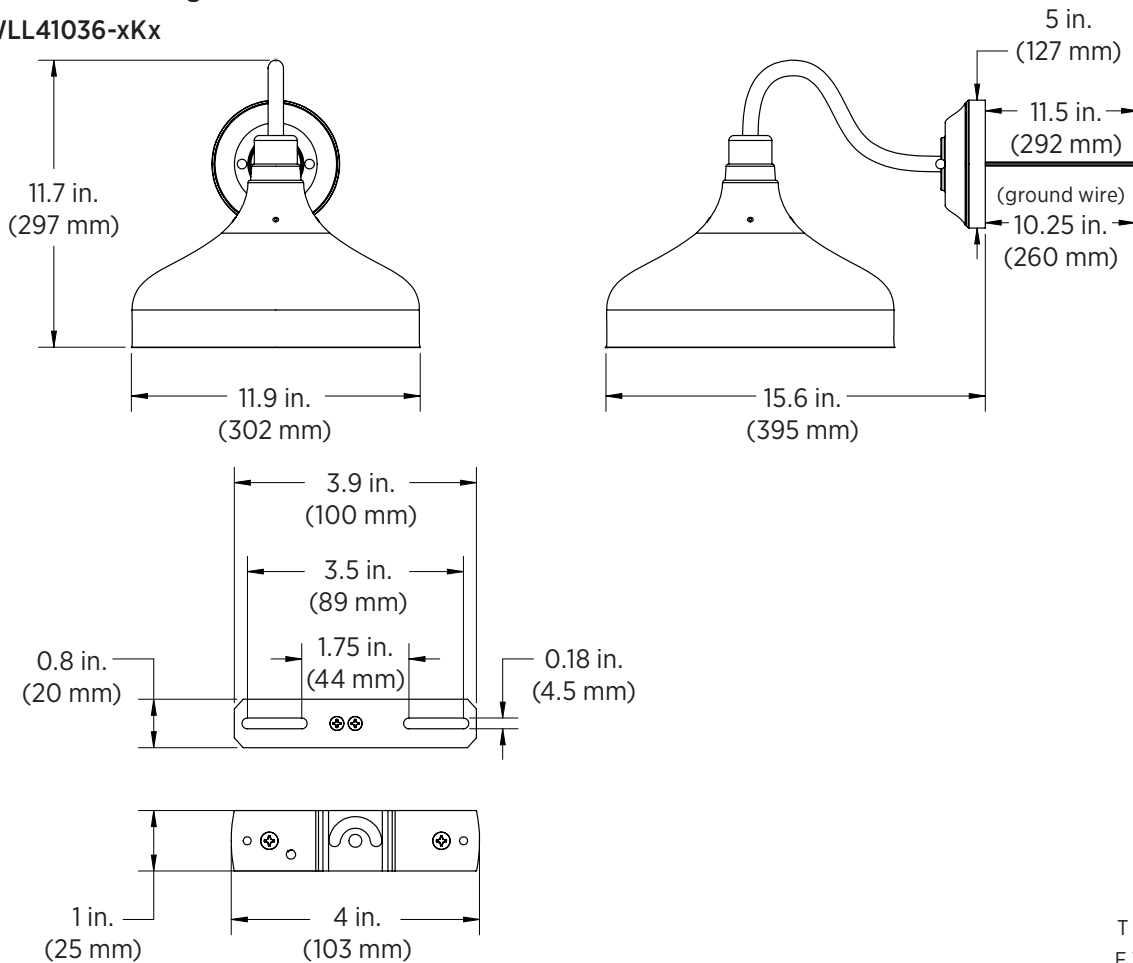


**WPR2 and WPRCCT Series**

Rotatable LED Wall Pack Specifications

**Dimensional Drawing (continued)**

**WLL61018-xKx**

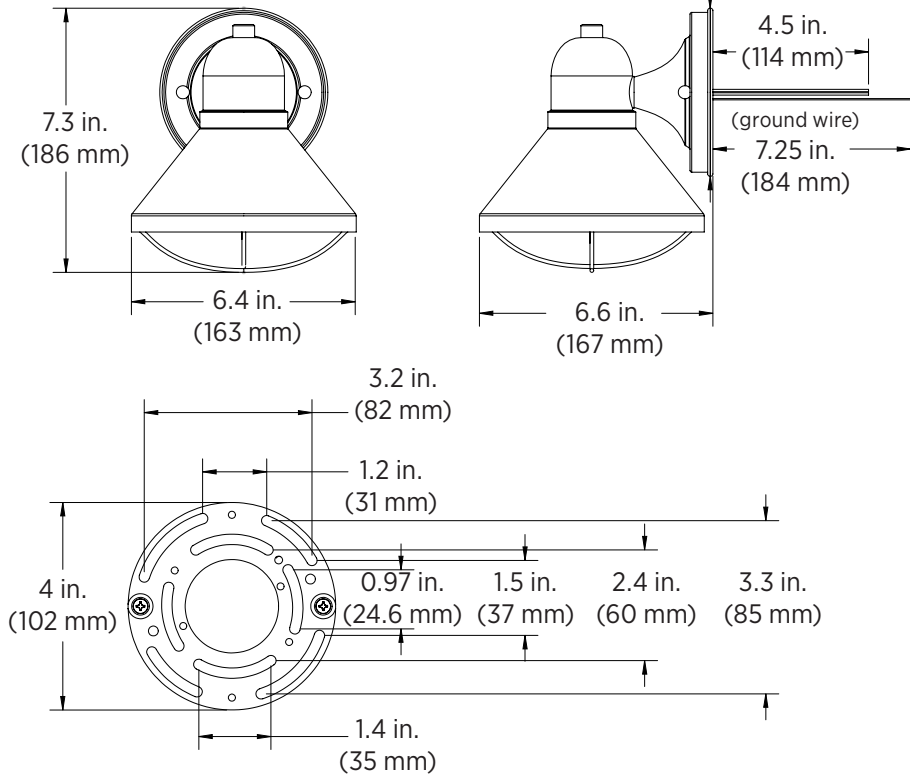

**WLL61036-xKx**

