WLL Series

LED Wall Light Specifications

Project_____

Date_____Type_____

WLL41036-xKx

WLL61018-xKx

WLL61036-xKx



Description

WLL series LED wall lights are durable, architectural lighting solutions for porches, patios, entryways, and more. Available in three styles and in a black or brown finish, these lights can compliment a variety of exteriors. each style has a unique downward shade that distributes a wide beam of light while reducing unnecessary uplight. Integrated LEDs offer better energy efficiency and no need to replace bulbs.

Mechanical

- Decorative style provides architectural accent
- Classic style compliments architectural exteriors
- Black or brown coated steel housing and polycarbonate lens
- Wall mounts to standard junction box
- Operating temperature of -4°–104° F (-20°–40° C)
- IP65 rated for wet conditions

Electrical

- 120 VAC input
- TRIAC dimmable with optional dimmer
- 18 AWG pigtail connection

Photometrics

- 120° beam angle
- 80+ CRI

Warranty

Five (5) Year Warranty.

Available Models[1]

Gooseneck Barn Light	Decorative Sconce	Lantern Sconce
☐ WLL41036-3KBK	☐ WLL61018-3KBK	☐ WLL61036-3KBK
☐ WLL41036-3KBN	☐ WLL61018-3KBN	☐ WLL61036-3KBN
☐ WLL41036-4KBK	☐ WLL61018-4KBK	☐ WLL61036-4KBK
☐ WLL41036-4KBN	☐ WLL61018-4KBN	☐ WLL61036-4KBN

Part Number Breakdown

Example: WLL61036-3KBN

Family	Style	Color Temperature	Finish
WLL	**41036** [3000K]	**30K** [3000K] or **40K** [4000K]	**BK** [black] or **BN** [brown]
	61018 [3000K]		
	61036 [3000K]		

Certifications and Compliances

These lights are ETL Listed in compliance with UL 1598 (IFAM).

Application

Easily replaces inefficient fluorescent and incandescent lights found in and around barns, driveways and pathways, doorways, entryways, garages, patios, porches, storefronts, and similar areas.

Notes

T 866.811.5550
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/cat/residential-outdoor-light-fixtures/

[1]Contact customer service if interested in options other than those listed.

Rev V2 Date: 4/07/2021

Specifications are subject to change without notice.
Printed in the U.S.A.

WLL Series

LED Wall Light Specifications

Specifications

Model	WLL41036-xKx	WLL61018-xKx	WLL61036-xKx
Intensity	700 lm	525 lm	525 lm
Operating Voltage	120 VAC		
Power Consumption	12 W	9 W	9 W
Current Draw	100 mA	75 mA	75 mA
Efficacy	58 lm/W	58 lm/W	58 lm/W
Color Temperature	3000K or 4000K (as ordered)		
Beam Angle	120°		
CRI	80+		
Dimming Type	TRIAC		
IP Rating	IP65		
Ambient Operating Temperature	-4°–104° F(-20°–40° C)		
Product Weight	2.6 lb (1.17 kg)	1.25 lb (567 g)	1.6 lb (726 g)
Rated Life (L70)	50,000 hours		

Dimensional Drawing

WLL41036-xKx

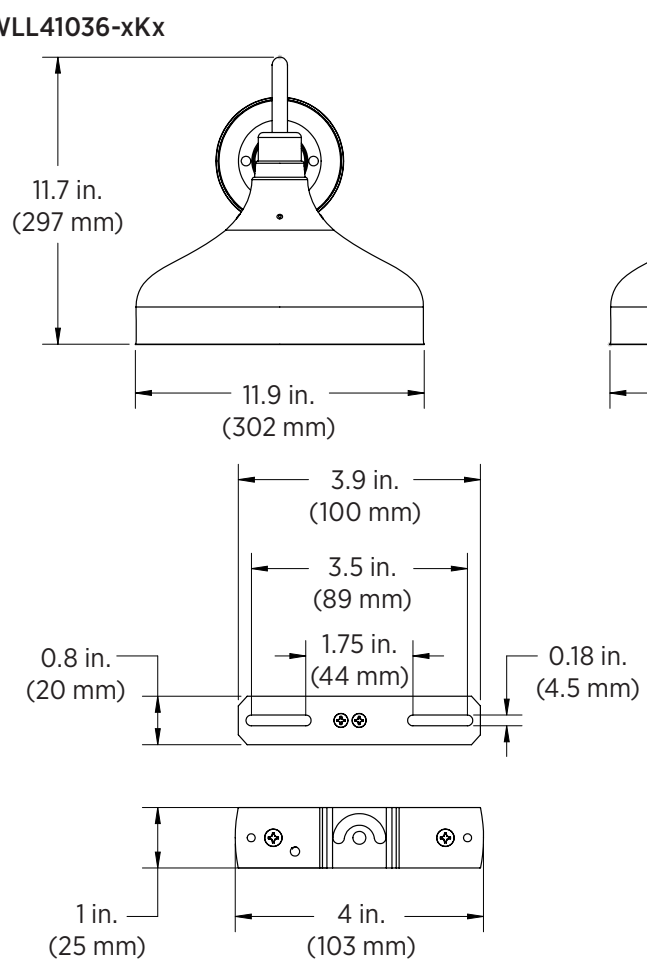

T 866.811.5550
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/cat/residential-outdoor-light-fixtures/

Specifications are subject to change without notice.

WPR2 and WPRCCT Series

Rotatable LED Wall Pack Specifications

Dimensional Drawing (continued)

WLL61018-xKx

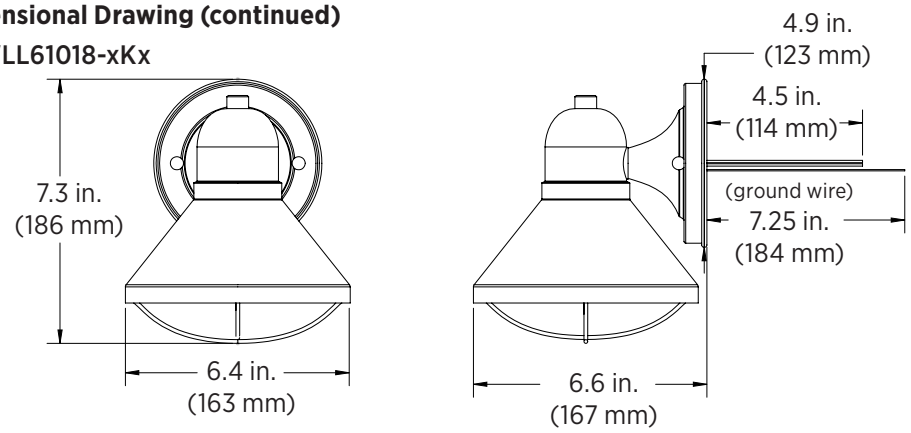

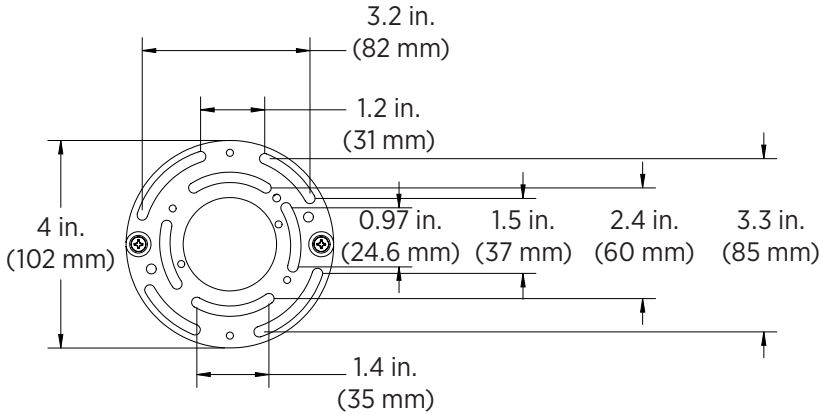

WLL61036-xKx

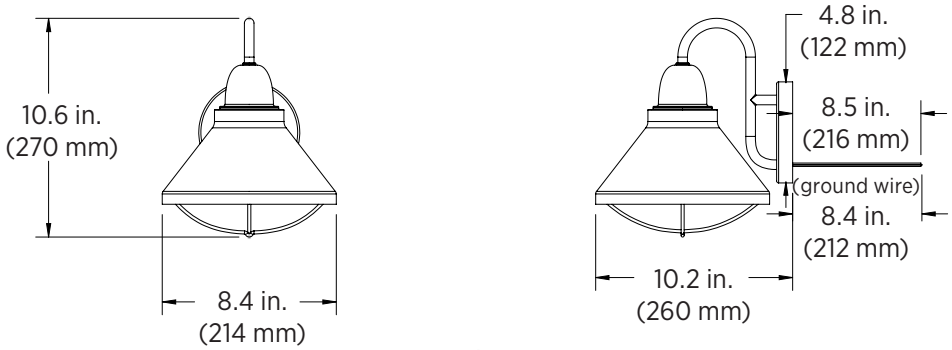

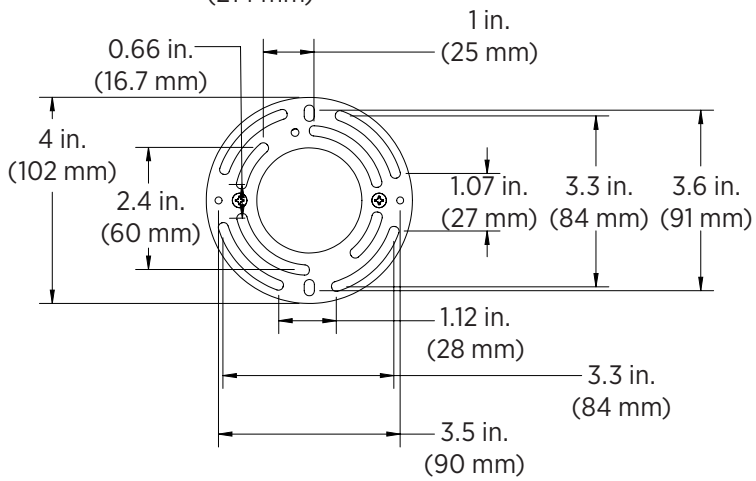

T 866.811.5550
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/cat/residential-outdoor-light-fixtures/

Specifications are subject to change without notice.