

WSR / WSS Series

Up / Down LED Wall Sconce Specifications

Project _____

Date _____ Type _____



WSR-30K20-UDBL



WSS-30K20-UDBR



Available Models¹

round

- WSR-30K20-UDBL
- WSR-30K20-UDBR

square

- WSS-30K20-UDBL
- WSS-30K20-UDBR

Part Number Breakdown

Example: WSR-30K20-UDBL

Family	Color Temperature	Wattage	Light Type	Finish
WSR (round)	30K [3000K]	20 [20 W]	UD [up / down]	BL [black]
WSS (square)				BR [bronze]

Description

WS series wall sconces have COB LEDs on both ends (top and bottom) to create a dramatic lighting effect. The low-profile, contemporary design easily surface mounts to interior or exterior walls. Aluminum housing and glass lenses are well suited for outdoor applications. Energy efficient LEDs have a wide beam angle making these ideal as an attractive accent or wall wash light.

Mechanical

- Black or bronze powder-coated aluminum housing and glass lens
- Operating temperature of -22°-104° F (-30°-40° C)
- Suitable for installation in wet locations

Electrical

- 120 VAC input
- 50,000 hour rated LED lifespan
- Power factor ≥0.9

Photometrics

- Dual (up and down) 120° beam angle
- 3000K CCT
- 80+ CRI

Application

Easily replace inefficient halogen fixtures such as those found on building facades and exteriors, wall wash applications, and other types of commercial and residential spaces.

Warranty

Five (5) Year Warranty

Certifications and Compliances

These lights are ETL Listed in compliance with UL 1598 (IFAM).



Specifications

Model	WSR-30K20-UDx / WSS-30K20-UDx	
Intensity	1,400 lm	
Operating Voltage	120 VAC	
Power Consumption	20 W	
Current Draw	167 mA @ 120 VAC	
Efficacy	70 lm/W	
Color Temperature	3000K	
Beam Angle	120° (x2, one up and one down)	
CRI	80+	
Dimming	none	
Environmental Rating	suitable for wet locations	
Ambient Operating Temperature	-22°-104° F (-30°-40° C)	
Product Weight	2 lb 6.4 oz (1.08 kg)	3 lb 4 oz (1.47 kg)
Rated Life (L70)	50,000 hours	

¹Contact customer service if interested in options other than those listed.



T 866.811.5550

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/cat/outdoor-led-wall-lights-for-residential-applications/

Rev V1 Date: 12/16/2021

Specifications are subject to change without notice.





Printed in the U.S.A.

WSR / WSS Series





Up / Down LED Wall Sconce Specifications

Specifications

WSR-30K20-UDx

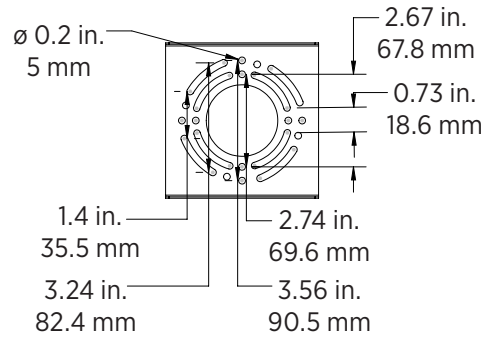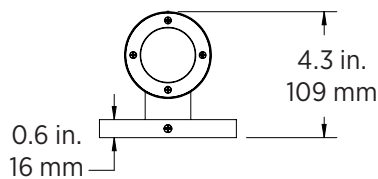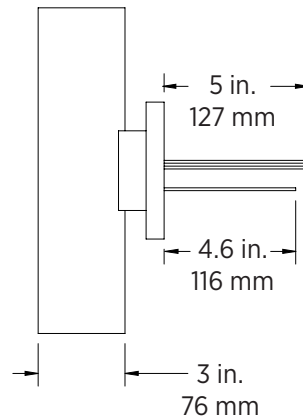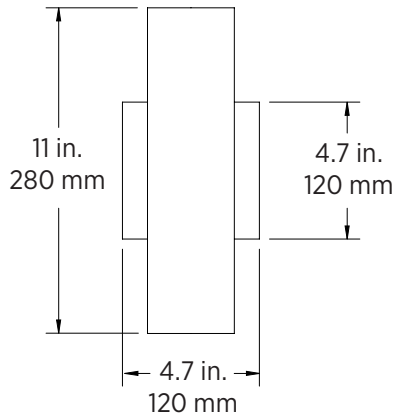

WSS-30K20-UDx

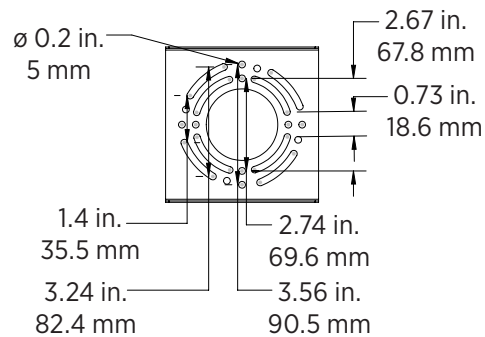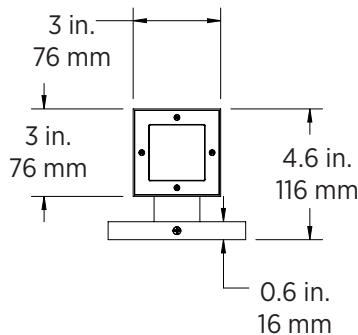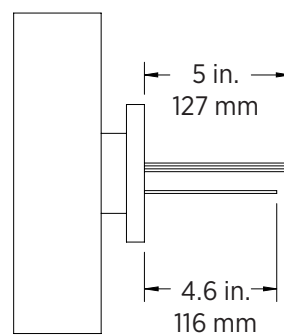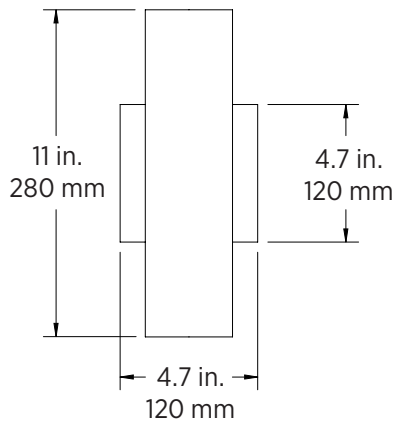

T 866.811.5550

F 314.972.6202

email: commercial-sales@superbrightleds.com

