

Light efficiency:

127 Lumen/Watt

Output: 12826 lm

Light quality:

CRI: 84.6


Peak: 4954 cd

Color temperature:

5045 K

Power: 101.1 W

PF: 1.0

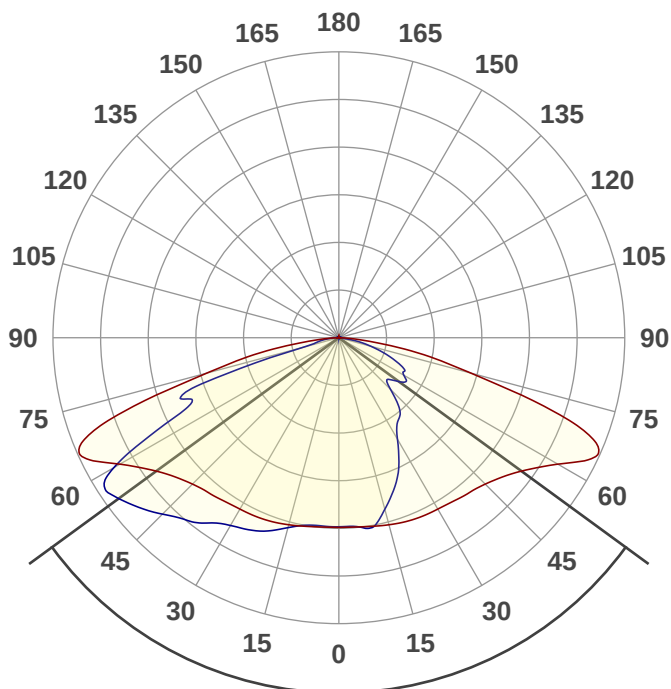

Product name:

ALD-50K10W-C-BRC3 Type IV-M

Date and time:

4/5/2019 2:01:08 PM

Beam angle

107.7°




CIE 1931


x: 0.345

y: 0.357

Spectra

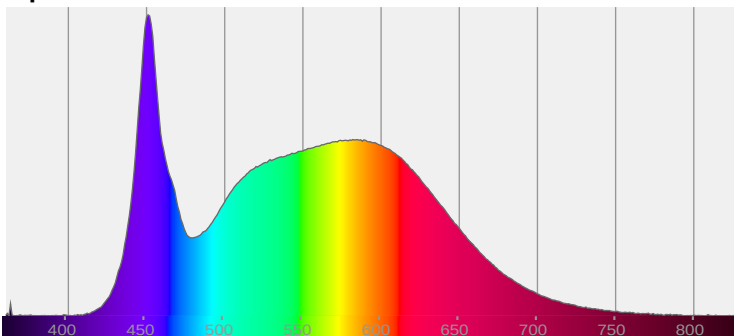

Power

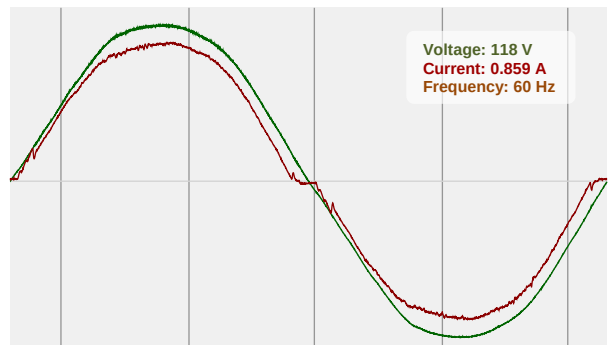



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

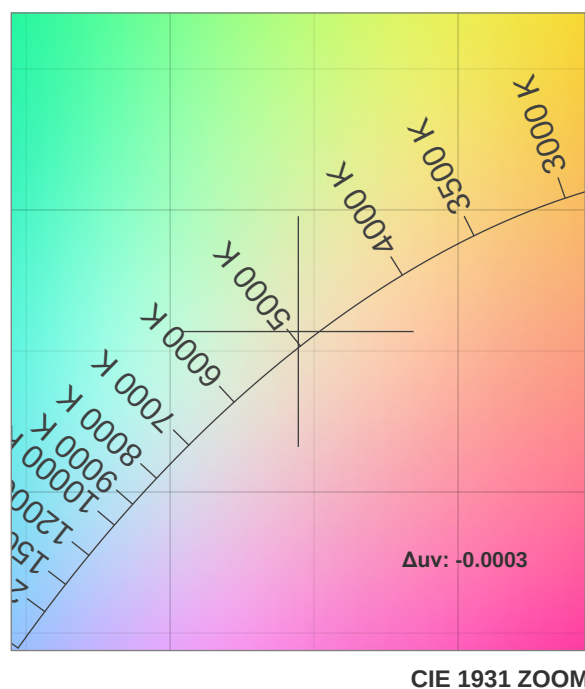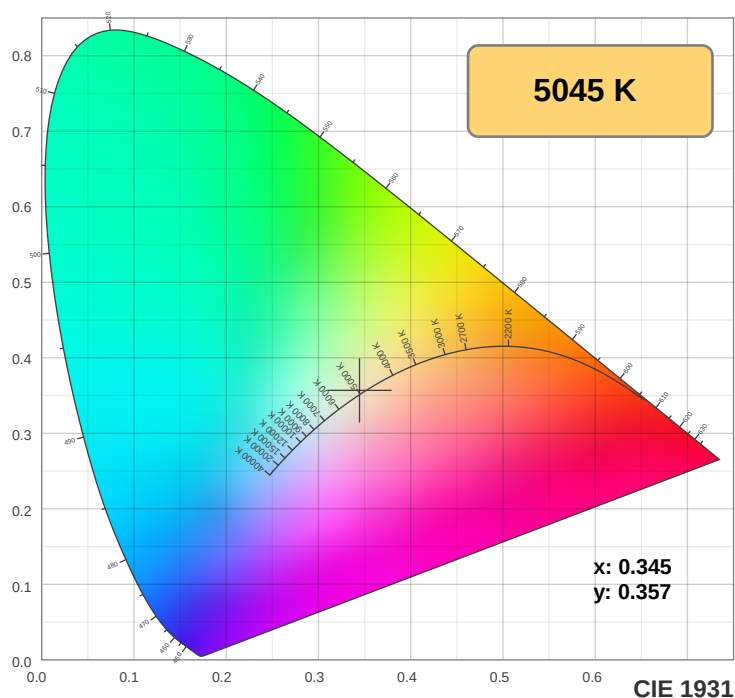

TM30: 82.8

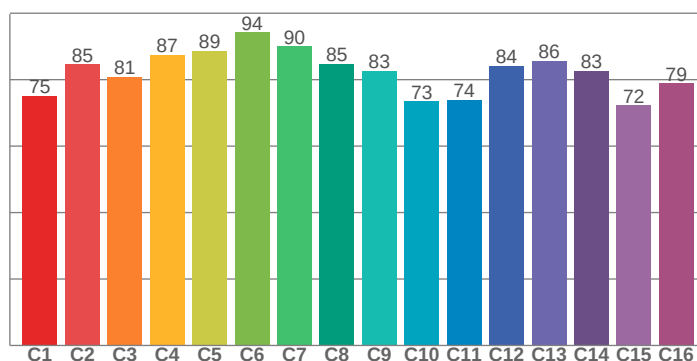

CRI: 84.6 (R1-R8)

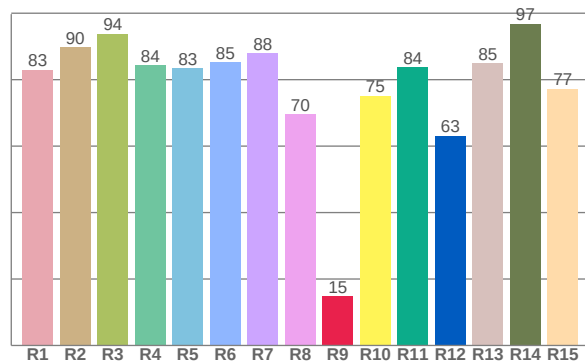

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83.0	89.7	93.8	84.3	83.4	85.2	87.9	69.6	14.8	75.2	83.8	63.2	84.9	96.9	77.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
75.1	84.6	80.9	87.4	88.7	94.2	90.1	84.8	82.7	73.5	74.0	84.2	85.6	82.7	72.3	78.9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
83.5	98.6	78.6	75.6	81.4	84.1	86.7	90.0	97.3	87.8	84.2	83.0	82.9	72.7	76.7

CQS: 82.7

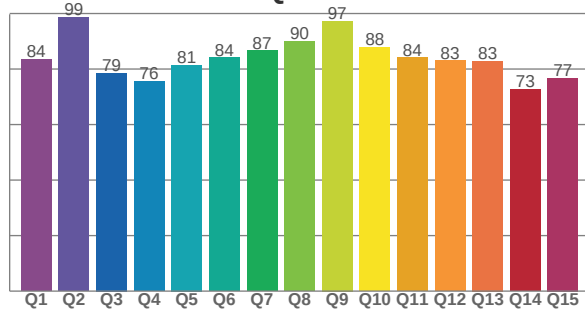

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5045 K	84.6	14.8	82.8	94.6	82.7	0.345	0.357	0.209	0.325	-0.0003



TM30 Report







Rf 82.8

Fidelity index Rf

Rg 94.6

Gammut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	75	-11%	0%
2	85	-7%	5%
3	81	-4%	8%
4	87	-2%	5%
5	89	-2%	2%
6	94	0%	-1%
7	90	-5%	-2%
8	85	-8%	2%
9	83	-8%	11%
10	73	-4%	14%
11	74	3%	15%
12	84	6%	6%
13	86	7%	-6%
14	83	3%	-9%
15	72	-1%	-18%
16	79	-4%	-11%

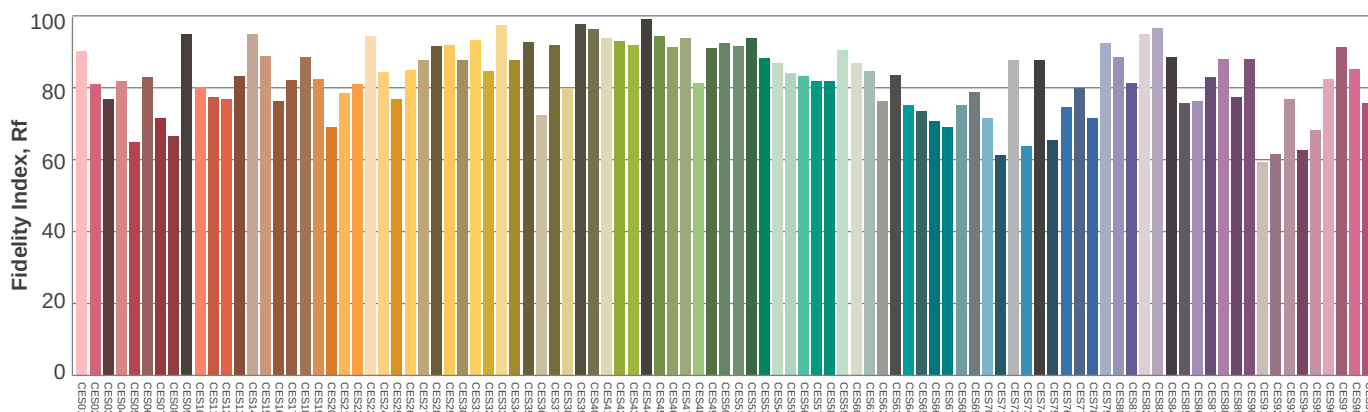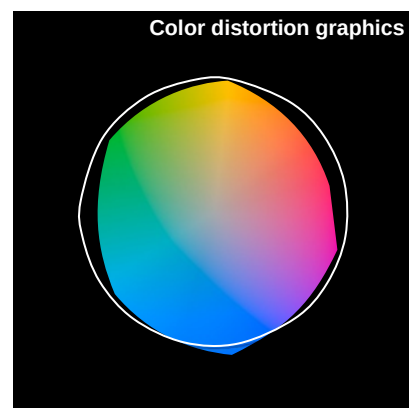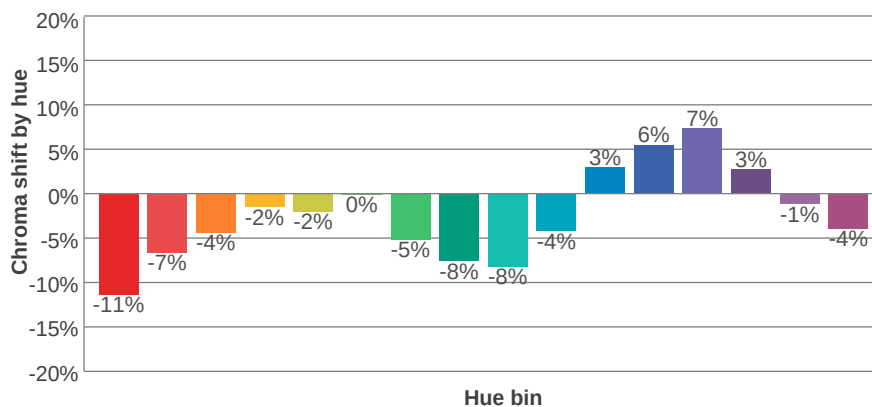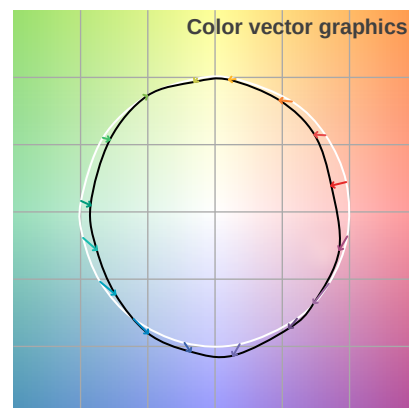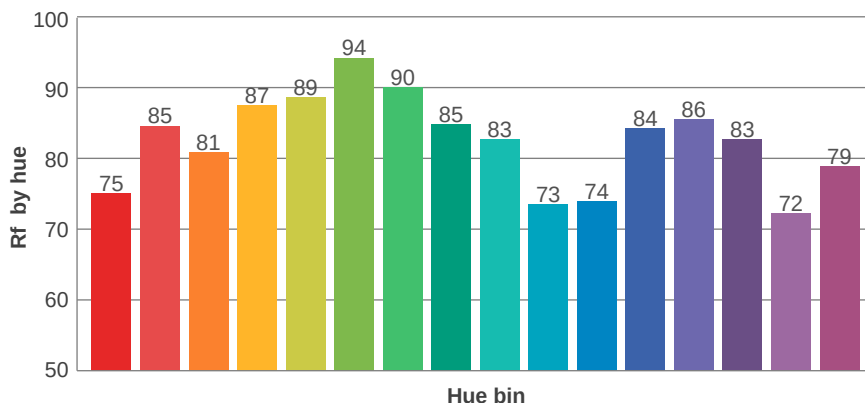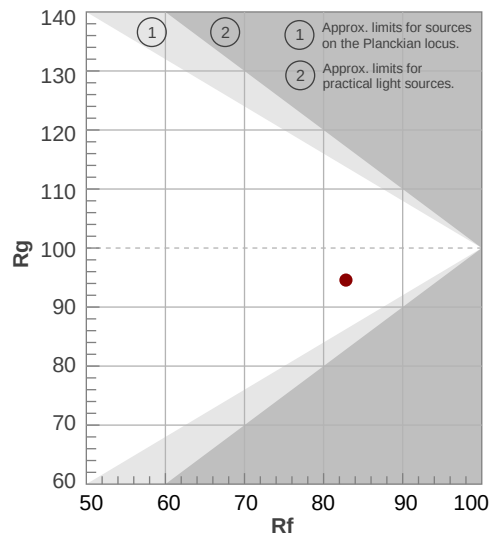

Color Evaluation Sample



Illumination

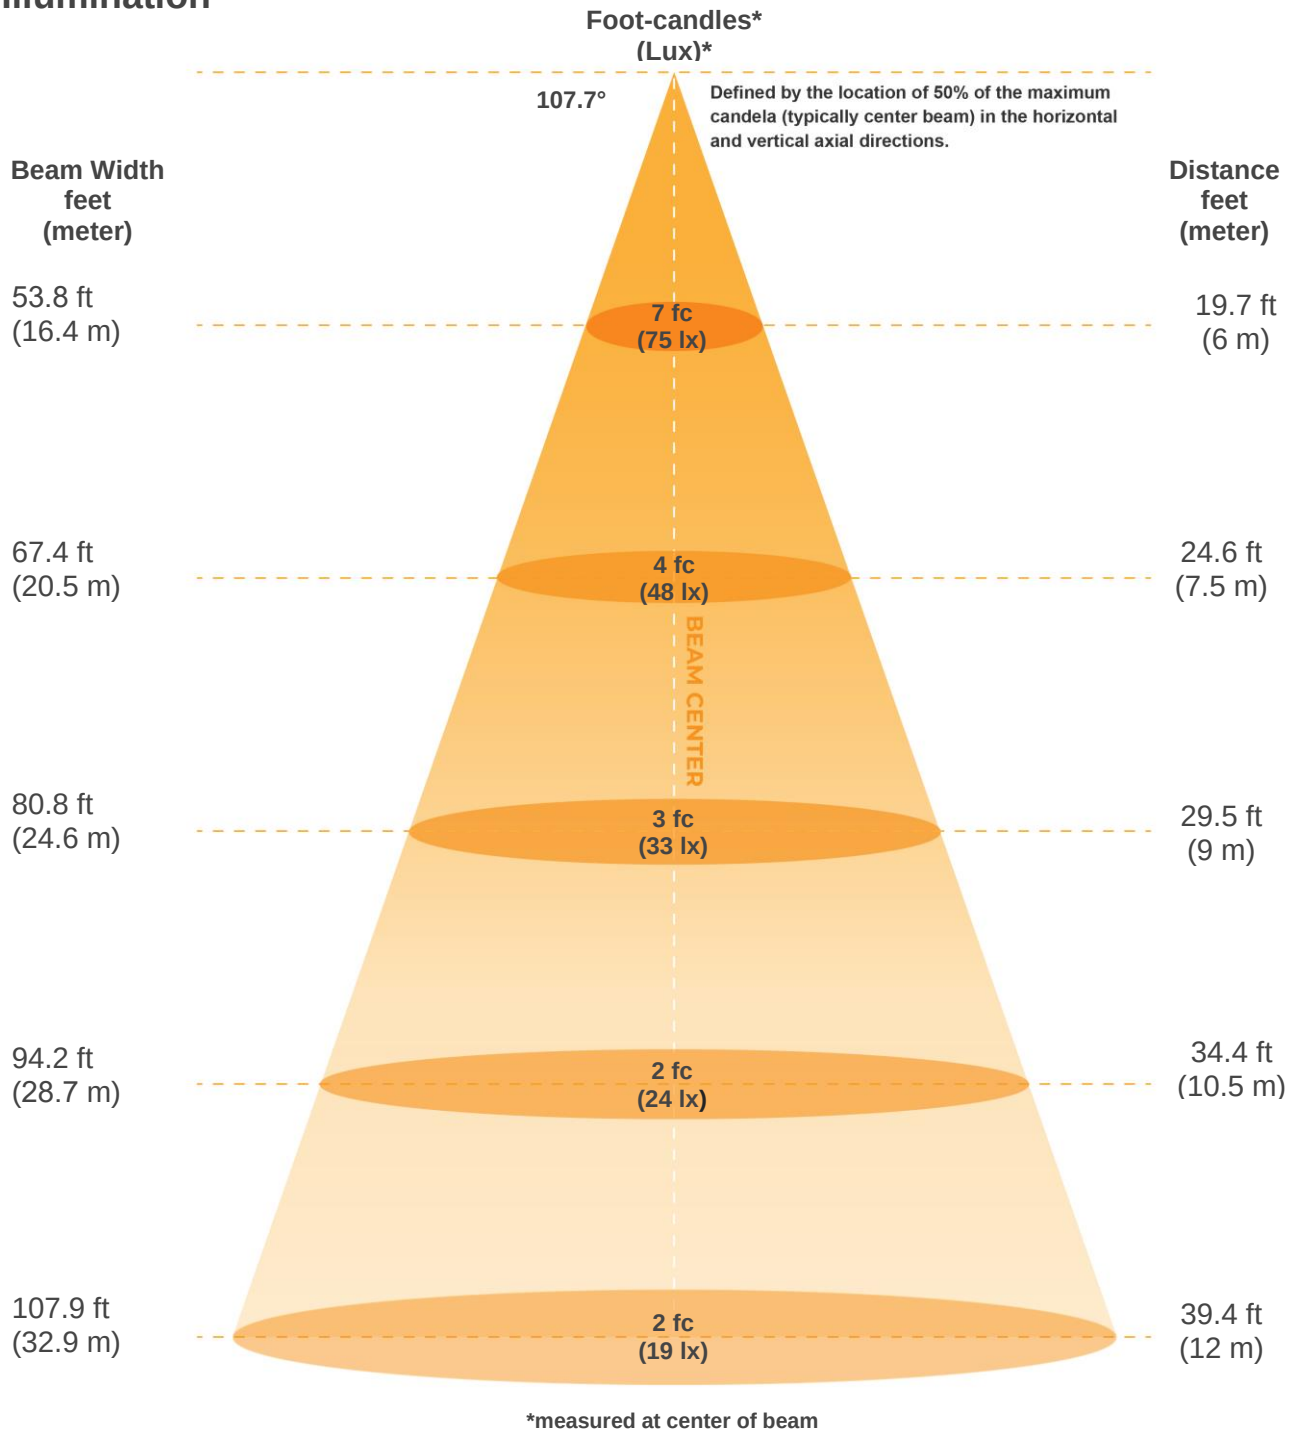

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
269lx	673lx	299lx	168lx	108lx	75lx	55lx	42lx	33lx	27lx	22lx	19lx	16lx	14lx	12lx	11lx	9lx	8lx	7lx	7lx
250fcd	62.5fcd	27.8fcd	15.6fcd	10fcd	6.9fcd	5.1fcd	3.9fcd	3.1fcd	2.5fcd	2.1fcd	1.7fcd	1.5fcd	1.3fcd	1.1fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
107.7°	157.5°	170.1°	65.8%	37.9%



ISO Diagrams

ISO candela diagram

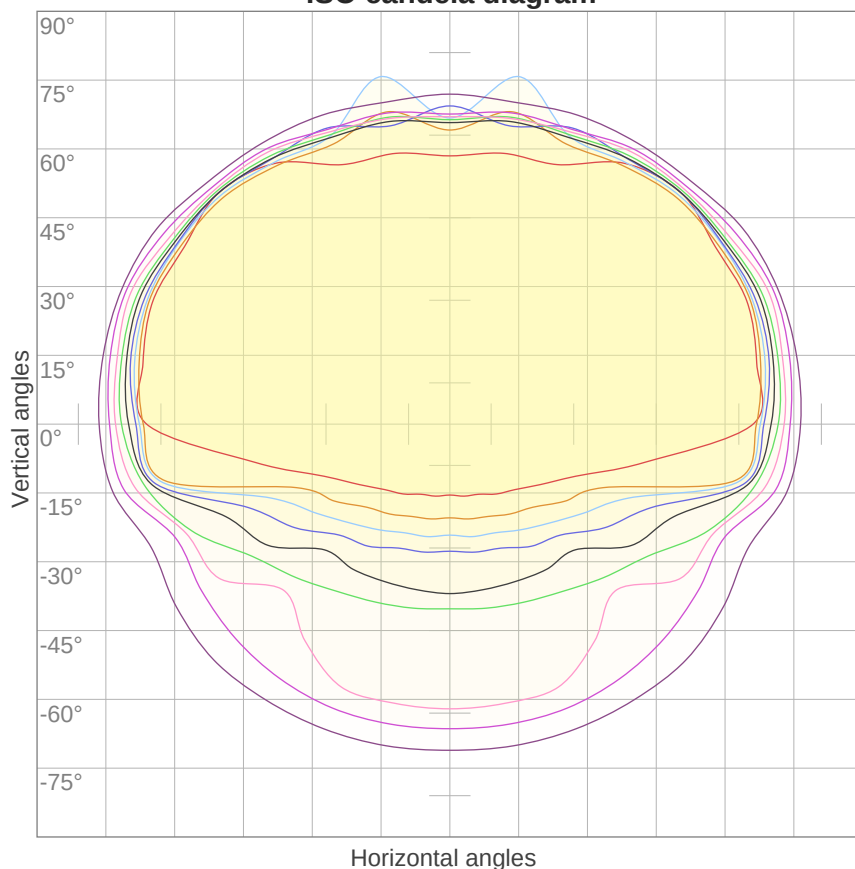


10%	269 cd
20%	538 cd
30%	807 cd
40%	1076 cd
50%	1345 cd
60%	1614 cd
70%	1883 cd
80%	2153 cd
90%	2422 cd

Conditions:

Number of c-planes: 16

Candela at center: 2691 cd

ISO lux diagram

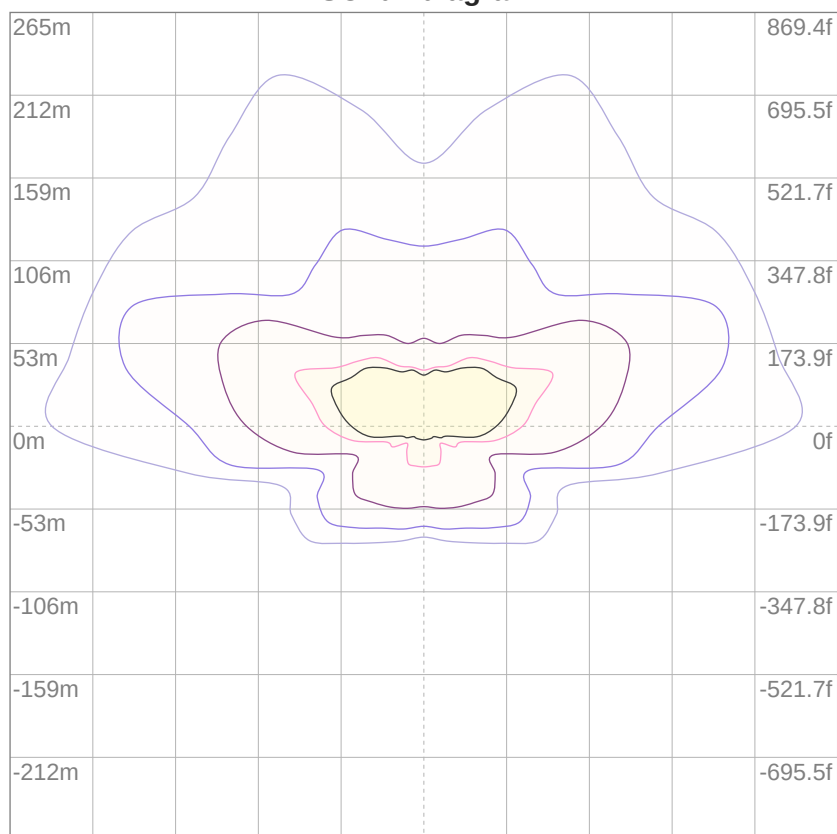

3%	0.807 lx
5%	1.35 lx
10%	2.69 lx
30%	8.07 lx
50%	13.5 lx

Conditions:

Number of c-planes: 16

Lux at center: 26.9 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	107	101	96	92	104	99	94	90	94	91	87	90	87	84	87	84	82	80
2	95	85	77	71	92	83	76	70	80	74	68	76	71	66	73	69	65	62
3	85	73	64	56	83	71	63	55	68	61	54	65	59	53	63	57	52	50
4	77	63	53	46	74	62	52	45	59	51	44	57	50	44	54	48	43	41
5	70	56	45	38	68	54	45	38	52	44	37	50	42	37	48	41	36	34
6	64	49	39	32	62	48	39	32	46	38	32	44	37	31	43	36	31	29
7	59	44	34	28	57	43	34	28	42	33	27	40	33	27	39	32	27	25
8	55	40	31	24	53	39	30	24	38	30	24	36	29	24	35	28	23	21
9	51	36	27	21	49	36	27	21	34	27	21	33	26	21	32	26	21	19
10	48	33	25	19	46	33	25	19	32	24	19	31	24	19	30	23	19	17

LAMPS (number of lamps)

Luminaire budgetary diagram

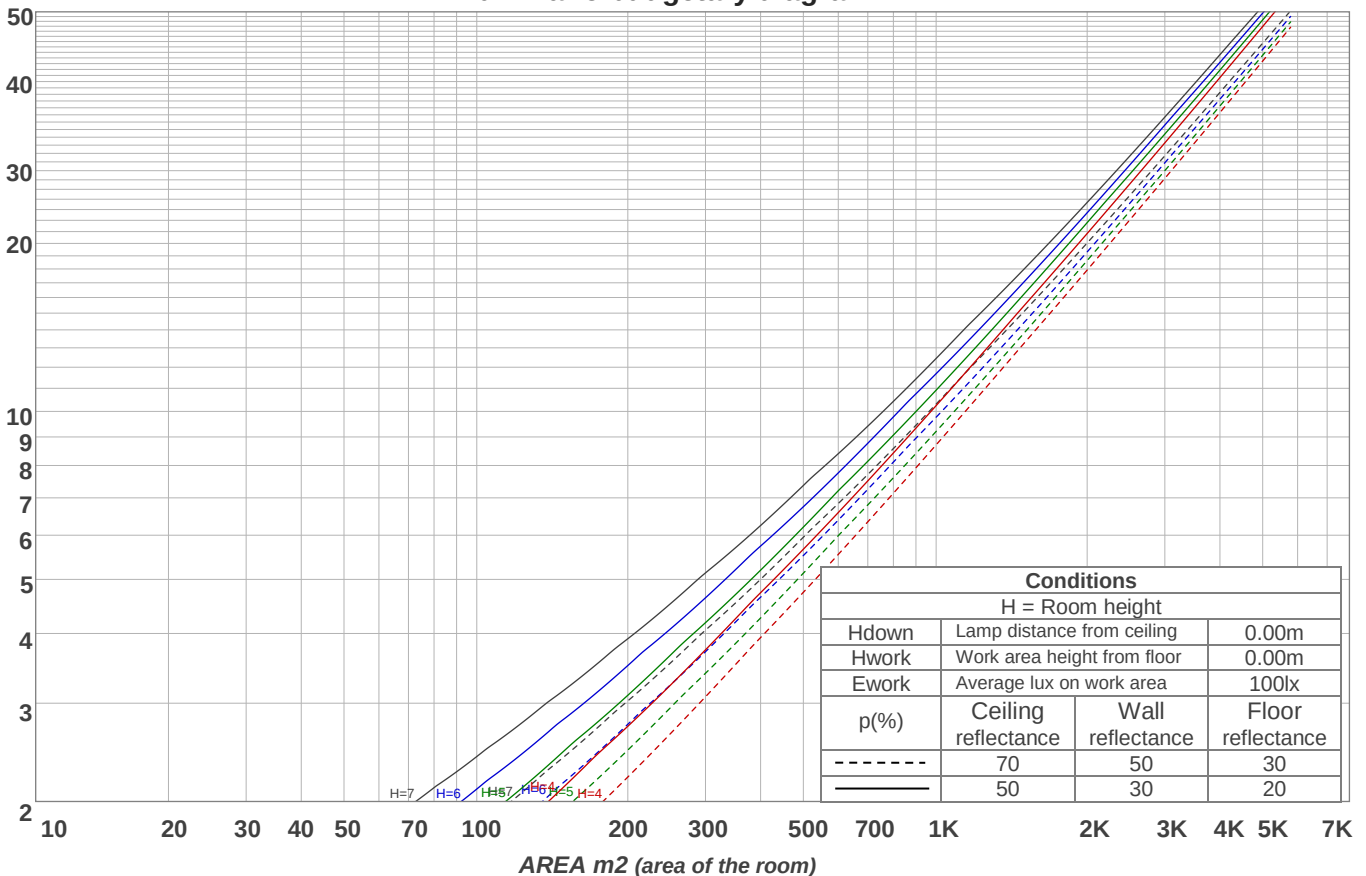

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
258 lm	767 lm	1226 lm	1633 lm	2061 lm	2500 lm	2582 lm	1532 lm	229 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
5.22 lm	4.61 lm	5.30 lm	5.55 lm	5.31 lm	4.58 lm	3.54 lm	2.14 lm	0.734 lm




Road Report

LCS table


BUG rating:	B3 U2 G3	
Forward light	Lumens	Lumens %
Low(0-30):	1125.6	8.8%
Medium(30-60):	3096.9	24.1%
High(60-80):	2058	16%
Very high(80-90):	115.3	0.9%
Back light		
Low(0-30):	1125.6	8.8%
Medium(30-60):	3096.9	24.1%
High(60-80):	2058	16%
Very high(80-90):	115.3	0.9%
Uplight		
Low(90-100):	5.3	0%
High(100-180):	31.8	0.2%

LCS graph

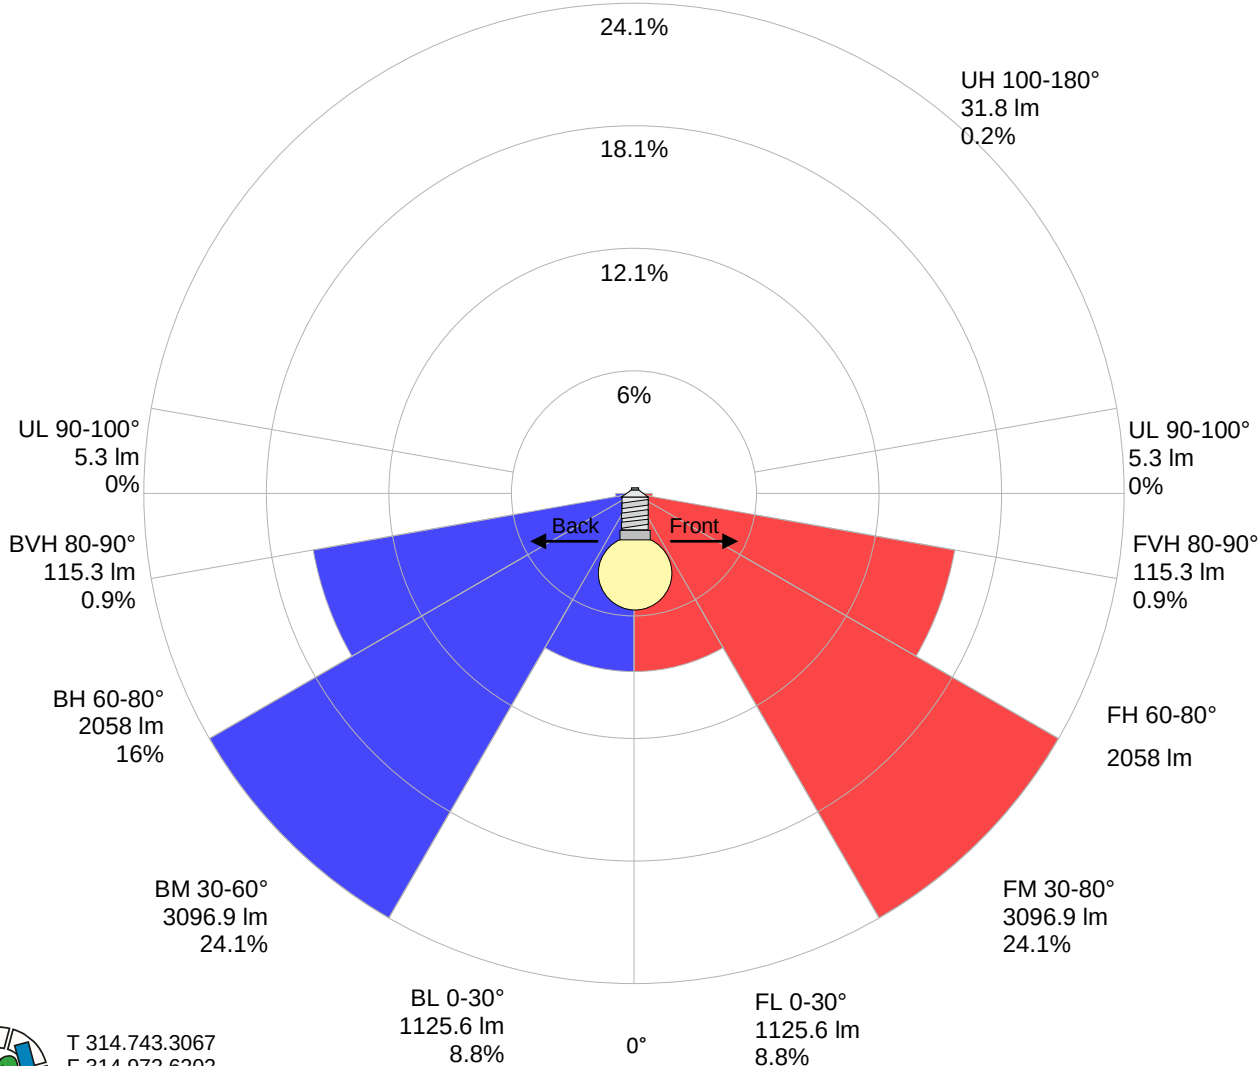

Stabilization

Warmup curve

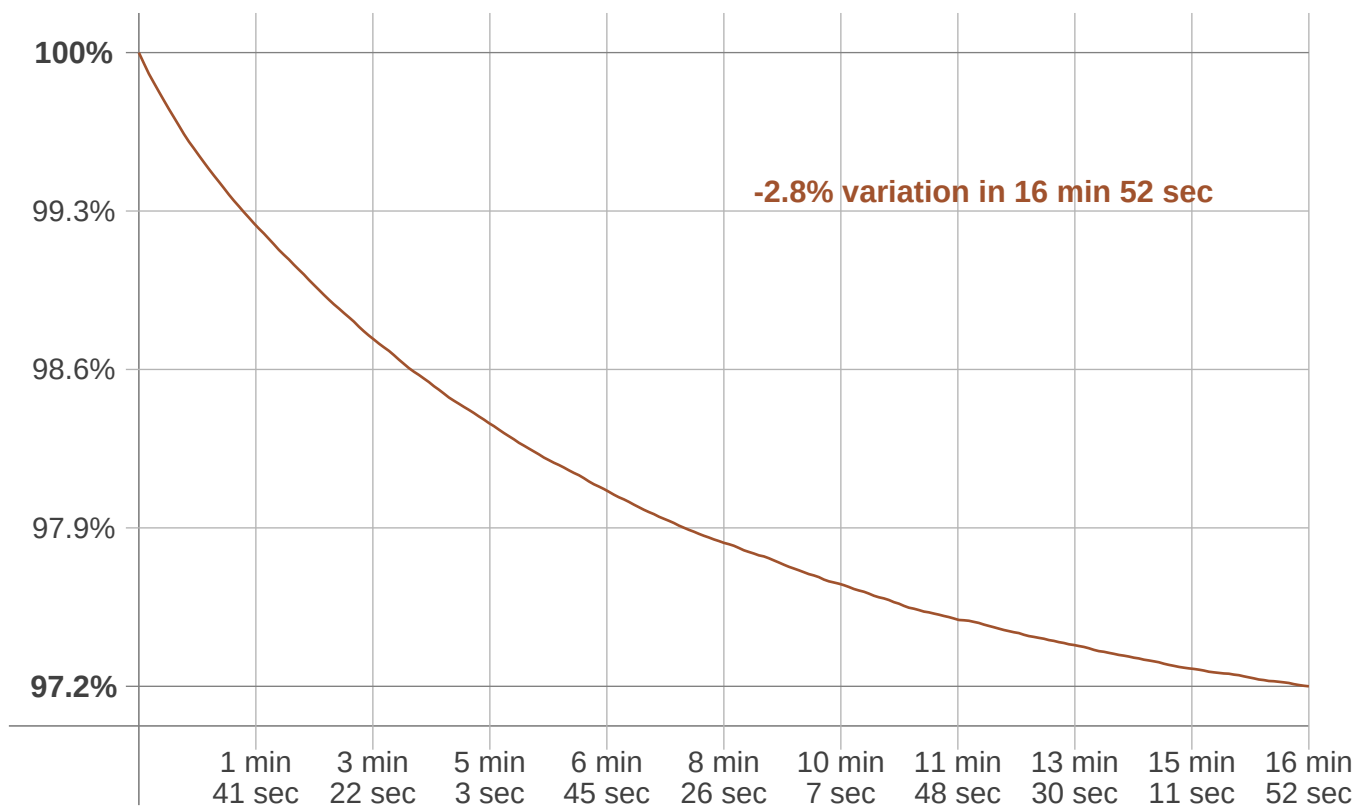

Warmup result

Warmup time:	16 min 52 sec
Warmup variation	-2.8%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
4989 K	+56 K	5045 K

Output change

Output start	Output change	Output end
13179 lm	-354 lm	12826 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

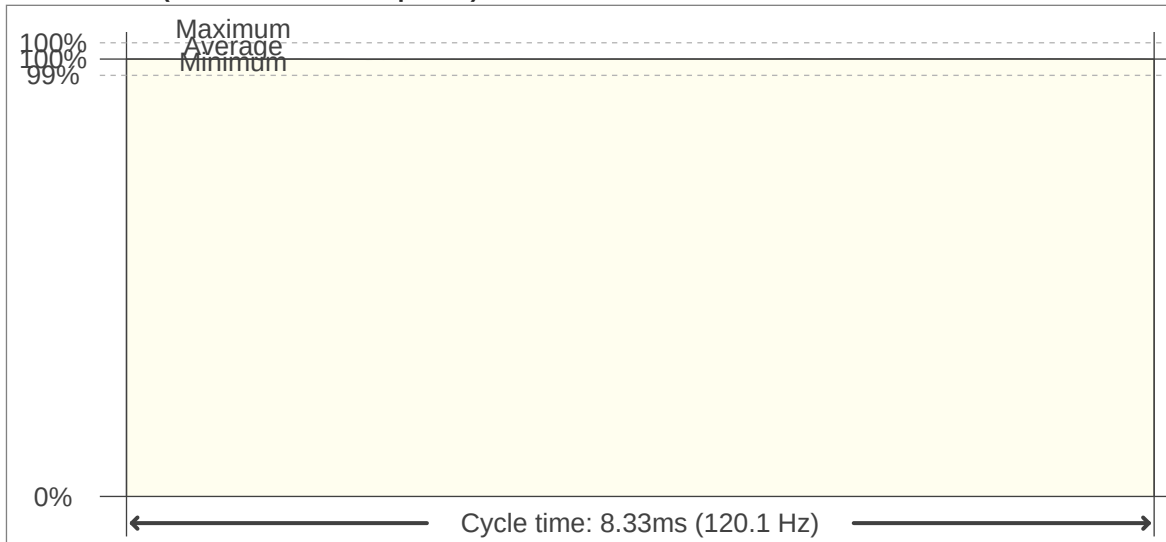

Flicker FFT (frequency scope of flicker curve)

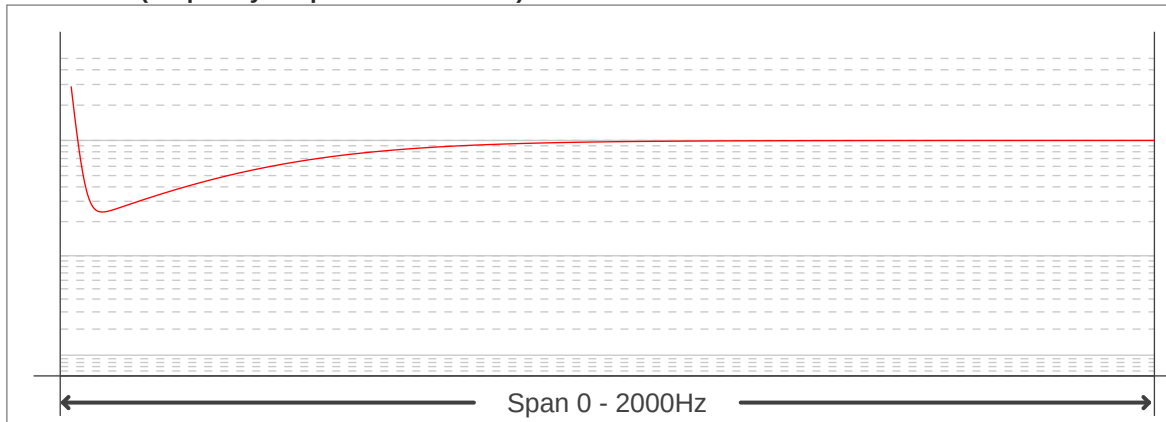

Flicker results:

Flicker frequency:	120.12 Hz
Flicker index:	0
Flicker percentage:	0.09 %
SVM: (Visual flicker)	0

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

