


Important: Read all instructions prior to installation.

Vehicle Underglow Strip Kit

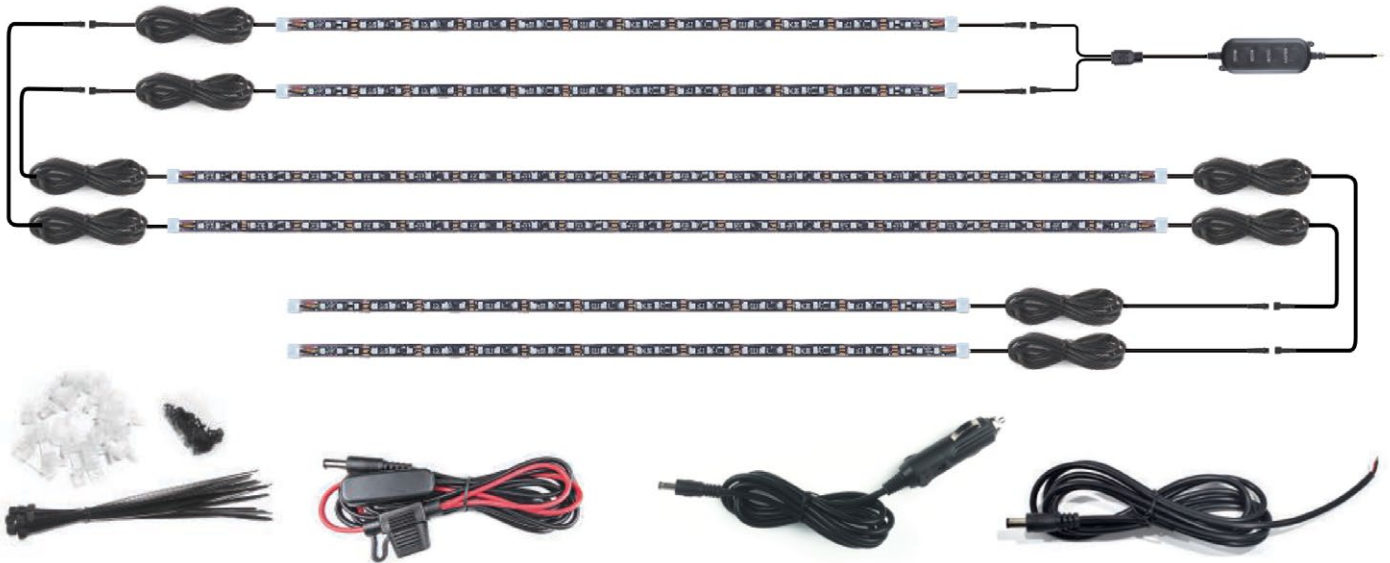

App Instructions

Download and install the Magic Lantern app on a Bluetooth enabled smart device. Follow the instructions in the app to connect it to the light kit.

Apple



Android




Safety and Notes

- To reduce the risk of electric shock, ensure that the battery is disconnected/off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure strips are securely attached. The mounting surface must be properly cleaned and free of contaminants. Failure to properly attach lights may result in damage or injury, for which the manufacturer does not assume responsibility.

Specifications

Specifications	
Operating Temperature	-4°-122° F (-20°-50° C)
IP Rating	IP65
Input Voltage	12 VDC

Remote

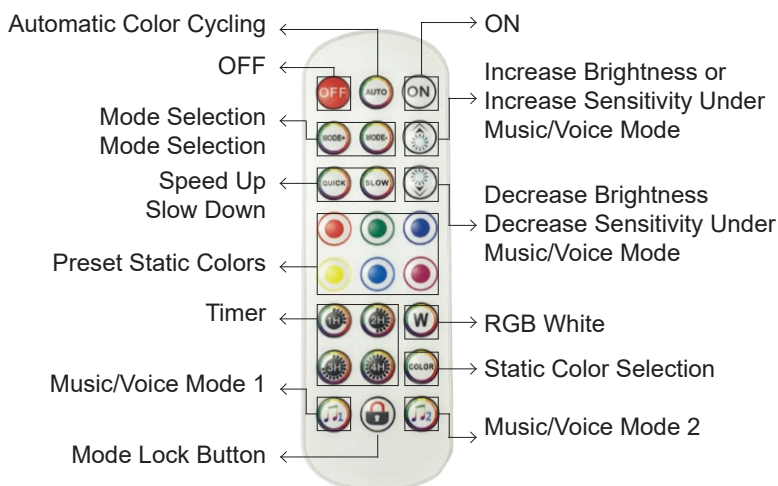

Important: Read all instructions prior to installation.

Vehicle Underglow Strip Kit

Installation

1. Jack car up and place on jack stands (or lift car if possible) for easier access and visibility. **DO NOT ATTEMPT TO ACCESS THE UNDERSIDE OF THE VEHICLE WHILE NOT PROPERLY SUPPORTED BY STANDS OR A LIFT.**
2. Clean all surfaces to remove dust and dirt to allow proper adhesion of 3M tape.
3. Peel 3M tape and apply strips to car, routing and securing wiring between each strip using provided clips or zip ties as needed.
4. Carefully open the inner fender liner.
5. Tuck the remainder of extension cable safely into an open space and secure using zip ties.
6. Connect strips to control box.
7. Route the controller wire under the chassis to the point where you intend to make the electrical connection, making sure to secure wire and keep it away from direct contact with hot parts such as the exhaust.
Note: The microphone for music modes is located on the controller, so make sure this is mounted in a dry area free of ambient noise.
8. Depending on your intended connection method this step will vary slightly.
-If using the 12 V accessory plug, plug it into a 12 V accessory socket in your vehicle.
-If connecting to a non-fused power source, use the included harness with built-in fuse.
-If connecting to a fused power source, use the standard pigtail
Note: Both pigtail harnesses will require a waterproof connection to power.
9. Ensure everything is securely attached/tightened and test lights.

