superbrightleds.com

User Manual

JSML-JL

Important: Read all instructions prior to installation.

2018+ Jeep JL Side Marker Lights

Included Parts

(2) Jeep Wrangler JL Side Marker Lights

Specifications

Fitment	2018+ Jeep Wrangler JL, 2020+ Jeep Gladiator JT
Operating Voltage	12 VDC
IP Rating	IP67 waterproof
Certifications	DOT Compliant, FMVSS 108 P2
Warranty	2-year
Aprox. Dimensions (H x W x D)	2.1 x 4.8 x 1.5 in. (53 x 123 x 38 mm)

Pre Installation Instructions

1. Read all safety notes and mounting guidelines before installing the product.
2. Verify that all parts are present and complete.
3. Verify that all power supply and charging systems comply with the specified voltage limits for the light.
4. Turn off the vehicle and disconnect the battery.

Installation Instructions

Required Tools[1]

- Trim removal tool, pick tool, or flathead screwdriver
- T30 Torx driver (slim)

Pro Tips: Retain all screws and trim clips in a safe location for reinstallation. For better access turn your wheels in the direction of the side you are working on.

1. Use the trim removal tool to remove two (2) trim clips along the fender liner and pull back the liner.

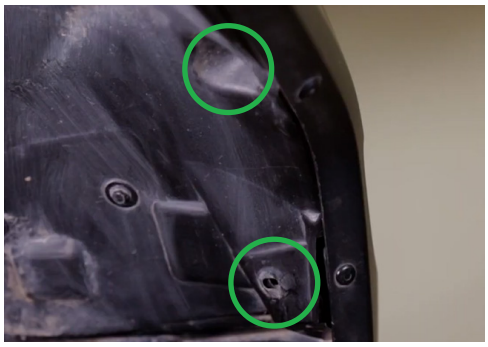

2. Disconnect the stock side marker light from the factory wire harness using a pick tool or small flathead screwdriver.

[1]Required tools may vary by model and trim level. Subject to change without notice.

4400 Earth City Expy, St. Louis, MO 63045 • 866-590-3533 • superbrightleds.com

Important: Read all instructions prior to installation.

2018+ Jeep JL Side Marker Lights

Instructions Cont.

3. Locate the outermost Torx T30 screw that holds the side marker light in place and use the T30 driver to remove the screw. Pull the light from the housing.

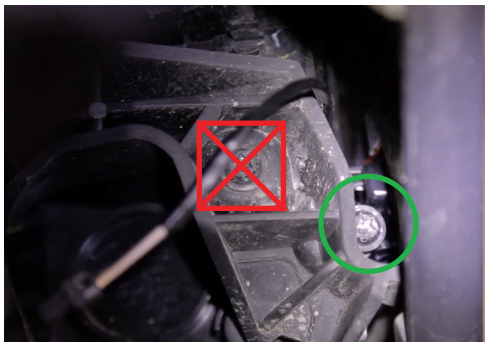

4. Using the guide tabs on the back of the LED side marker light, insert the light into the housing and plug in the factory wire harness.

5. Repeat steps 1-4 for the other side marker light.

6. Reconnect the battery and apply power to test functionality.

7. Reinstall both T30 Torx screws to secure the lights and replace the fender liner trim clips to complete the installation.

[1]Required tools may vary by model and trim level.
Subject to change without notice.

4400 Earth City Expy, St. Louis, MO 63045 • 866-590-3533 • superbrightleds.com