



- Recommended for the construction of sealed lighting fixtures


APPLICATION

- LED protection and light diffusion in lighting fixtures

MONTAGE

- to the profile, by pressing

TECHNICAL DRAWING

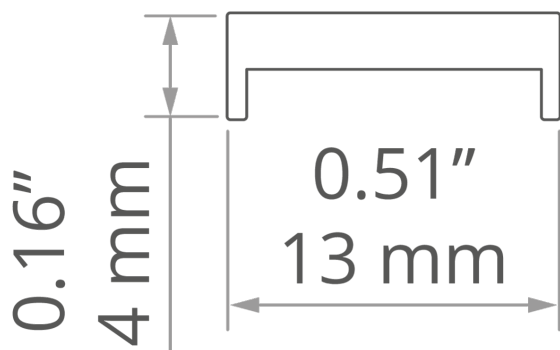

TECHNICAL SPECIFICATIONS

Material	PC	Color	Length	Light transmission	Possibility of obtaining a line of light	Ref
Shape	flat		1000 mm			1369_1
Maximum length on request	3000 mm	<input type="checkbox"/> frosted	2000 mm	73	yes	1369_2
Width	13 mm		3000 mm			1369_3
UV resistance	yes		1000 mm			1370_1
		<input checked="" type="checkbox"/> clear	2000 mm	94	no	1370_2
			3000 mm			1370_3


RELATED PROFILES



45-16
B8504



45-ALU
B4023



45-MDF
0973_1



DES
18030



GLAD-45
B7009



KOZMA
18040



KUBIK-45
B7697



LIT-L
18033



MICRO-ALU
B1888



MICRO-H
C0599



MICRO-HG
C1419




MICRO-K
B3775




MICRO-NK
C1587



MICRO-PLUS
C2966



MOD-100
18049



MOD-50
18047



NISA-KON
18027



NISA-KRA
18026



NISA-NI
18029



NISA-PLA
18028




OBIT
W4826



OLEK
B8505



OPK-4
C0370



PAC-MDF
0972_1



PDS-4-ALU
B1718

Cover HS

Ref. 1369, 1370




PDS-4-K
B3776



PDS-4-PLUS
C1263



PDS-H
B9204



PDS-MDF
0971_1



PDS-NK
C1588



PDS-O
B3777



PDS-T
C2057



PDS-UST
C2725




PDS-ZM
B7696




PDS-ZM-PLUS
C2056



PDS-ZMG
C1418



POK-US
H1234



POKET
H1179



POLI
B7176




POR
B6144



PULA
18035




STEP
18042



STOS-MDF
0974_1

RELATED SYSTEMS



MOD-50
18047



PK-4
18044+C0370

Cover HS
Ref. 1369, 1370