

Light efficiency:

144 Lumen/Watt

Output: 11589 lm

Light quality:

CRI: 83.1


Peak: 6767 cd

Color temperature:

5155 K

Power: 80.6 W

PF: 0.99

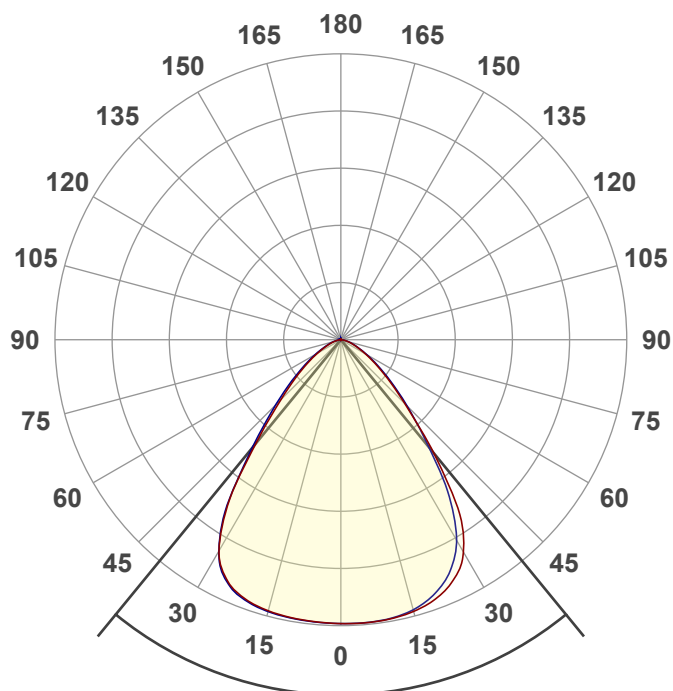

Product name:

UHBD-S1-50K80-80H

Date and time:

12/1/2022 1:39:33 PM

Beam angle

78.7°




CIE 1931


x: 0.341

y: 0.351

Spectra

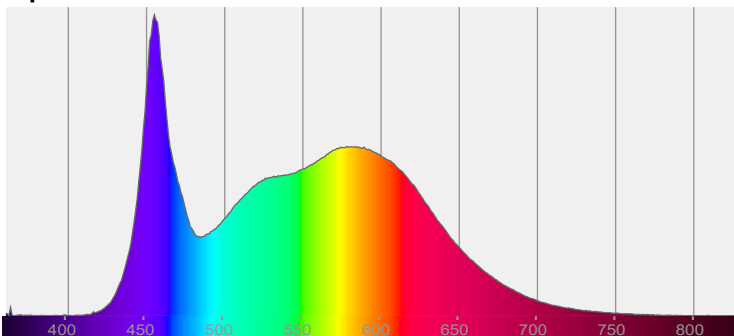

Power

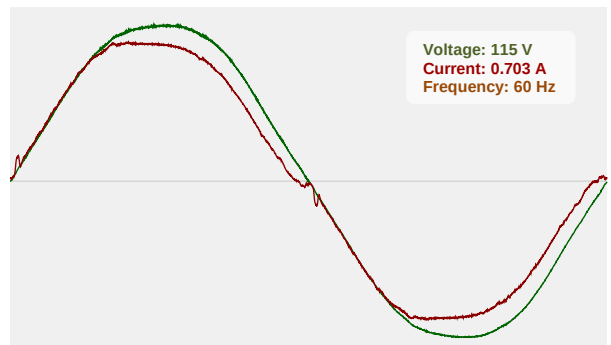



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

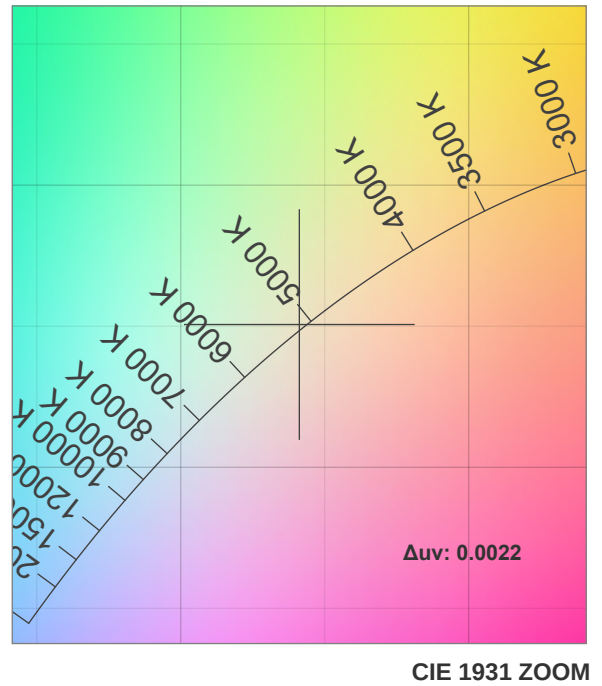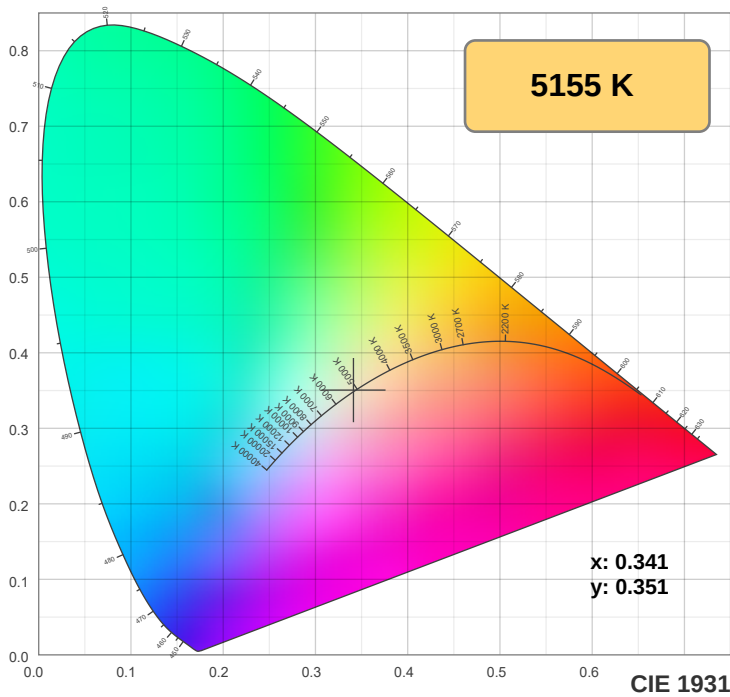

TM30: 82.5

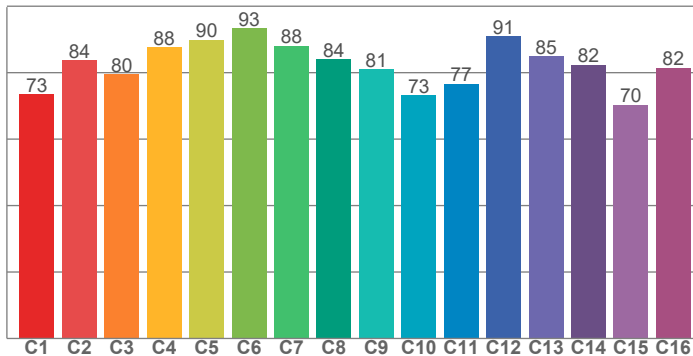

CRI: 83.1 (R1-R8)

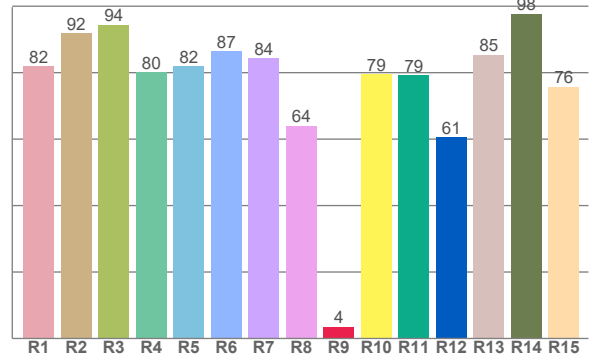

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82.0	91.8	94.4	80.0	81.9	86.5	84.4	64.0	3.6	79.5	79.3	60.5	85.3	97.7	75.7


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
73.4	83.8	79.5	87.7	89.9	93.4	88.1	84.0	81.0	73.1	76.7	90.9	85.0	82.4	70.3	81.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79.2	97.6	78.5	71.0	75.8	78.9	83.8	88.0	97.5	88.7	82.8	80.2	79.5	68.6	72.9

CQS: 79.8

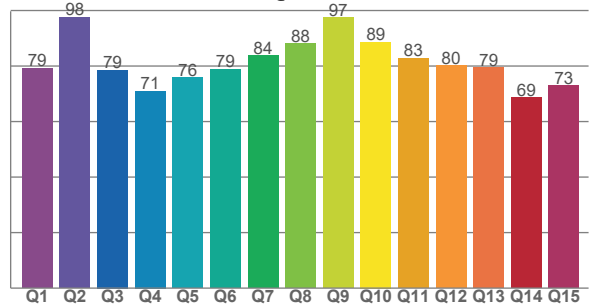

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5155 K	83.1	3.6	82.5	92.8	79.8	0.341	0.351	0.209	0.322	0.0022



TM30 Report







Rf 82.5

Fidelity index Rf

Rg 92.8

Gammut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	73	-14%	1%
2	84	-8%	6%
3	80	-4%	10%
4	88	-2%	5%
5	90	-3%	2%
6	93	-2%	-2%
7	88	-7%	-1%
8	84	-9%	4%
9	81	-8%	13%
10	73	-3%	16%
11	77	4%	14%
12	91	5%	0%
13	85	7%	-9%
14	82	1%	-11%
15	70	1%	-25%
16	82	-8%	-7%

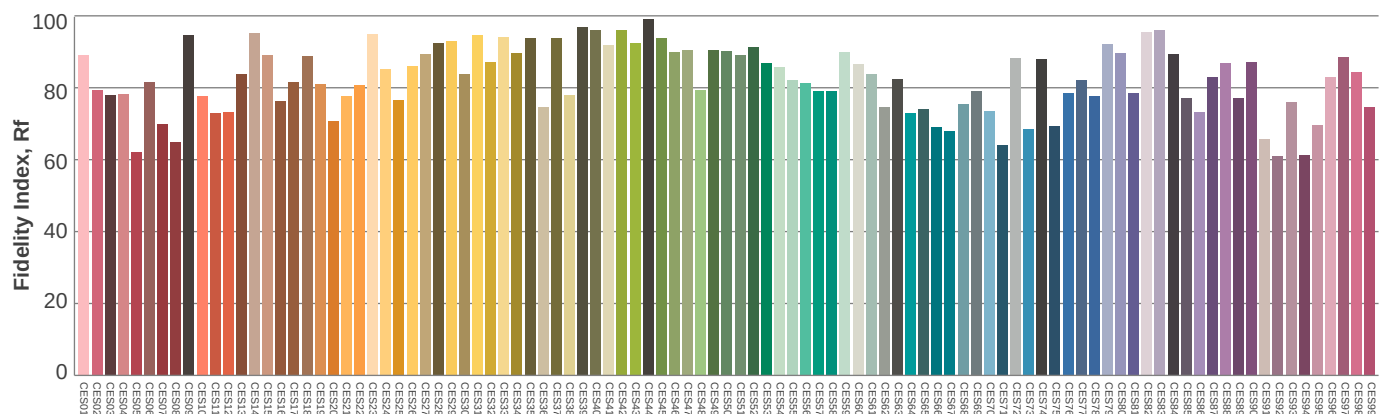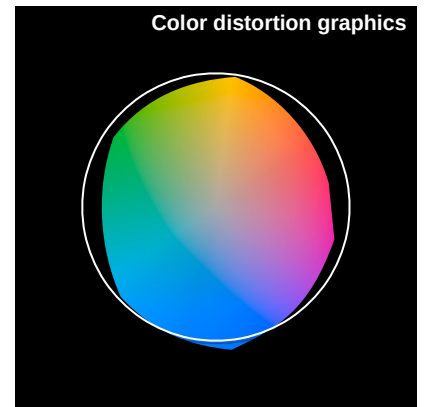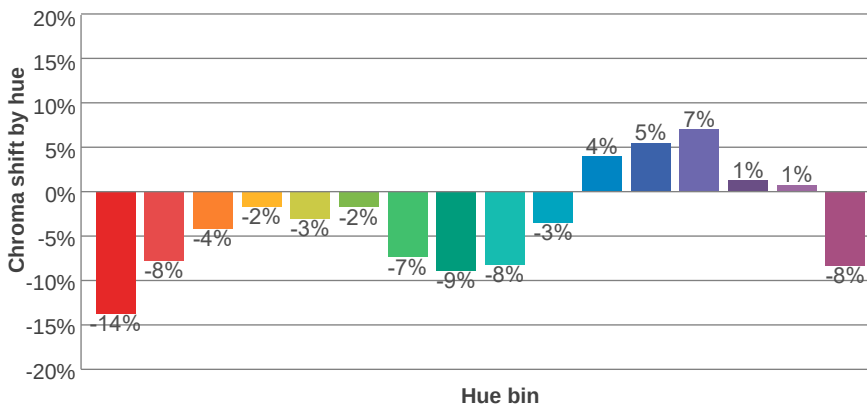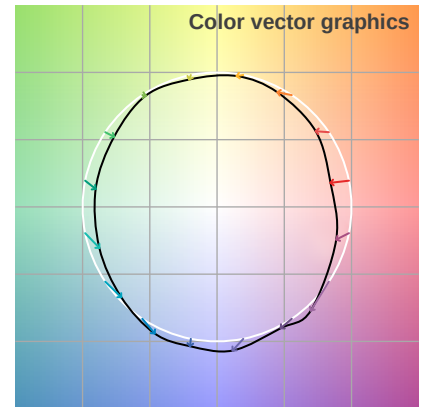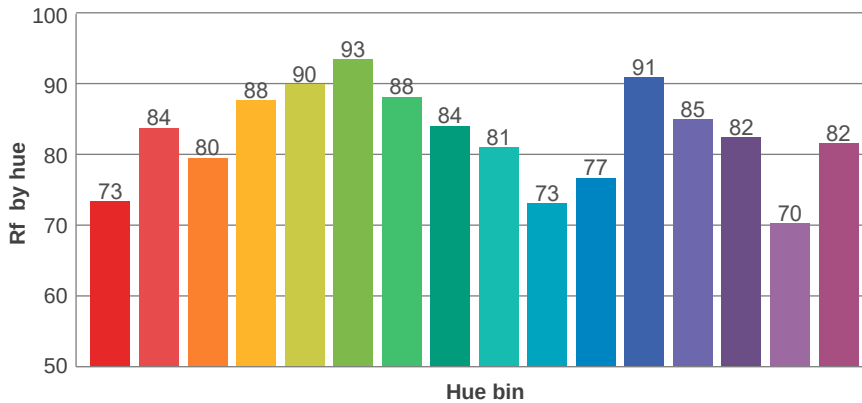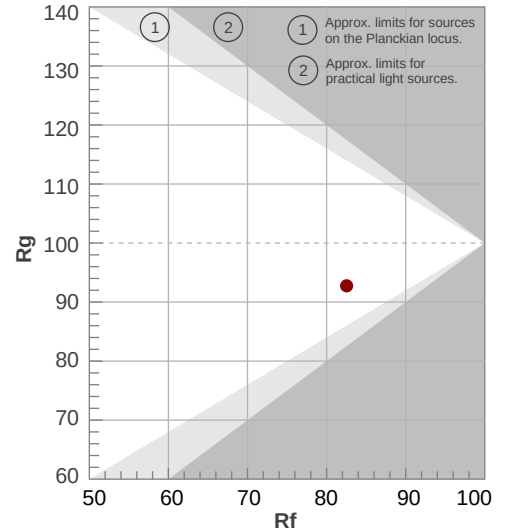

Color Evaluation Sample



Illumination

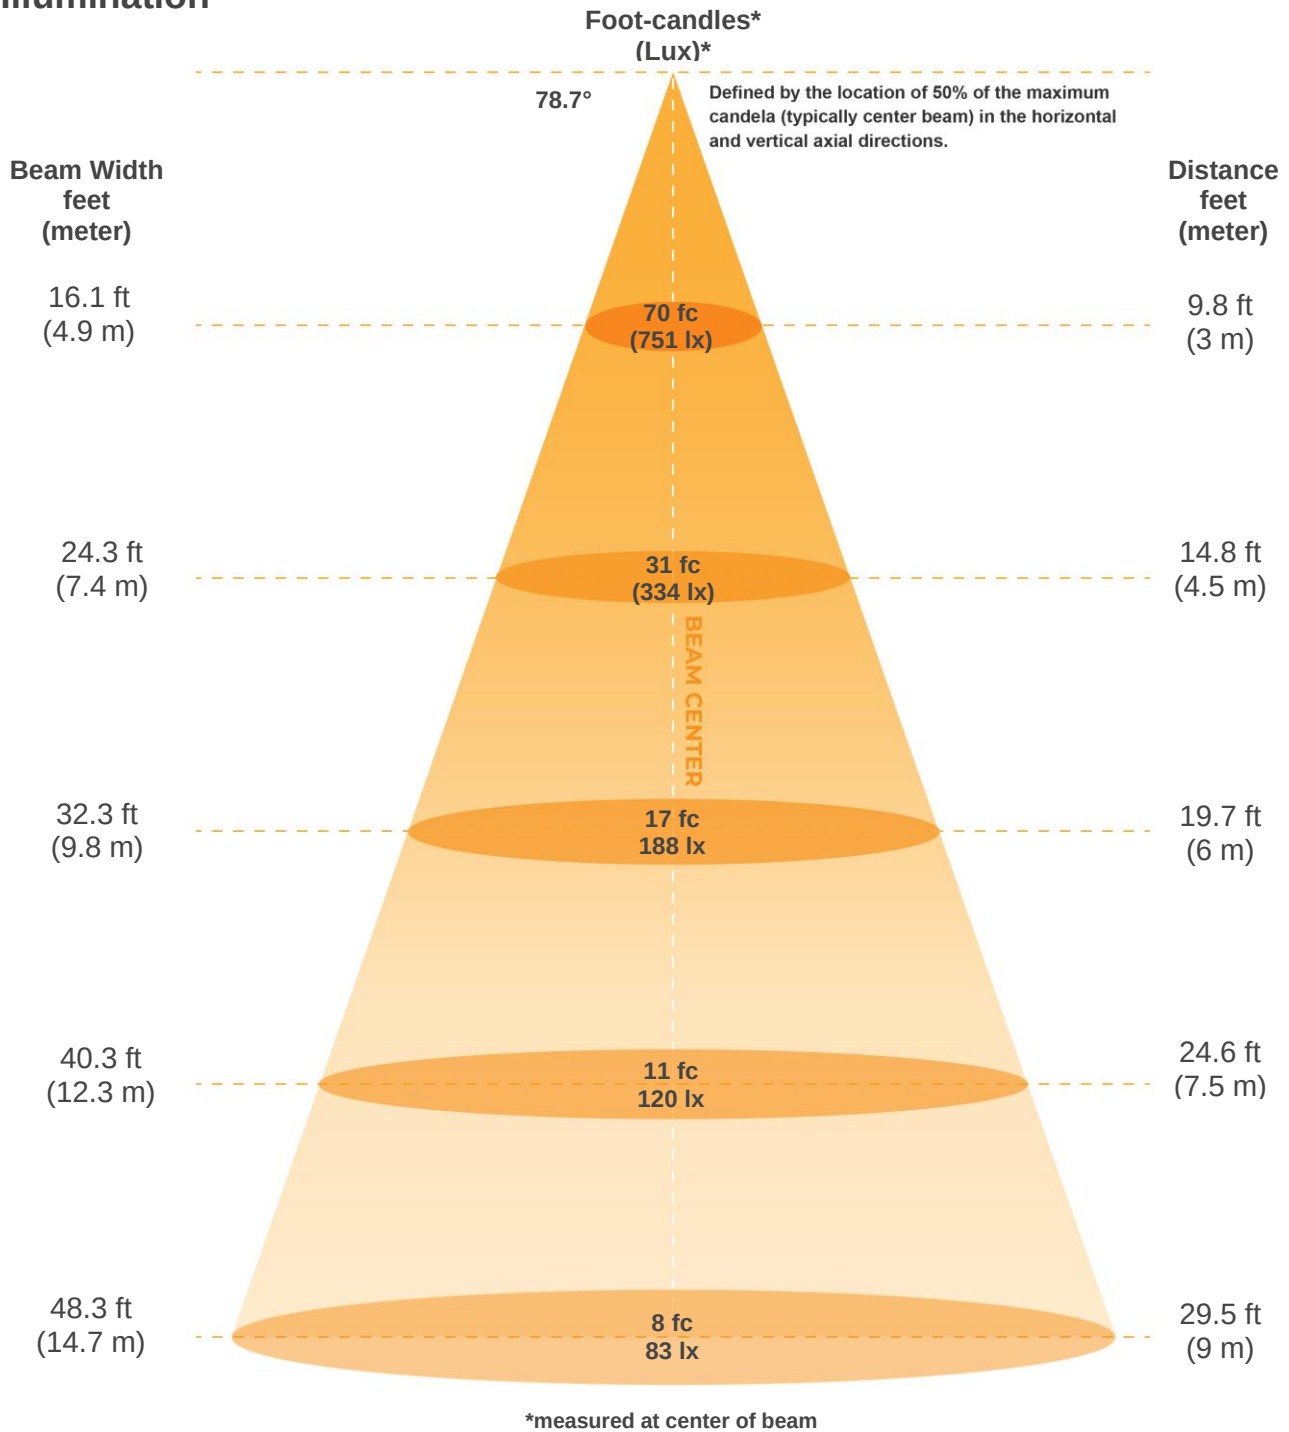

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
6758lx	1689lx	751lx	422lx	270lx	188lx	138lx	106lx	83lx	68lx	56lx	47lx	40lx	34lx	30lx	26lx	23lx	21lx	19lx	17lx
627.8fc	157fcd	69.8fcd	39.2fcd	25.1fcd	17.4fcd	12.8fcd	9.8fcd	7.8fcd	6.3fcd	5.2fcd	4.4fcd	3.7fcd	3.2fcd	2.8fcd	2.5fcd	2.2fcd	1.9fcd	1.7fcd	1.6fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
78.7°	120.1°	150.8°	93.8%	79.6%



ISO Diagrams

ISO candela diagram

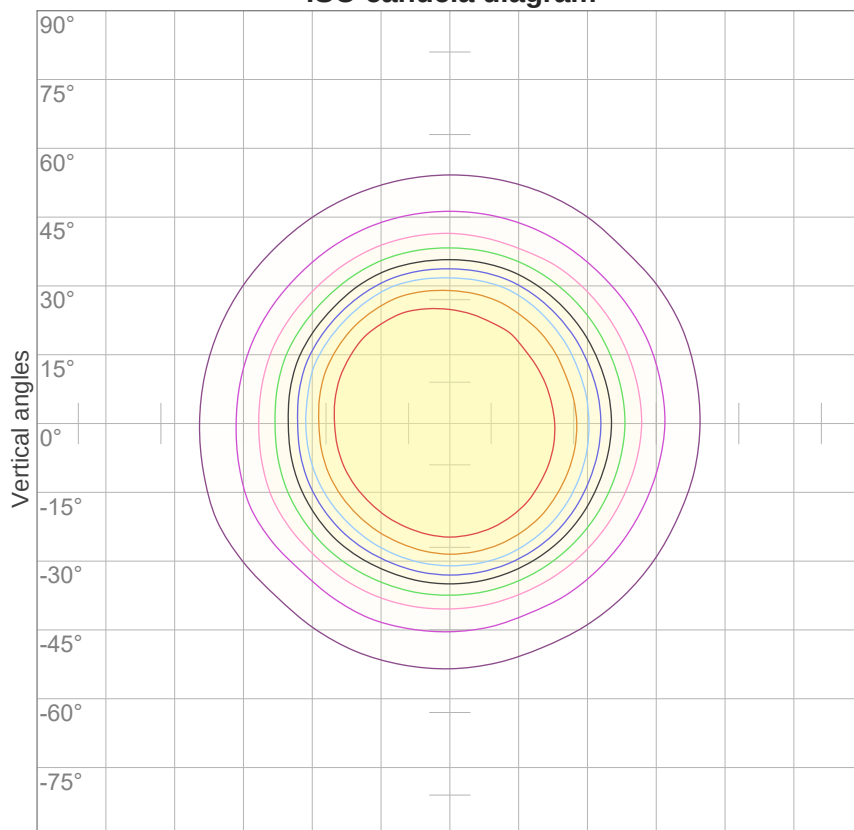


10%	676 cd
20%	1352 cd
30%	2027 cd
40%	2703 cd
50%	3379 cd
60%	4055 cd
70%	4730 cd
80%	5406 cd
90%	6082 cd

Conditions:

Number of c-planes: 16

Candela at center: 6758 cd

ISO lux diagram

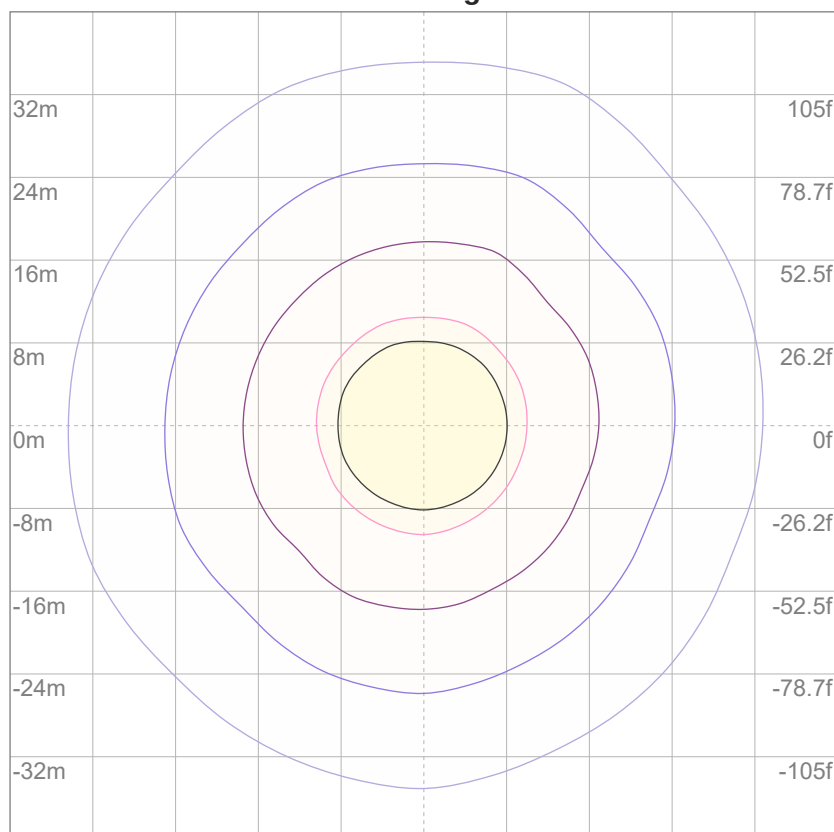

3%	2.03 lx
5%	3.38 lx
10%	6.76 lx
30%	20.3 lx
50%	33.8 lx

Conditions:

Number of c-planes: 16

Lux at center: 67.6 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	99	97	98	96	94	94	93	92	90
2	104	98	93	89	102	96	91	87	93	89	85	90	86	84	87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76	82	78	74	80	76	73	71
4	91	81	74	69	89	80	73	68	78	72	67	75	71	67	73	69	66	64
5	85	74	67	62	83	73	66	61	71	65	61	69	64	60	68	63	59	58
6	79	68	61	55	78	67	60	55	66	59	55	64	59	54	63	58	54	52
7	74	63	56	50	73	62	55	50	61	54	50	59	54	50	58	53	49	48
8	70	58	51	46	68	58	51	46	56	50	46	55	49	45	54	49	45	43
9	66	54	47	42	64	53	47	42	52	46	42	51	46	42	50	45	41	40
10	62	50	43	39	61	50	43	39	49	43	39	48	42	38	47	42	38	37

LAMPS (number of lamps)

Luminaire budgetary diagram

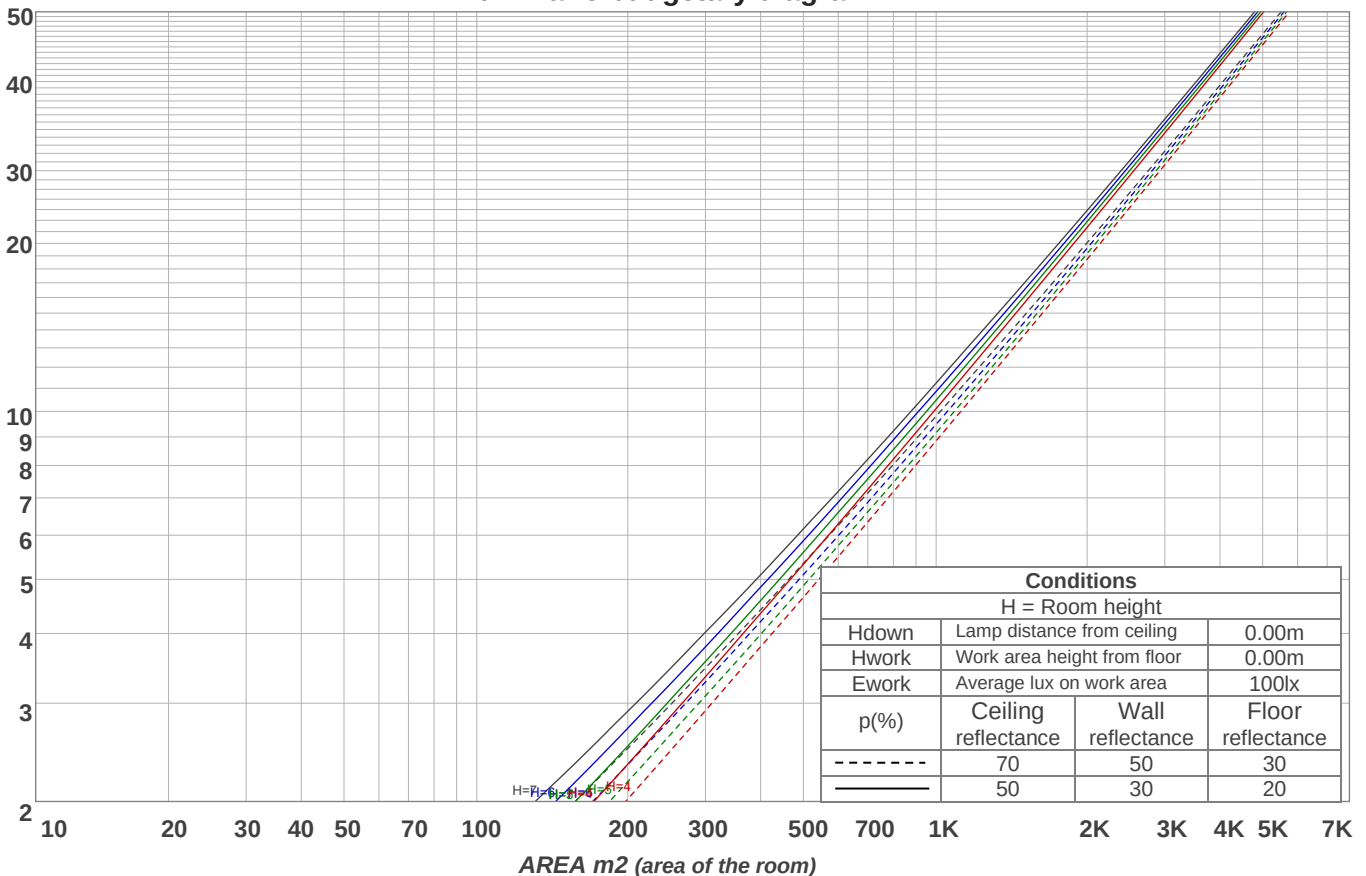

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
644 lm	1886 lm	2872 lm	2834 lm	1711 lm	924 lm	451 lm	190 lm	41.0 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
2.62 lm	3.21 lm	3.80 lm	4.30 lm	5.37 lm	5.75 lm	5.37 lm	3.84 lm	1.39 lm




Road Report

LCS table


BUG rating:	B4 U2 G1	
Forward light	Lumens	Lumens %
Low(0-30):	2700.1	23.3%
Medium(30-60):	2786.3	24%
High(60-80):	327.2	2.8%
Very high(80-90):	21.4	0.2%
Back light		
Low(0-30):	2697.2	23.3%
Medium(30-60):	2686.7	23.2%
High(60-80):	314.4	2.7%
Very high(80-90):	20.3	0.2%
Uplight		
Low(90-100):	2.7	0%
High(100-180):	33	0.3%

LCS graph

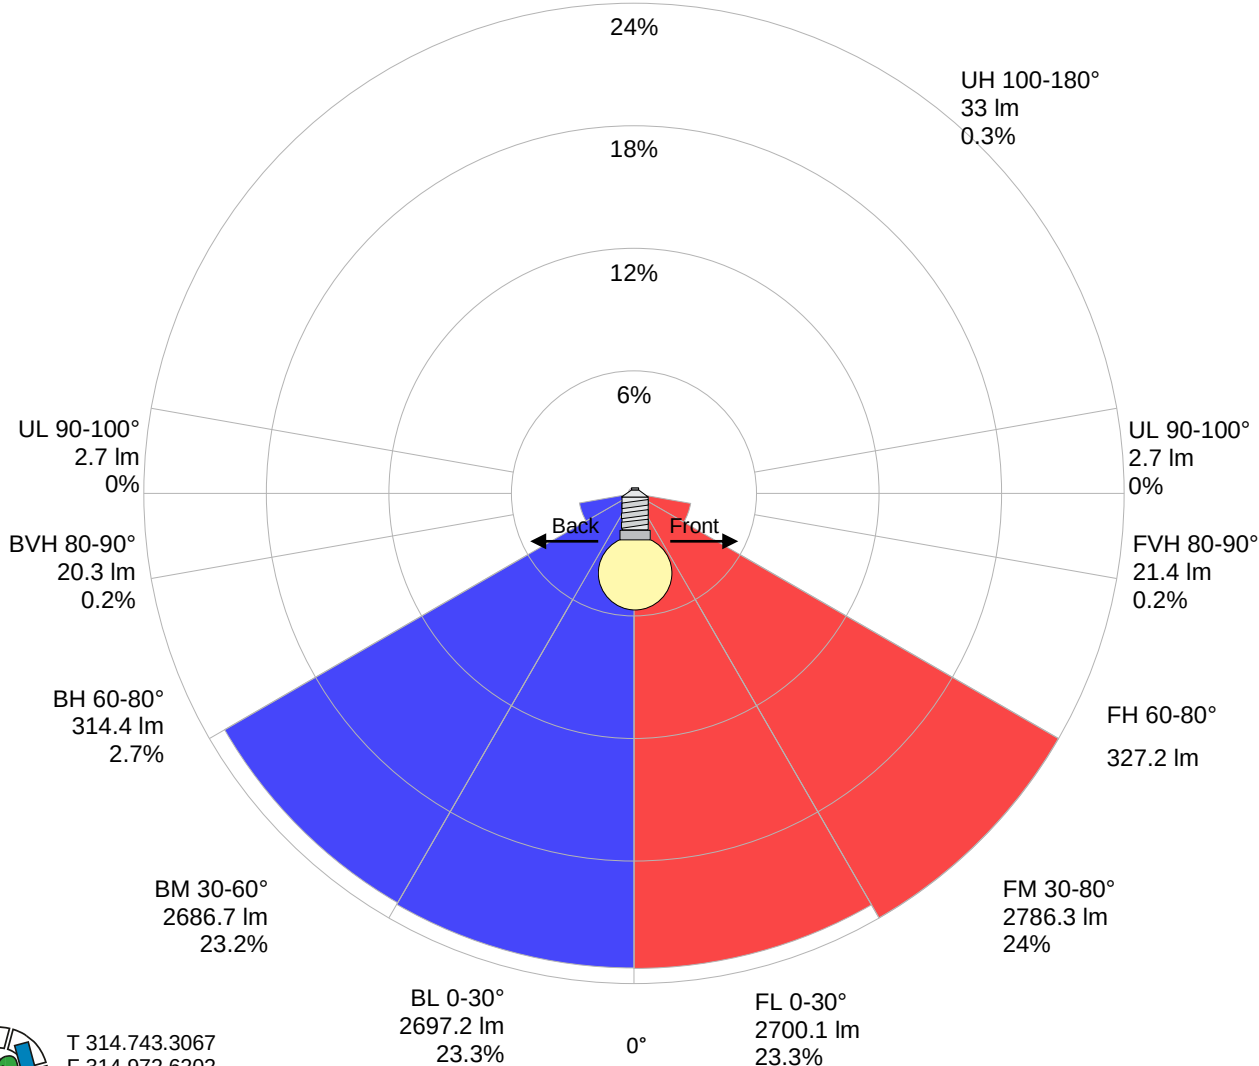

Stabilization

Warmup curve

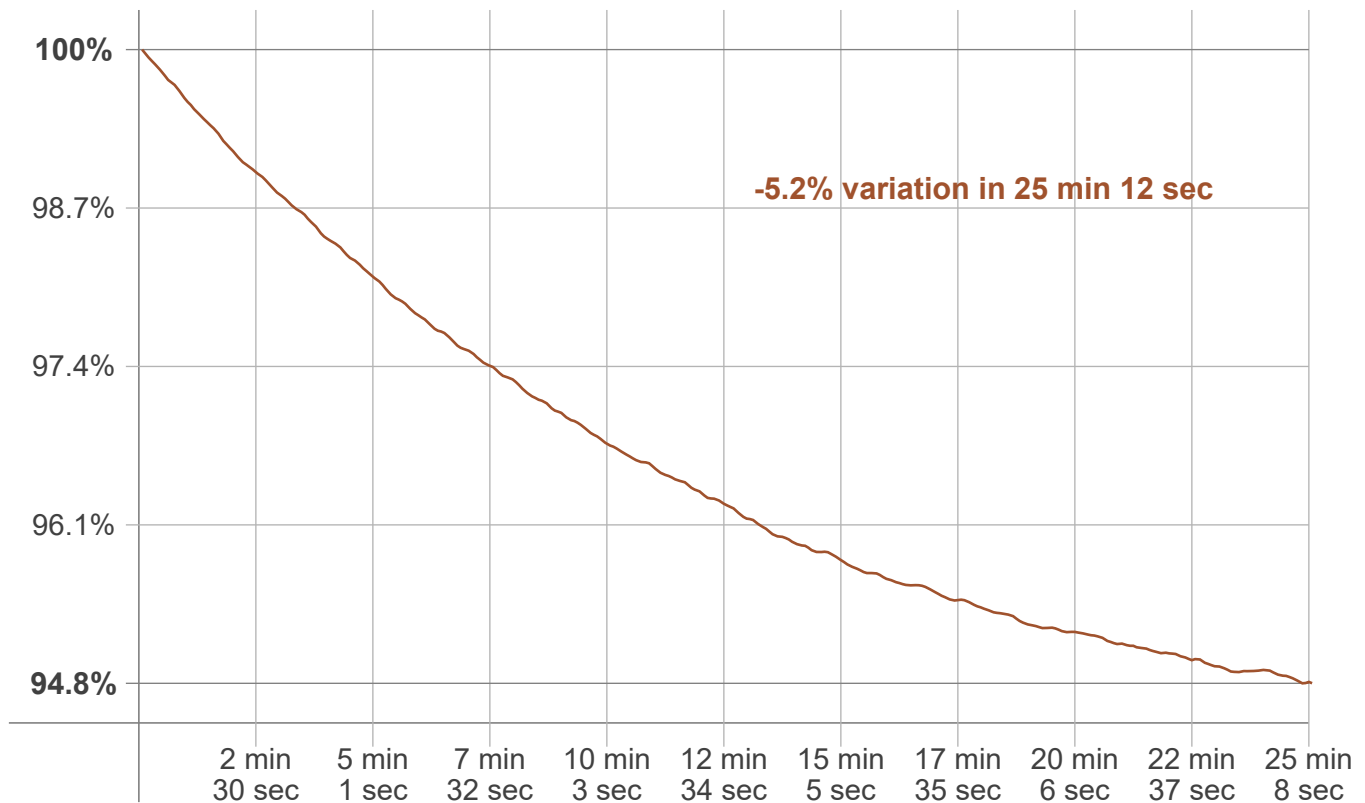

Warmup result

Warmup time:	Lamp stabilized in 25 min 12 sec
Warmup variation	-5.2%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5084 K	+71 K	5155 K


Output change

Output start	Output change	Output end
12171 lm	-581 lm	11589 lm




Flicker Specifications


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

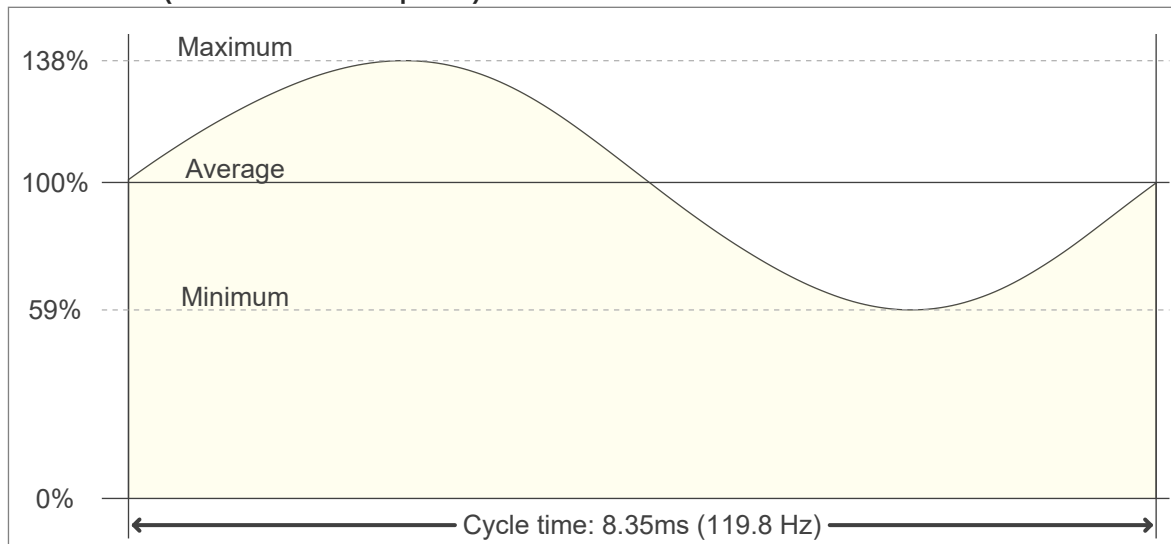

Flicker FFT (frequency scope of flicker curve)

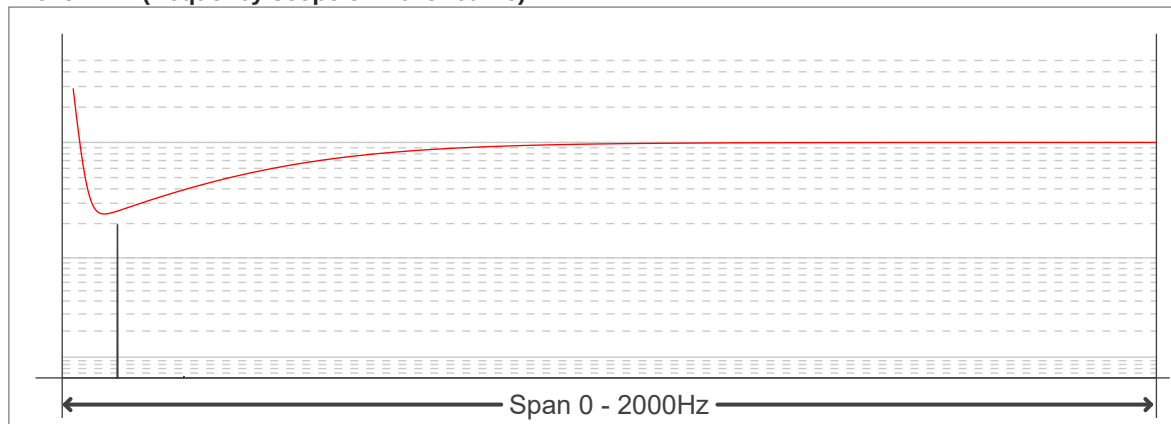

Flicker results:

Flicker frequency:	119.76 Hz
Flicker index:	0.12
Flicker percentage:	39.85 %
SVM: (Visual flicker)	1.42

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------

