

VTAJ Series

LED Vapor Tight Jelly Jar Specifications



VTAJ-50K20-G



Features

- 100-277 VAC
- L70 rated 50,000 hour lifetime
- IP65 rated, waterproof, suitable for wet locations
- 90°-180° adjustable for wall or ceiling mounting

Construction

- Durable plastic housing and cage
- Frosted polycarbonate lens

Warranty

Three (3) Year Warranty

Certifications and Compliances

These lights are Certified by UL in compliance with UL 1598 (IFAM).



Specifications

Model		VTAJ-50K20-x
Lumens		2,200 lm
Operating Voltage		100-277 VAC
Power Consumption		20 W
Current Draw	120 VAC	170 mA
Efficacy		110 lm/W
Color Temperature		5000K
Beam Angle		270°
CRI		80+
Dimming		none
IP Rating		IP65, waterproof
Ambient Operating Temperature		-40°-113° F (-40°-45° C)
Product Weight		2.2 lb (1.0 kg)
Rated Life (L70)		50,000 hours

Project _____

Date _____ Type _____

Available Models¹

- ☐ VTAJ-50K20-G
- ☐ VTAJ-50K20-O

Part Number Breakdown

Example: VTAJ-50K20-G

Series	Color Temperature	Wattage	Finish
VTAJ	50K [5000K]	20W [20 W]	G [Gray]
			O [Orange]


Application

Easily replaces inefficient metal-halide fixtures such as those found in warehouses, barns, tunnels, factories, food processing plants, and other commercial and industrial spaces.

Product Page QR Code



Dimensional Drawings

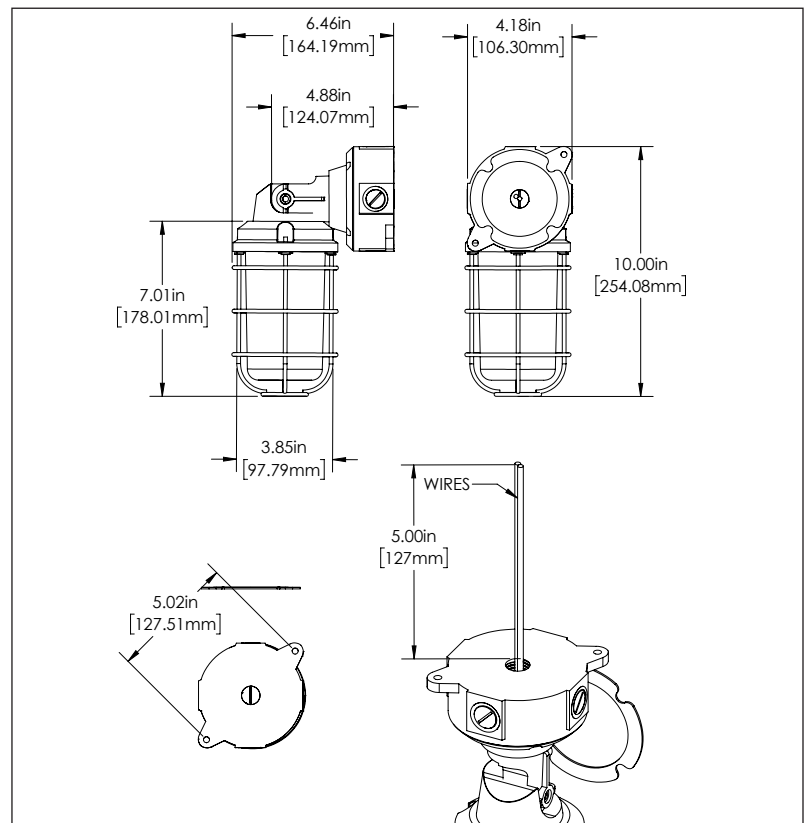

¹Contact customer service if interested in options other than those listed.



T 866.811.5550

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/cat/industrial-led-lighting/

Rev V1 Date: 03/06/2024

Specifications are subject to change without notice.

Printed in the U.S.A.