

Light efficiency:

149 Lumens/Watt

Light quality:

CRI: 83.3

Color temperature:


4157 K

Output: 5275 lm

Peak: 1779 cd

Power: 35.3 W

PF: 1.0

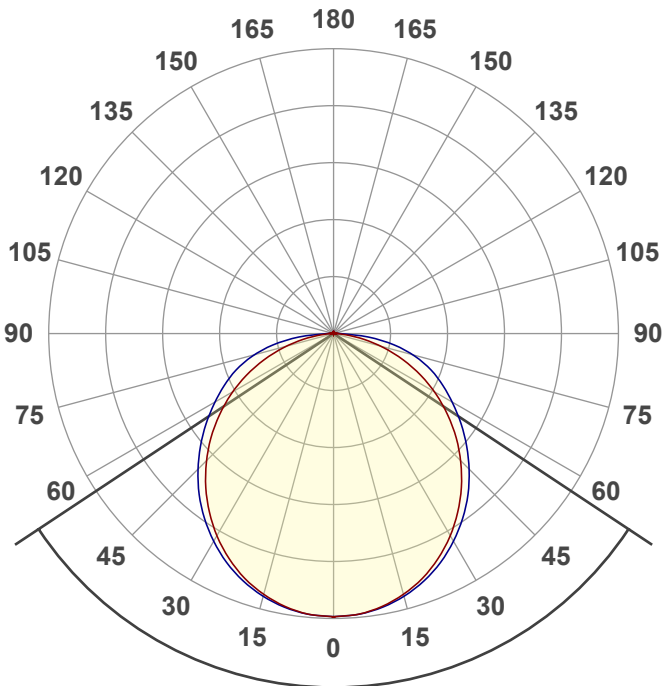

Product name:

TLFD-SW3C24-845 40K 38W

Date and time:

6/17/2024 11:37:08 AM

Beam angle

112.9°




CIE 1931


x: 0.374

y: 0.372

Spectra

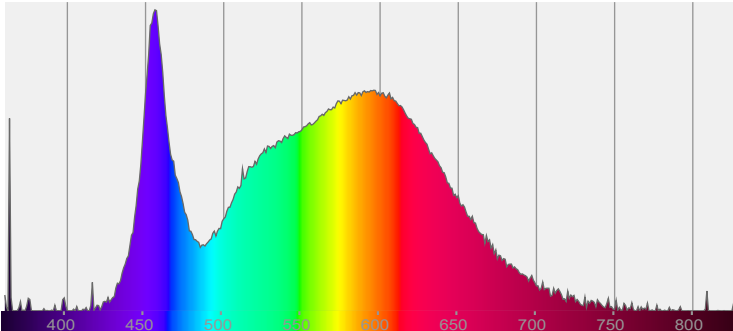

Power

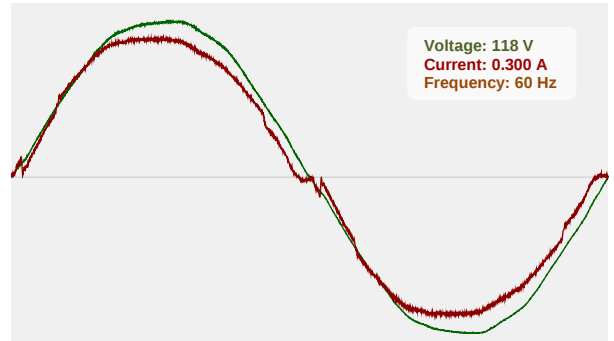



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

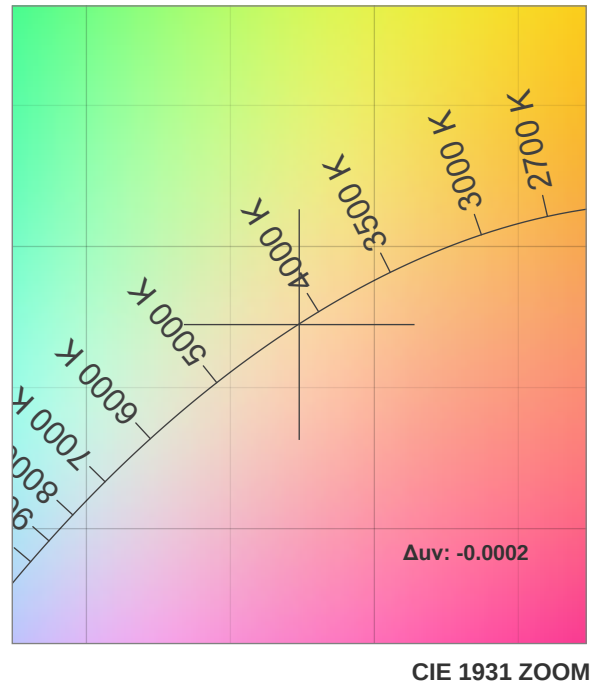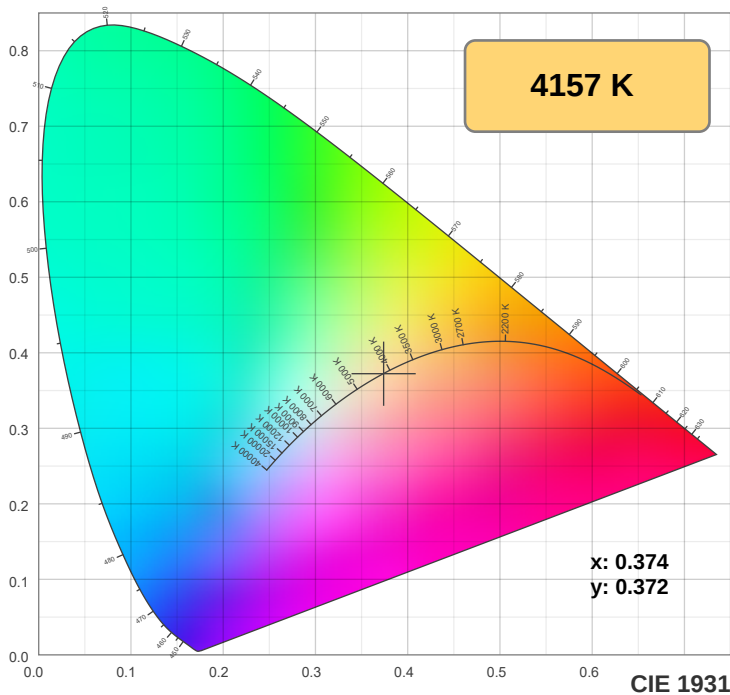

TM30: 82.3

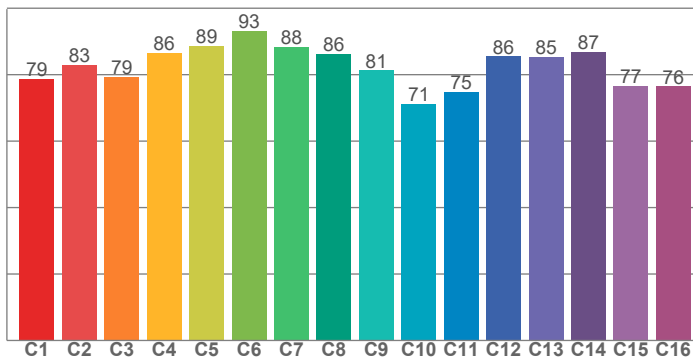

CRI: 83.3 (R1-R8)

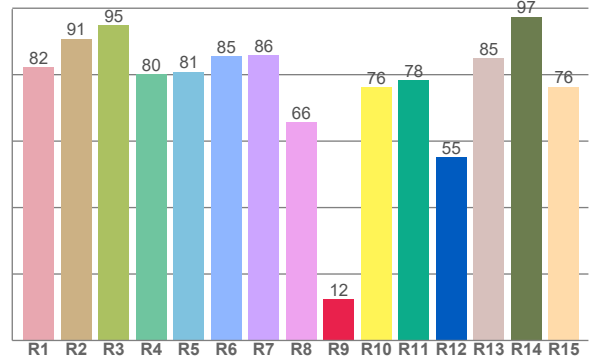

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82.3	90.8	94.9	80.2	80.9	85.5	85.9	65.7	12.4	76.2	78.3	55.2	84.9	97.4	76.4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78.7	82.9	79.4	86.5	88.7	93.1	88.3	86.2	81.3	71.2	74.9	85.5	85.3	86.8	76.7	76.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
80.8	97.4	77.4	70.7	76.1	79.2	83.9	88.0	97.3	88.7	84.4	83.3	83.1	72.9	76.2

CQS: 81.0

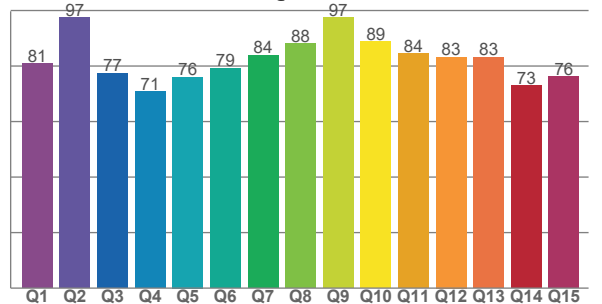

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4157 K	83.3	12.4	82.3	93.5	81.0	0.374	0.372	0.223	0.332	-0.0002



TM30 Report







Rf 82.3

Fidelity index Rf

Rg 93.5

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	79	-12%	1%
2	83	-7%	6%
3	79	-4%	10%
4	86	-2%	5%
5	89	-3%	3%
6	93	-1%	-2%
7	88	-7%	-1%
8	86	-8%	3%
9	81	-7%	12%
10	71	-6%	17%
11	75	4%	16%
12	86	6%	5%
13	85	8%	-8%
14	87	2%	-7%
15	77	-2%	-17%
16	76	-6%	-12%

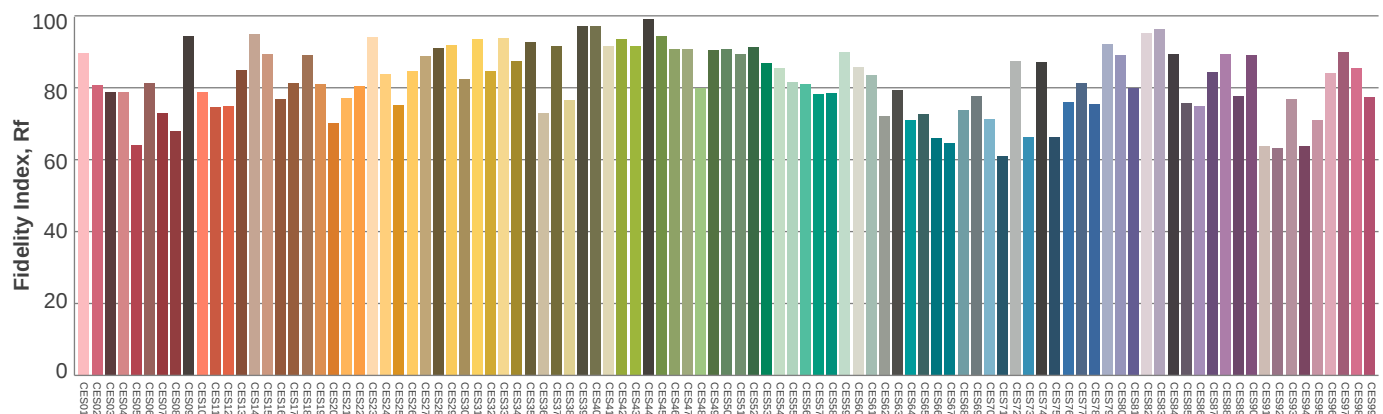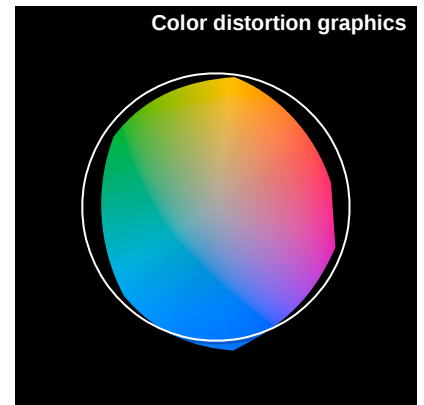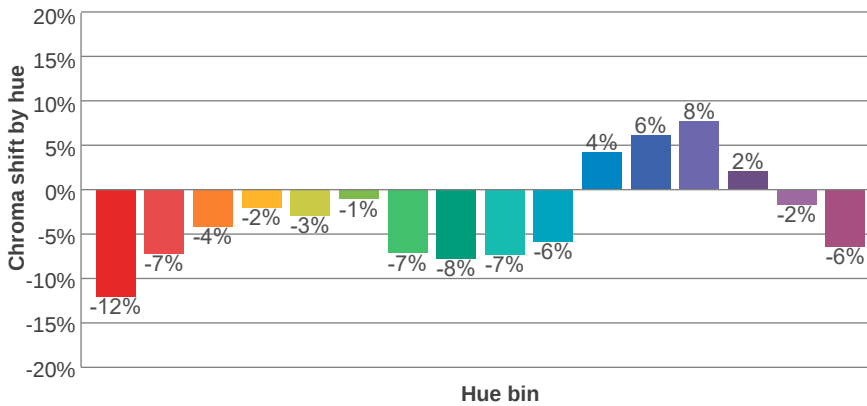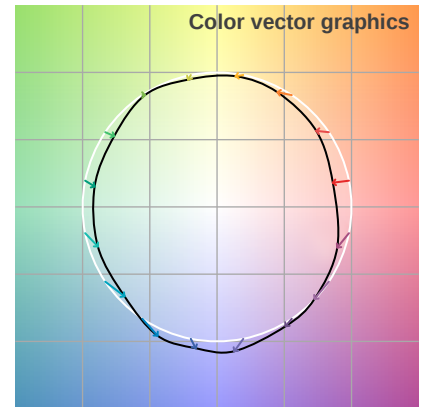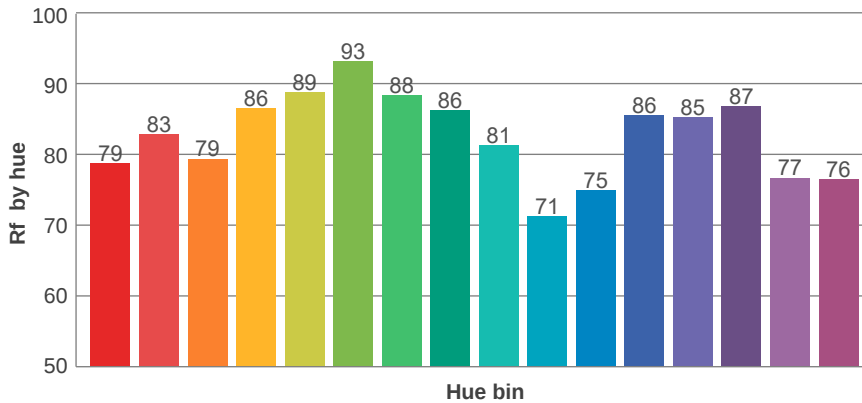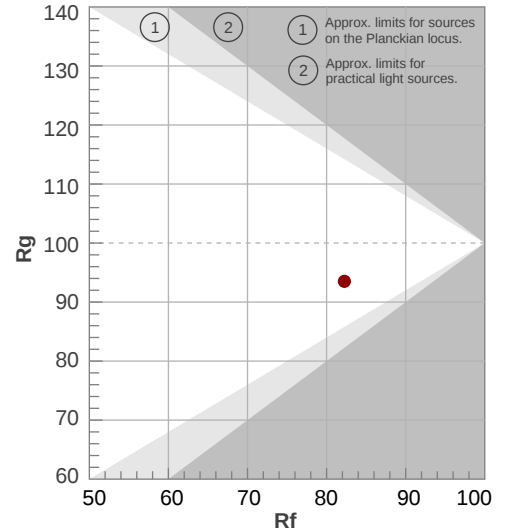

Color Evaluation Sample



Illumination

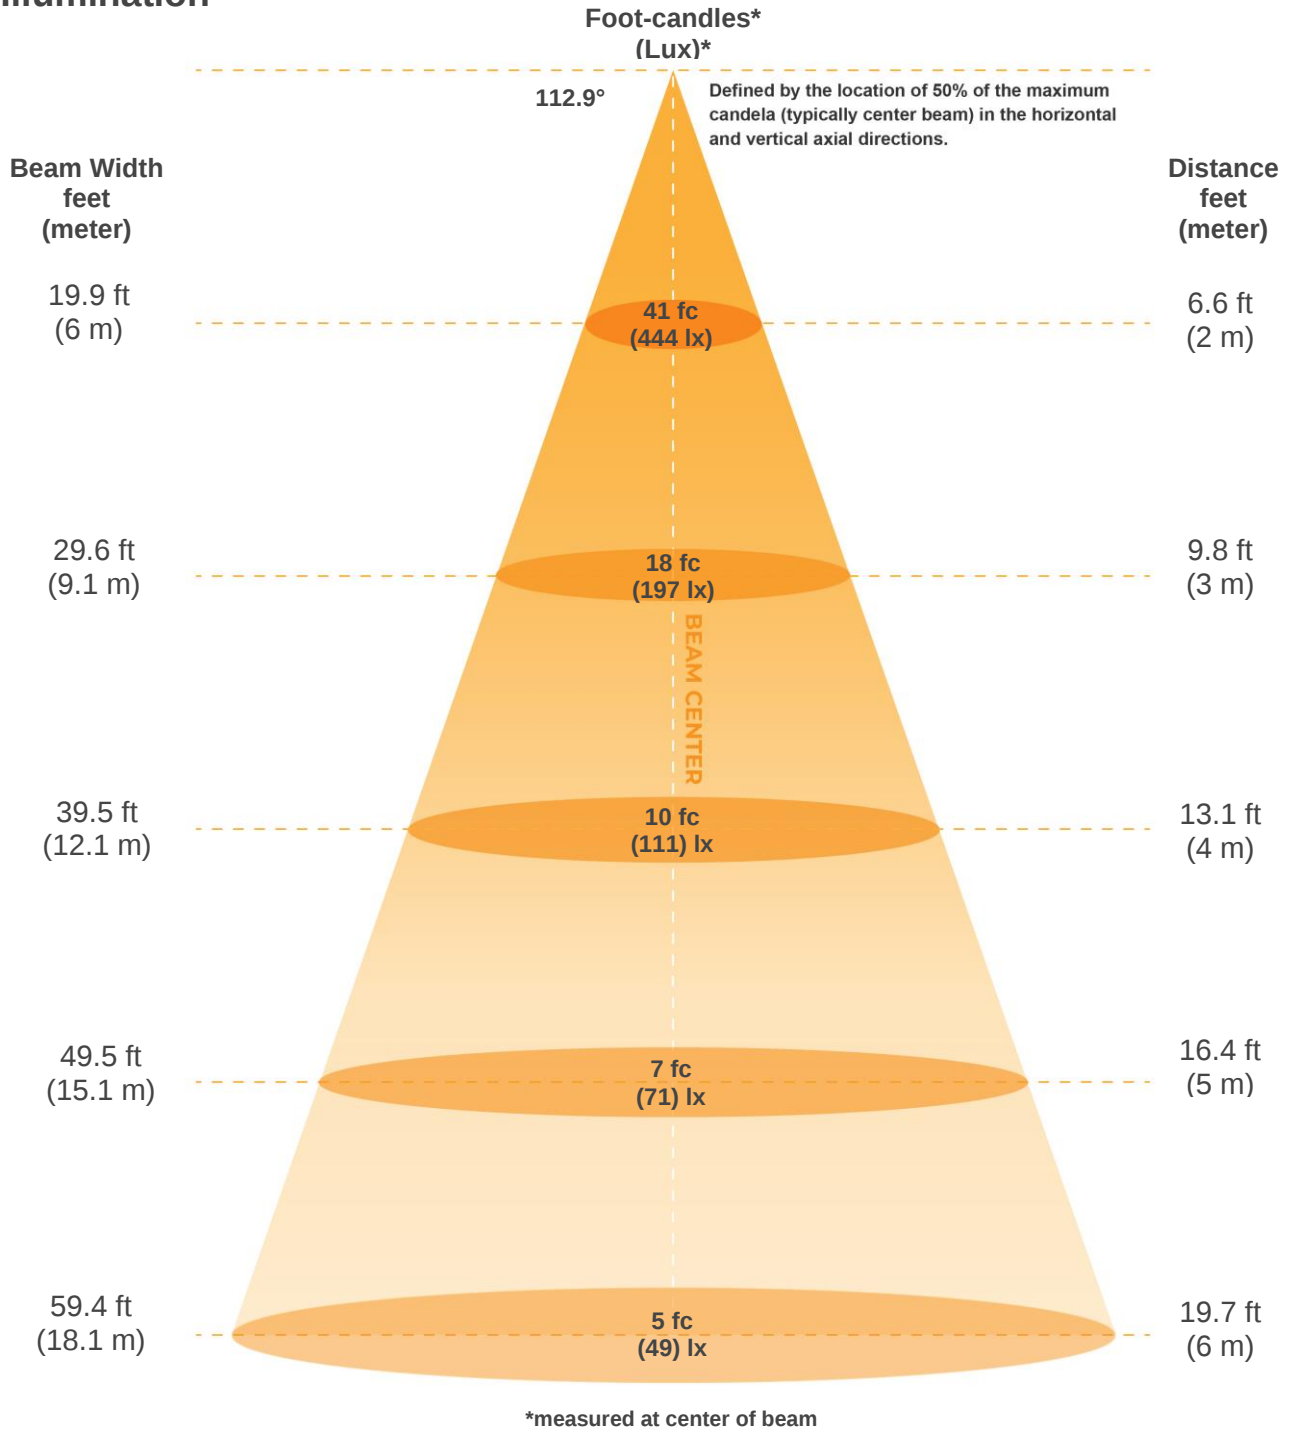


Beam intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lux	1776	444	197	111	71	49	36	28	22	18	15	12	11	9	8	7	6	5	5	4
fc	165	41.2	18.3	10.3	6.6	4.6	3.4	2.6	2	1.6	1.4	1.1	1	0.8	0.7	0.6	0.6	0.5	0.5	0.4

Beam angle 50%	Field angle 10%	Cutoff Angle 2.5%	Intensity Ratio in 120° cone	Intensity Ratio in 90° cone
112.9°	167.1°	177.8°	75.2%	51.1%




Iso-intensity Diagram (Iso-candela)

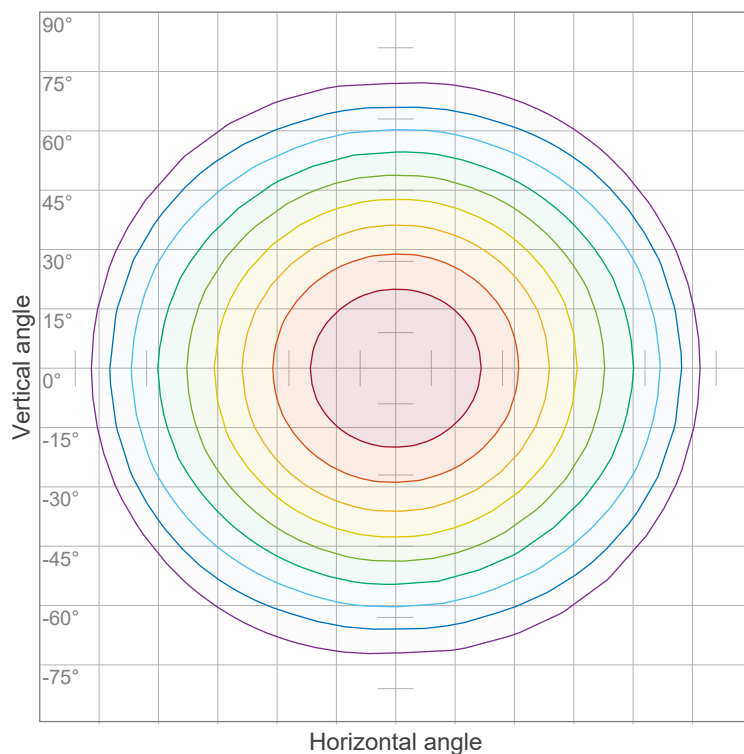

90 %	1601.0 cd
80 %	1423.1 cd
70 %	1245.3 cd
60 %	1067.4 cd
50 %	889.5 cd
40 %	711.6 cd
30 %	533.7 cd
20 %	355.8 cd
10 %	177.9 cd

Peak intensity: 1778.9 cd
Number of c-planes: 16

Iso-illuminance Diagram (Iso-lux)

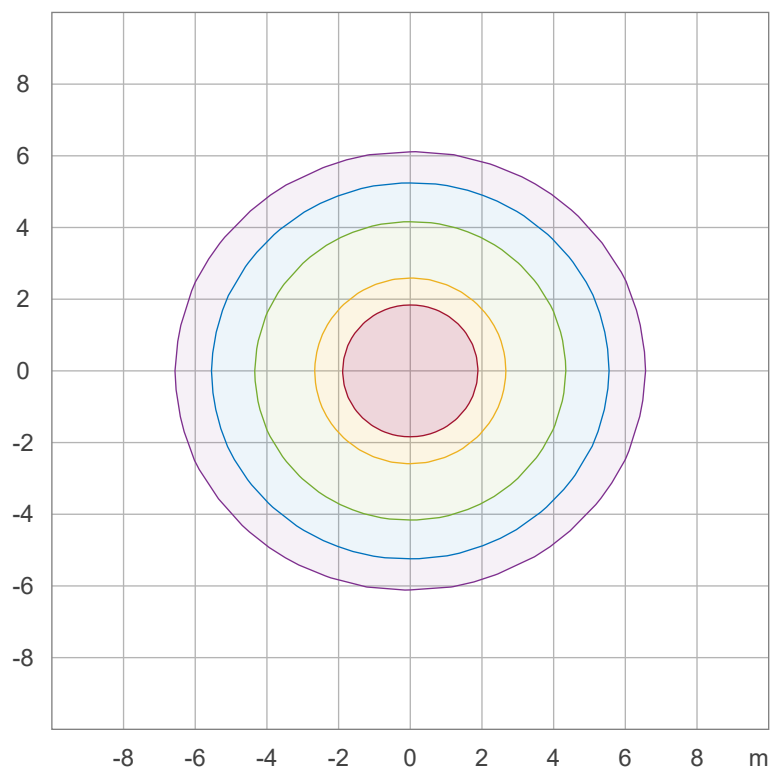

50.0 %	98.8 lx
30.0 %	59.3 lx
10.0 %	19.8 lx
5.0 %	9.9 lx
3.0 %	5.9 lx

Peak illuminance: 197.6 lx
Mounting height: 3.0 m
Number of c-planes: 16



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

[illegible]

UGR data could not be calculated due to missing/wrong symmetry. Goto Edit->Photometric->Corrections and select Correct asymmetry.

Coefficients of Utilization


Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR			(RCR: Room Cavity Ratio)															
Room Values are expressed as percentage of Lumen delivered to the task surface																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	103	98	94	105	100	96	92	96	92	89	92	89	86	88	86	84	81
2	98	89	82	76	95	87	80	75	83	78	73	80	75	71	77	73	69	67
3	89	78	69	63	86	76	68	62	73	66	61	70	64	60	67	63	58	56
4	81	69	60	53	79	67	59	52	65	57	52	62	56	51	60	55	50	48
5	75	61	52	45	72	60	52	45	58	50	44	56	49	44	54	48	43	41
6	69	55	46	40	67	54	46	39	52	45	39	51	44	38	49	43	38	36
7	64	50	41	35	62	49	41	35	48	40	34	46	39	34	45	38	34	32
8	59	46	37	31	58	45	37	31	43	36	31	42	35	30	41	35	30	28
9	55	42	34	28	54	41	33	28	40	33	28	39	32	27	38	32	27	25
10	52	39	31	25	51	38	30	25	37	30	25	36	30	25	35	29	25	23



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

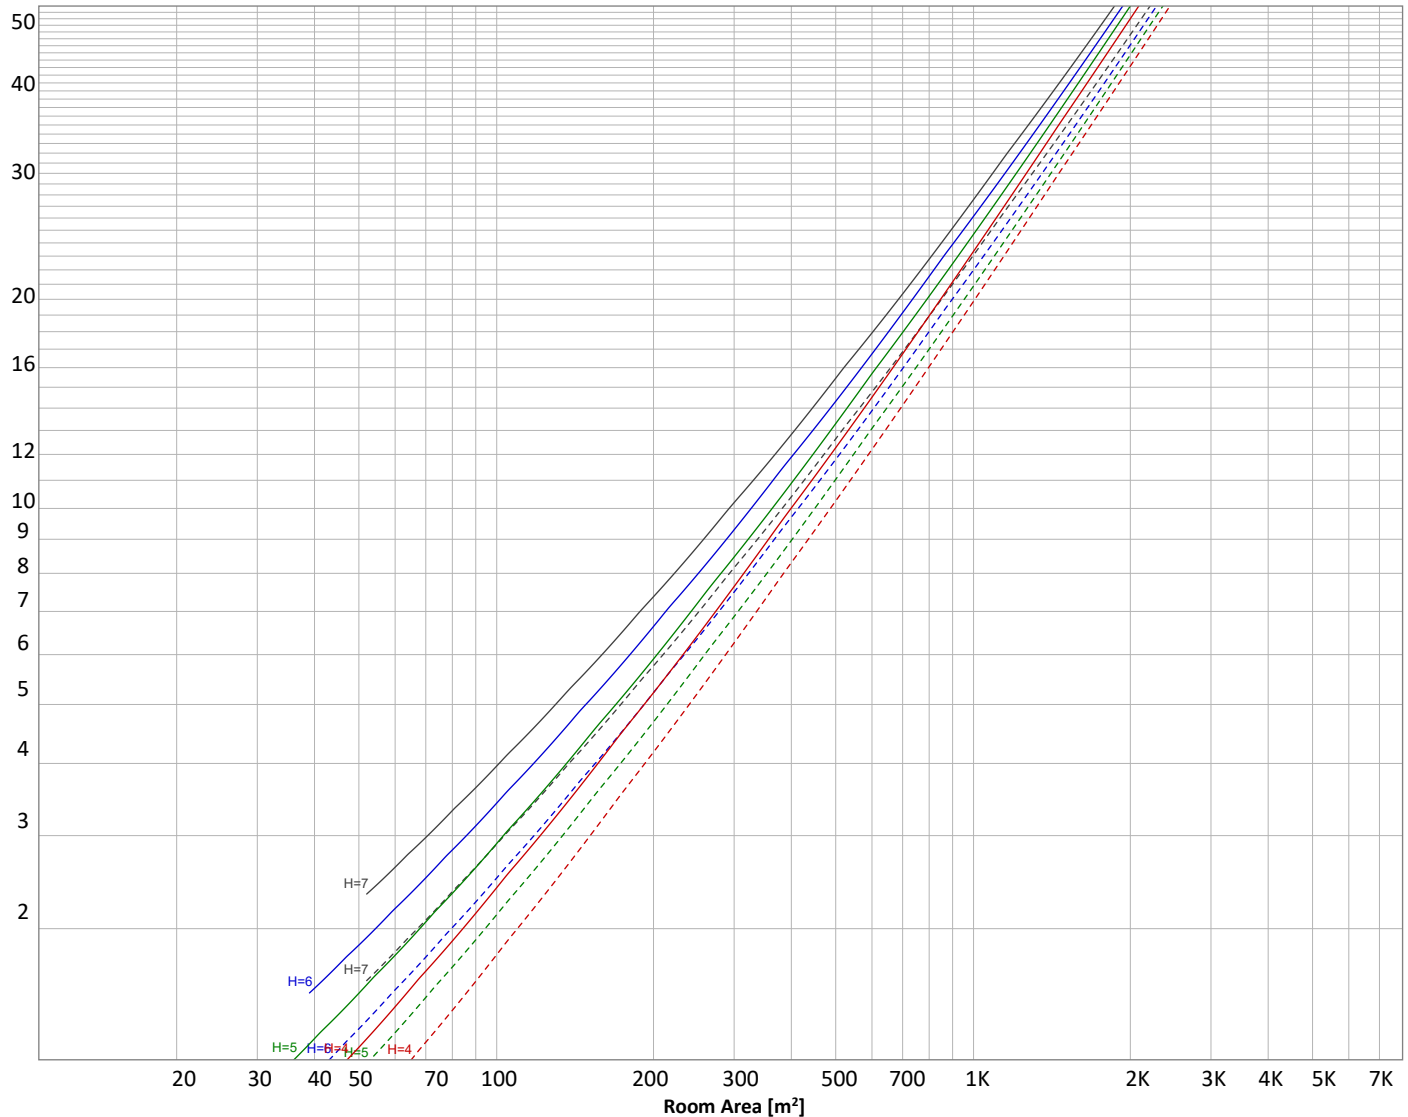

Conditions

H = Room height	Flux = 5275 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	_____	50	30
				Floor reflectance
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
168 lm	480 lm	724 lm	869 lm	900 lm	825 lm	665 lm	442 lm	163 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
11.2 lm	4.97 lm	5.16 lm	4.80 lm	4.44 lm	3.89 lm	2.97 lm	1.89 lm	0.632 lm




Power Details

Input Power

Power feed to light source	35.3 W
Frequency of input power	60 Hz
RMS Input voltage feed, V_{RMS}	118 V
RMS Input current feed, I_{RMS}	0.300 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	35.45 VA
Displacement factor of AC power feed	1.0
Power factor of AC current feed	1.0
Total harmonic distortion of the current	6.22%
Total harmonic distortion of the voltage	1.93%

Input Power Curve

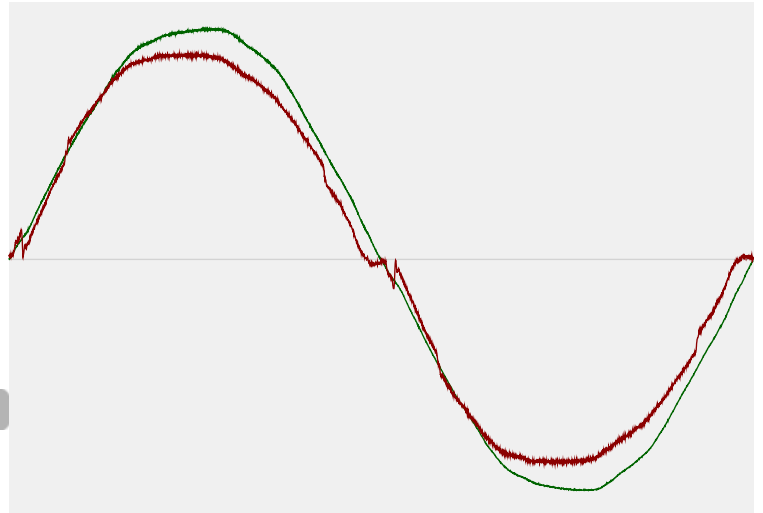

Efficiency

Radiated power efficiency 45.6%



Lumen efficiency 149 lm/W



Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2.0%
Minimum time	15 min

Color Temperature Change

CCT start	4150 K
CCT shift	+7 K
CCT end	4157 K


Warmup Result

Total warmup time	Not completed
Warmup variation	-2.6%

Output Change

Output start	5345 lm
Output change	-70 lm
Output end	5275 lm

Stabilization Curve

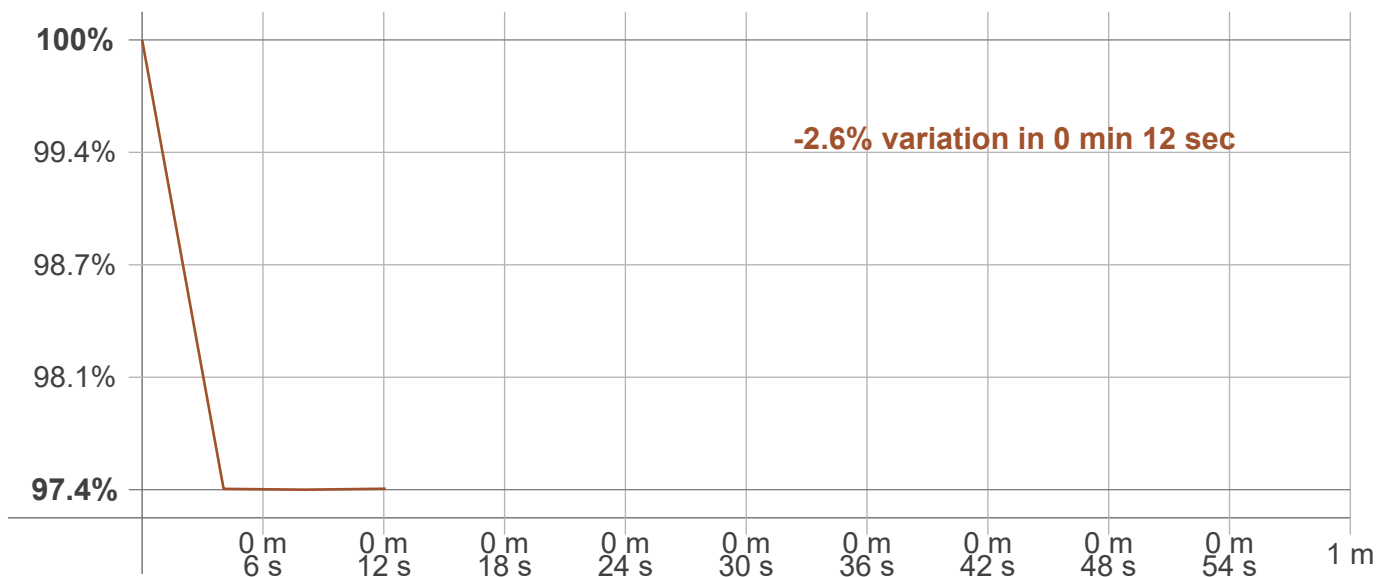

Flicker /TLA details



T 314.743.3067
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/

Flicker Meter Type Viso Systems LabFlicker
Frequency of input power 60 Hz
Flicker/TLA sample rate 20000 samples/s

Measurement time
PstLM 180 sec
All other indices 1.2 sec

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency 119.76 Hz
Percent Flicker 20.02 %
Flicker index 0.06

Flicker indices per California Energy Commission (CEC) 2016b

JA8/10 40 Hz 1.25 %
JA8/10 90 Hz 3.89 %
JA8/10 200 Hz 20.53 %
JA8/10 400 Hz 20.17 %
JA8/10 1000 Hz 20.02 %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value ($F < 80$ Hz) 0.15
SVM value ($80 < F < 2000$ Hz) 0.72


Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp 0.22

Flicker frame (frame of one flicker period in time domain)

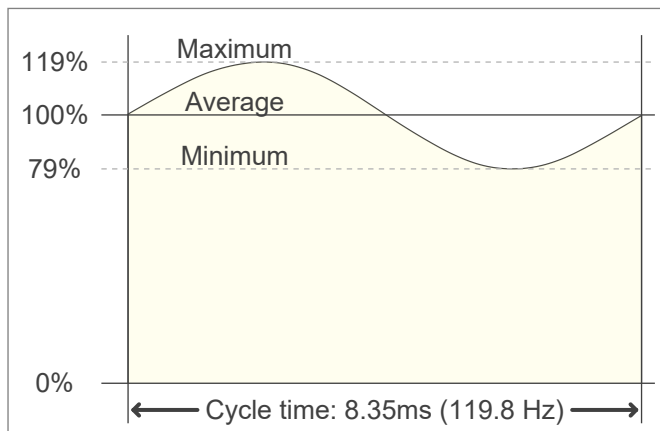

Flicker FFT (flicker curve in frequency domain)

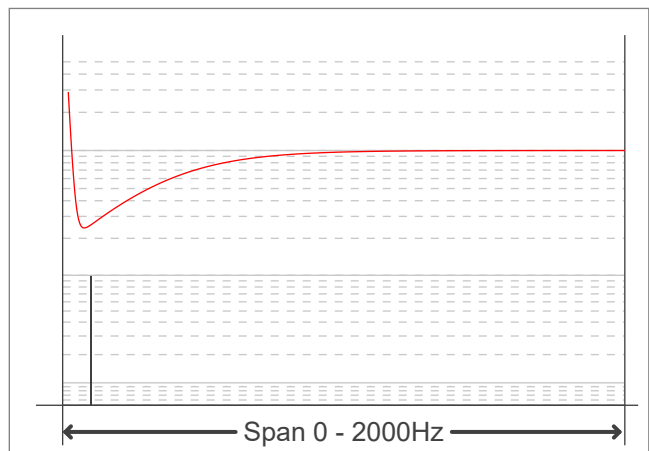

IEEE 1789 Frequency/modulation plot

