

Light efficiency:

146 Lumen/Watt

Light quality:

CRI: 84.1

Color temperature:

5052 K

Output: 14430 lm

Peak: 8284 cd

Power: 99.0 W


PF: 1.0

Product name:

WPGL-50K100-H

Date and time:

5/19/2021 2:01:40 PM

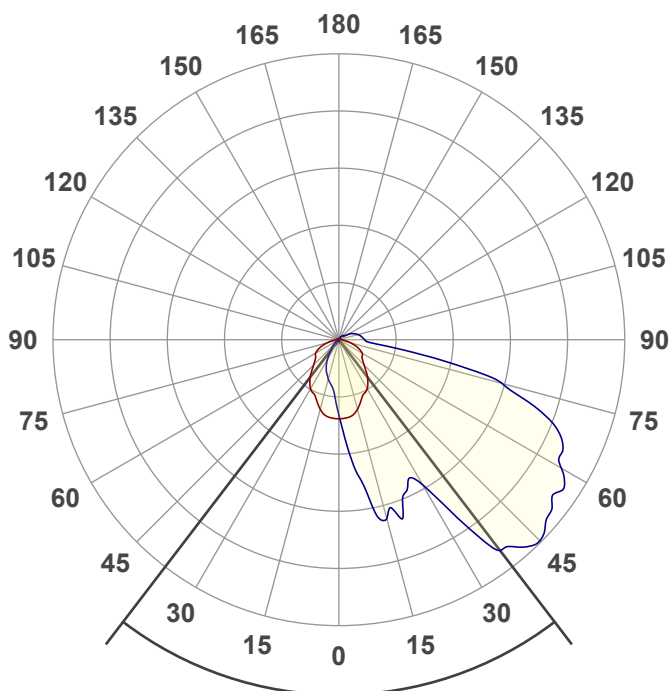

Beam angle

74.8°




CIE 1931


x: 0.344

y: 0.356

Spectra

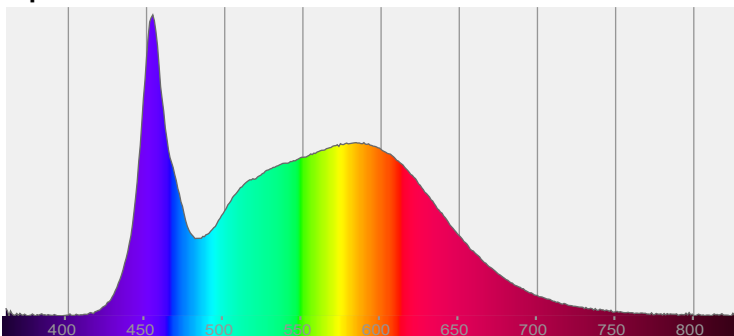

Power

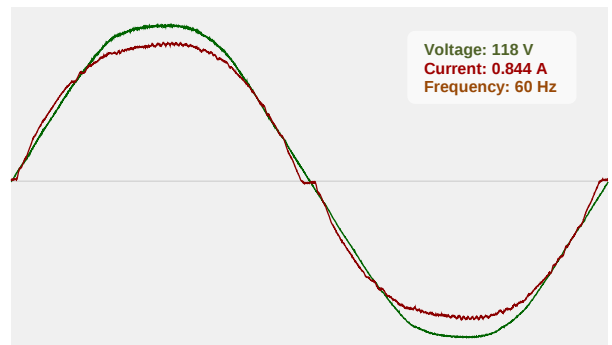



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

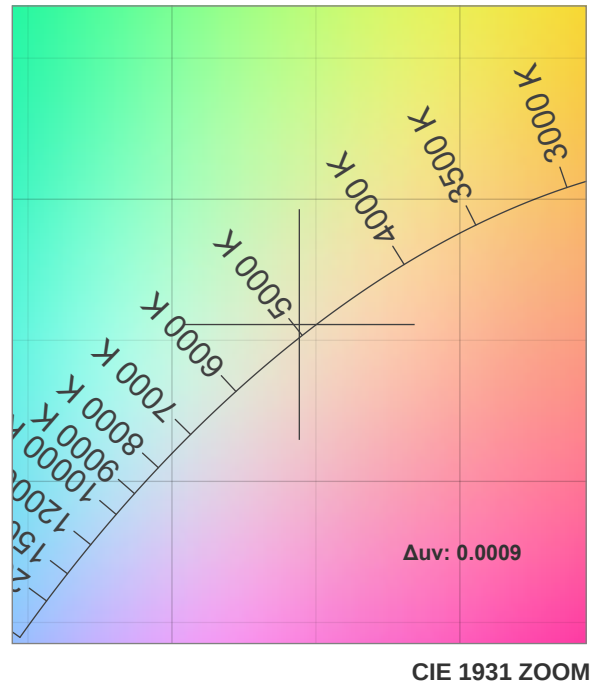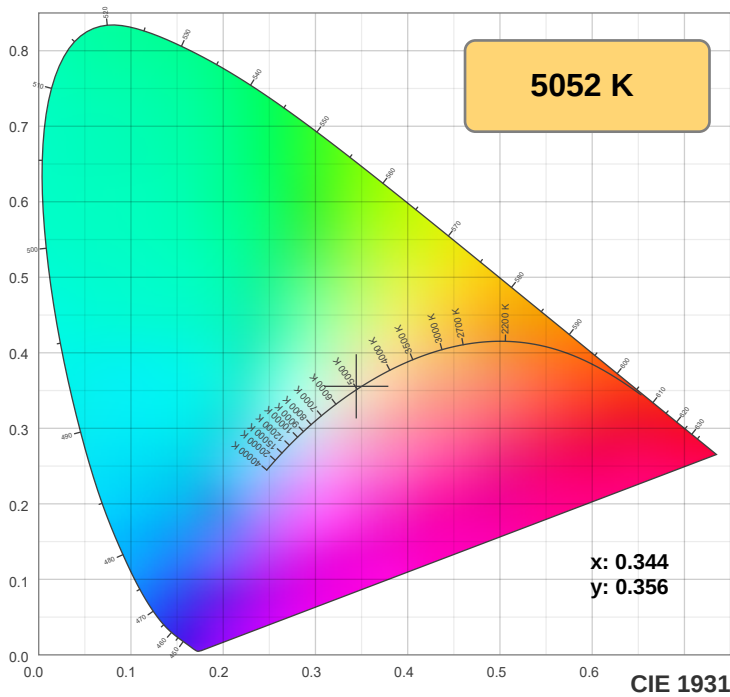

TM30: 83.9

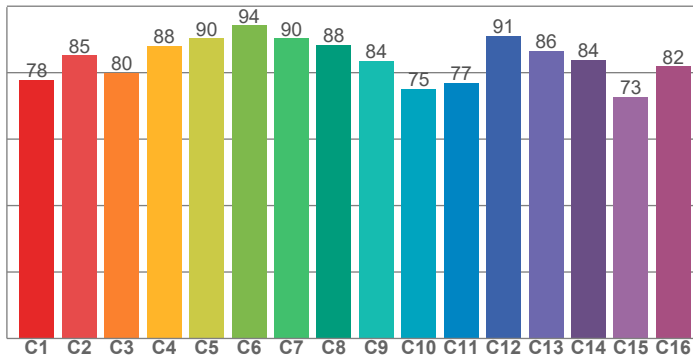

CRI: 84.1 (R1-R8)

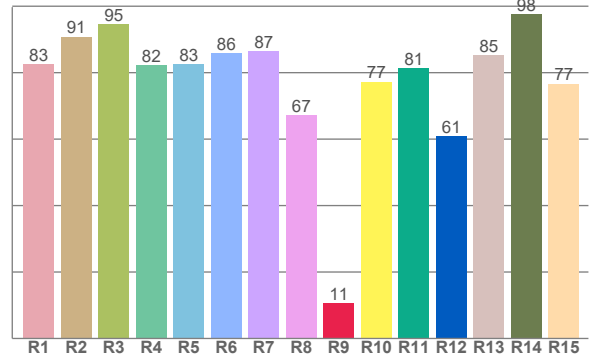

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82.6	90.8	94.6	82.2	82.6	85.9	86.5	67.2	10.6	77.3	81.4	60.9	85.2	97.5	76.7


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
77.8	85.2	80.0	88.0	90.3	94.2	90.3	88.3	83.6	75.1	76.9	91.1	86.5	83.9	72.8	81.9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
81.6	98.3	78.5	73.1	78.4	81.4	85.3	89.0	97.5	88.5	83.8	82.1	81.7	71.3	75.3

CQS: 81.4

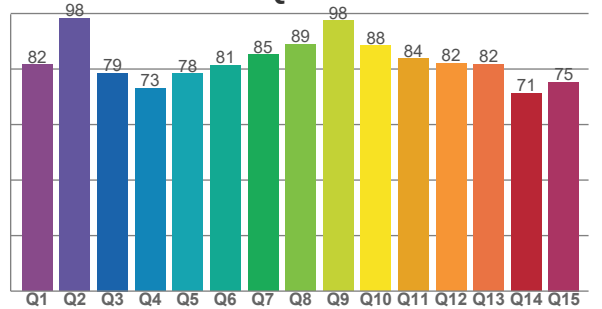

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5052 K	84.1	10.6	83.9	94.5	81.4	0.344	0.356	0.209	0.324	0.0009



TM30 Report







Rf 83.9

Fidelity index Rf


Rg 94.5

Gamut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	78	-12%	1%
2	85	-7%	5%
3	80	-4%	10%
4	88	-1%	5%
5	90	-2%	3%
6	94	0%	-2%
7	90	-6%	-2%
8	88	-7%	2%
9	84	-8%	10%
10	75	-4%	15%
11	77	3%	14%
12	91	5%	2%
13	86	7%	-8%
14	84	2%	-9%
15	73	2%	-23%
16	82	-7%	-8%

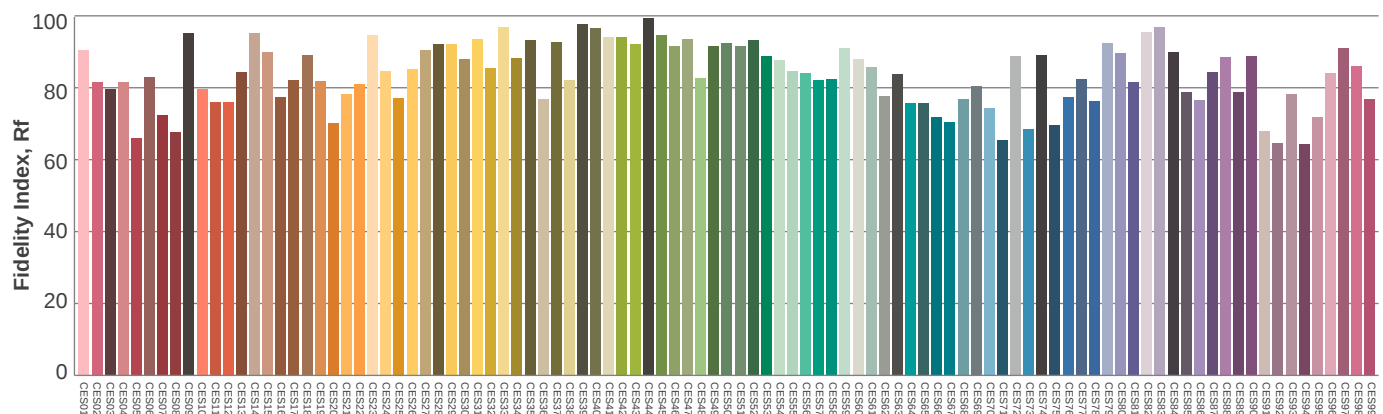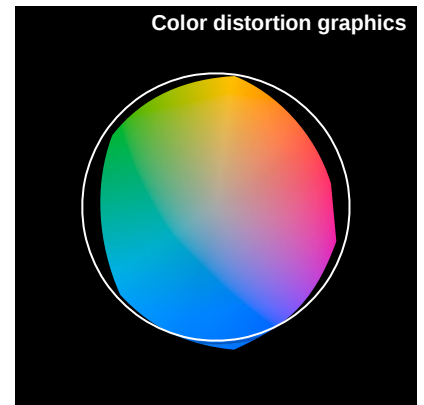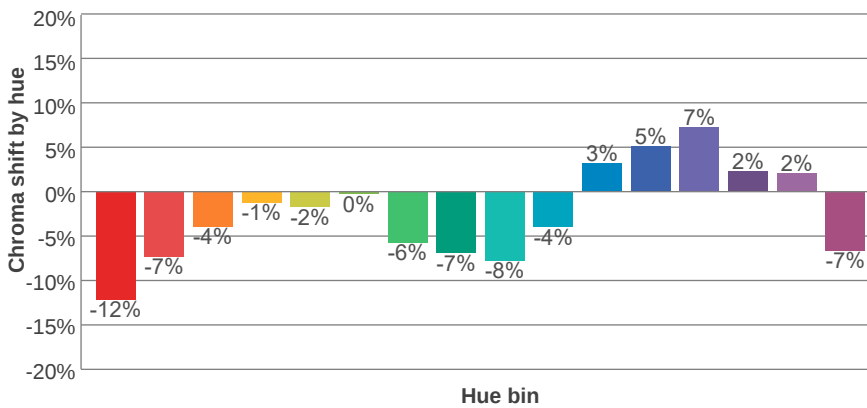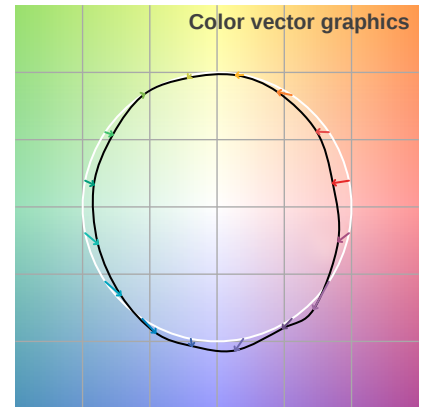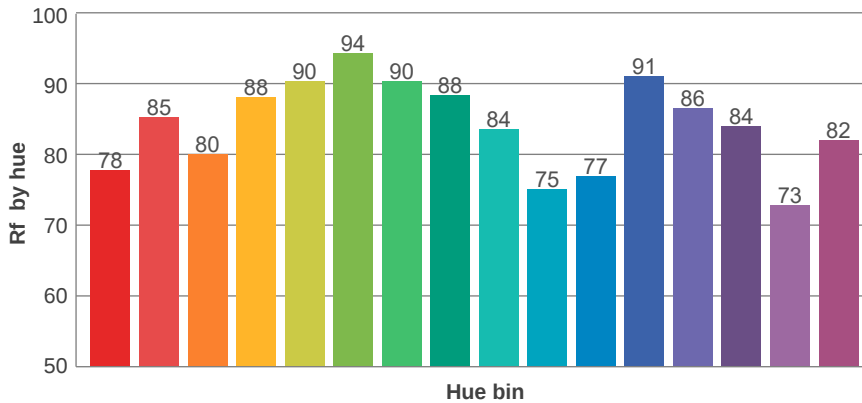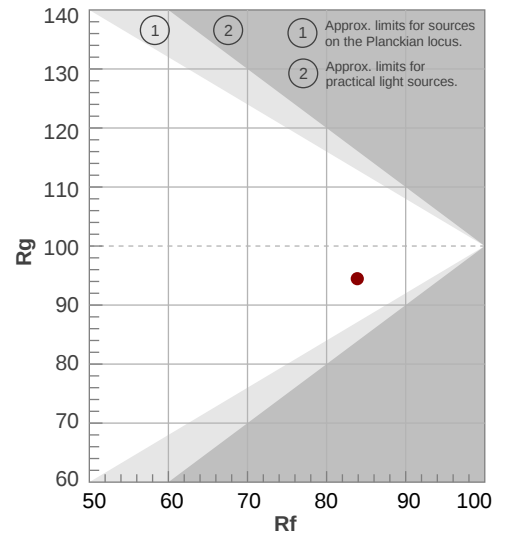

Illumination

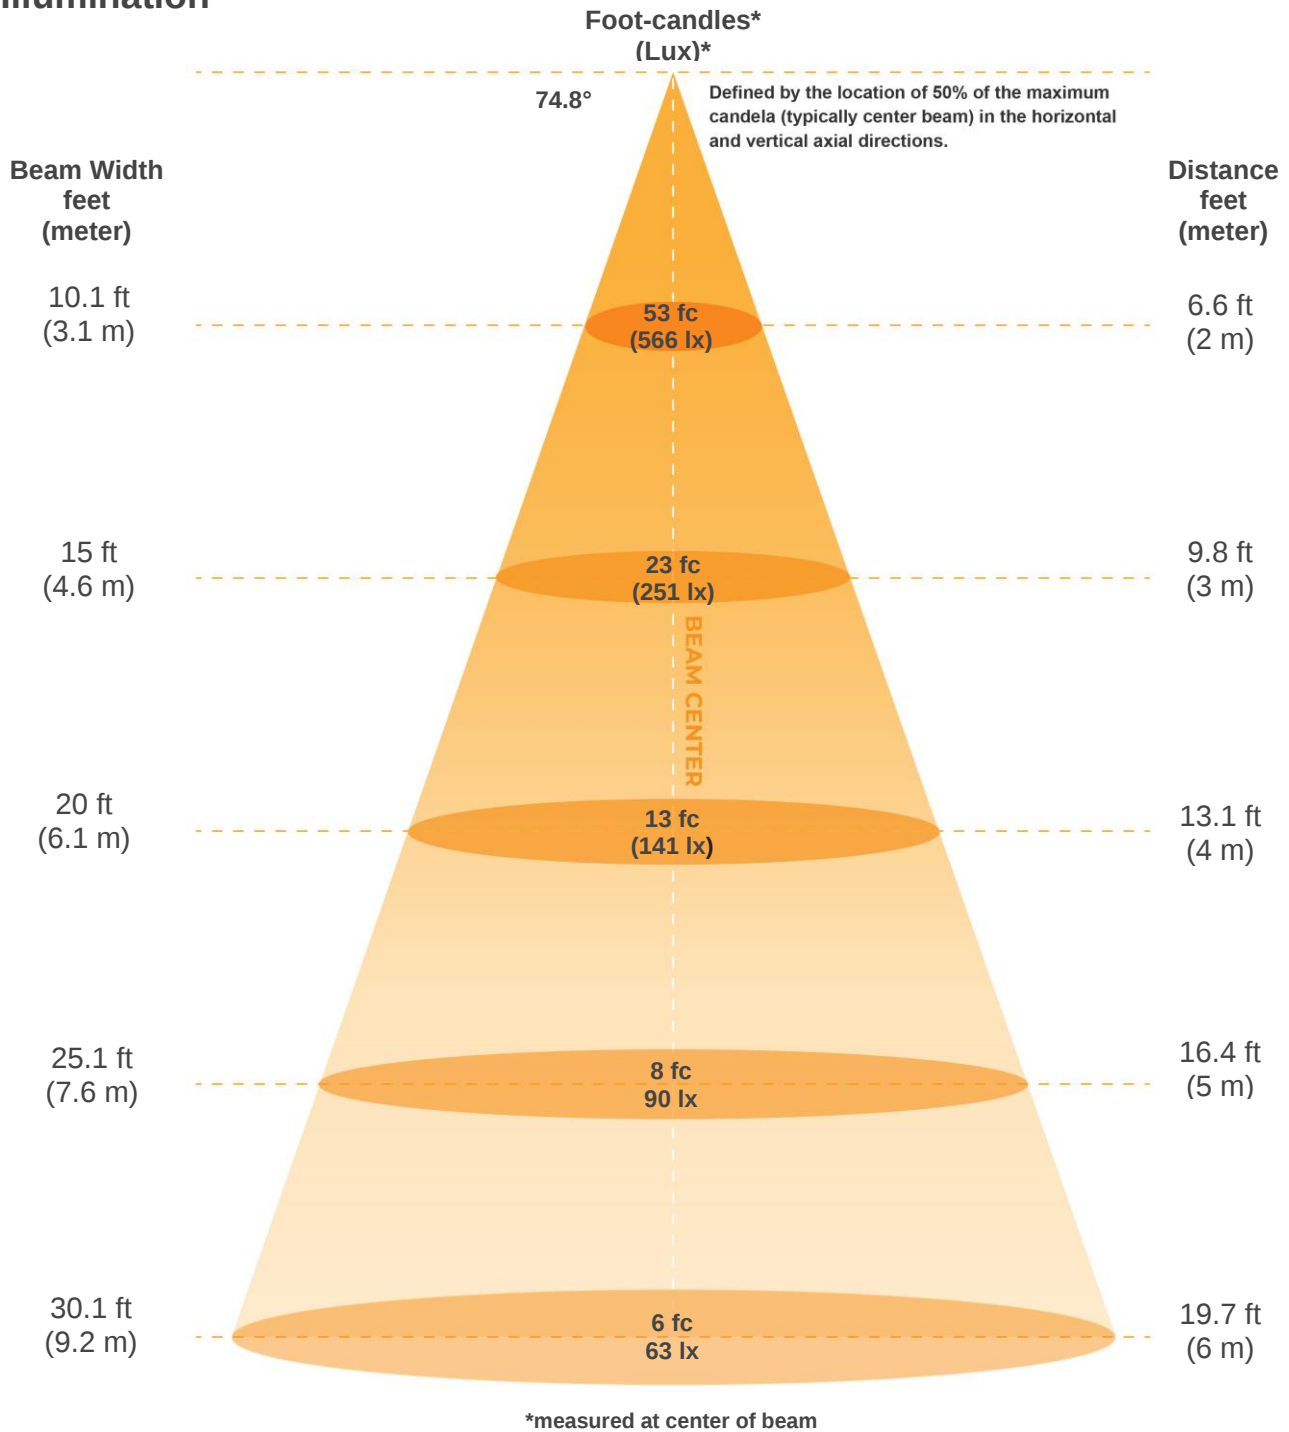

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2262lx	566lx	251lx	141lx	90lx	63lx	46lx	35lx	28lx	23lx	19lx	16lx	13lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx
210.2fc	52.5fcd	23.4fcd	13.1fcd	8.4fcd	5.8fcd	4.3fcd	3.3fcd	2.6fcd	2.1fcd	1.7fcd	1.5fcd	1.2fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.6fcd	0.5fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74.8°	135.3°	194.8°	60.6%	34.7%



ISO Diagrams

ISO candela diagram

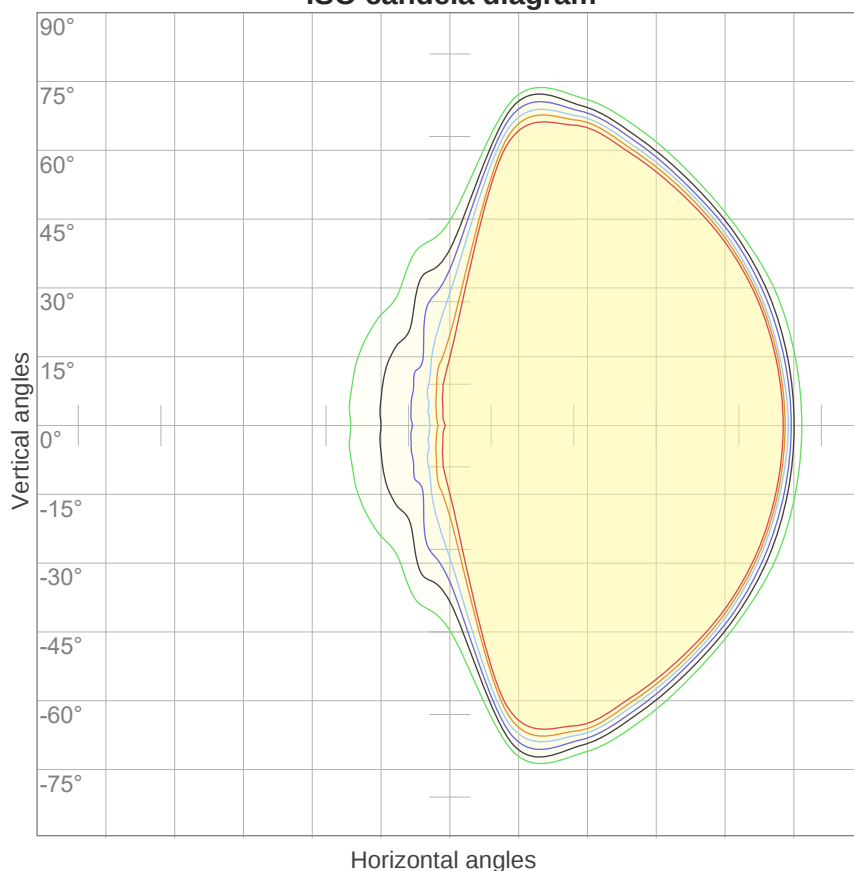


10%	226 cd
20%	452 cd
30%	679 cd
40%	905 cd
50%	1131 cd
60%	1357 cd
70%	1584 cd
80%	1810 cd
90%	2036 cd

Conditions:

Number of c-planes: 16

Candela at center: 2262 cd

ISO lux diagram

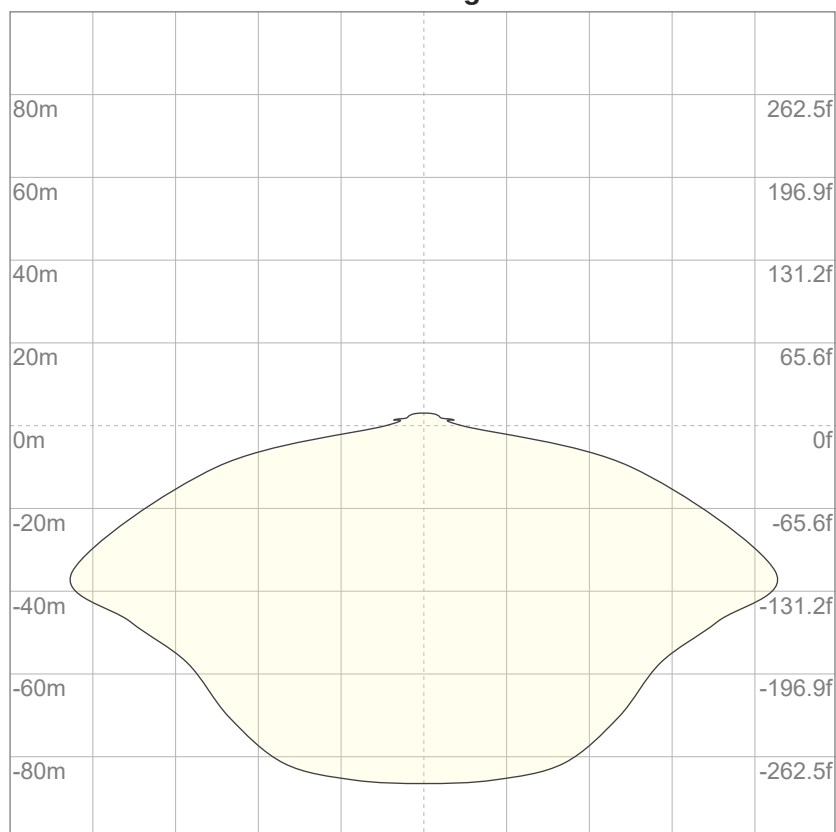

3%	0.679 lx
5%	1.13 lx
10%	2.26 lx
30%	6.79 lx
50%	11.3 lx

Conditions:

Number of c-planes: 16

Lux at center: 22.6 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	118	118	118	118	114	114	114	114	108	108	108	102	102	102	97	97	97	94
1	105	99	94	89	101	96	91	87	91	87	83	86	82	80	81	79	76	73
2	93	83	75	68	90	81	74	67	76	70	65	72	67	62	68	64	60	57
3	84	71	62	54	80	69	60	53	65	58	52	62	55	50	58	53	48	46
4	76	62	52	44	73	60	51	43	57	49	42	54	47	41	51	45	40	37
5	69	54	44	37	66	53	43	36	50	42	35	47	40	34	45	38	33	31
6	63	48	38	31	61	47	38	31	44	36	30	42	35	29	40	33	28	26
7	58	43	34	27	56	42	33	26	40	32	26	38	31	25	36	30	25	22
8	54	39	30	23	52	38	29	23	36	28	23	34	27	22	33	26	22	19
9	50	35	27	21	48	35	26	20	33	25	20	31	25	20	30	24	19	17
10	47	32	24	18	45	32	24	18	30	23	18	29	22	17	28	22	17	15

LAMPS (number of lamps)

Luminaire budgetary diagram

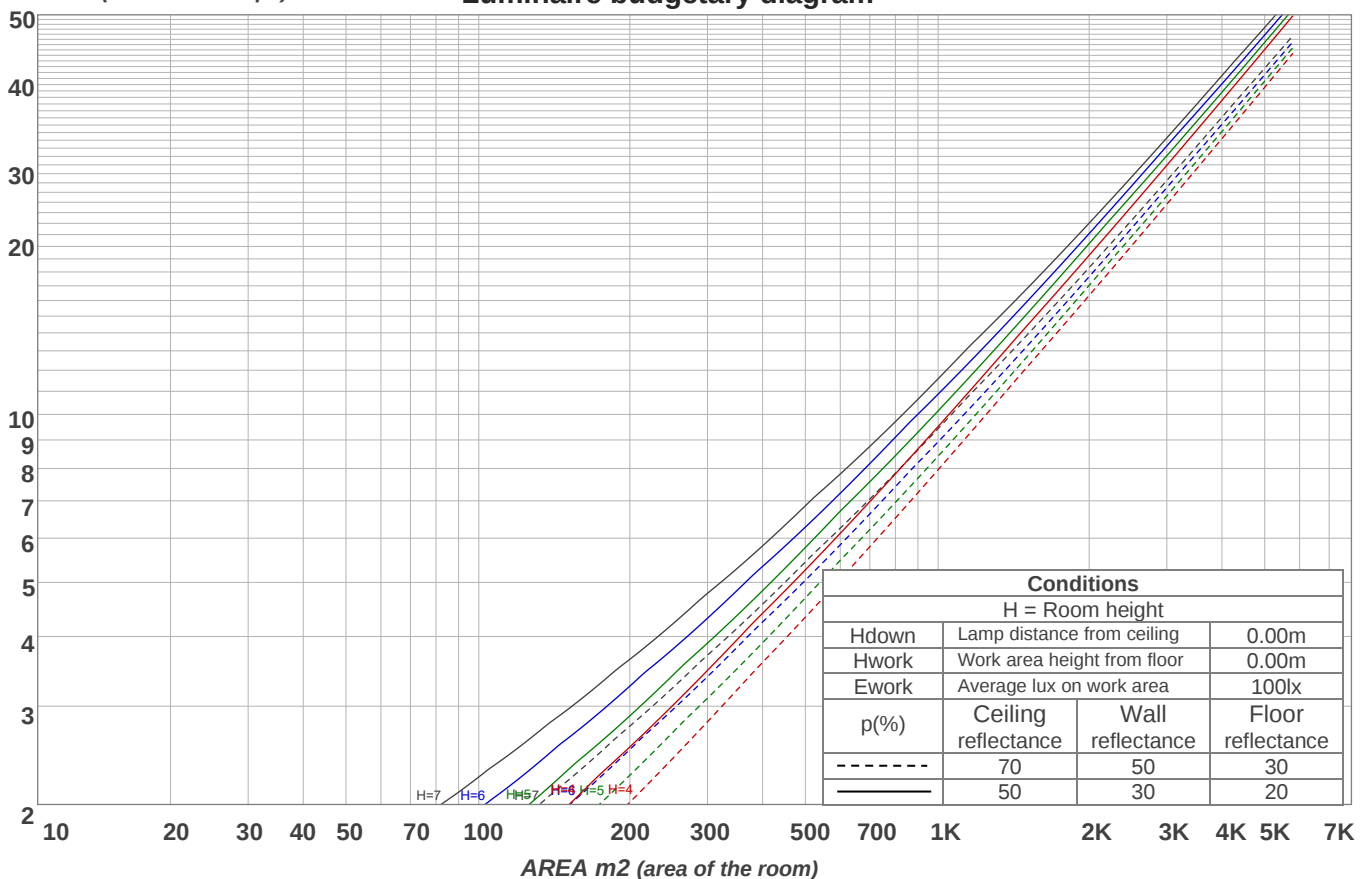


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
233 lm	790 lm	1221 lm	1691 lm	2265 lm	2550 lm	2540 lm	1781 lm	538 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
287 lm	214 lm	143 lm	85.8 lm	50.2 lm	26.2 lm	11.2 lm	3.31 lm	0.791 lm



Stabilization

Warmup curve

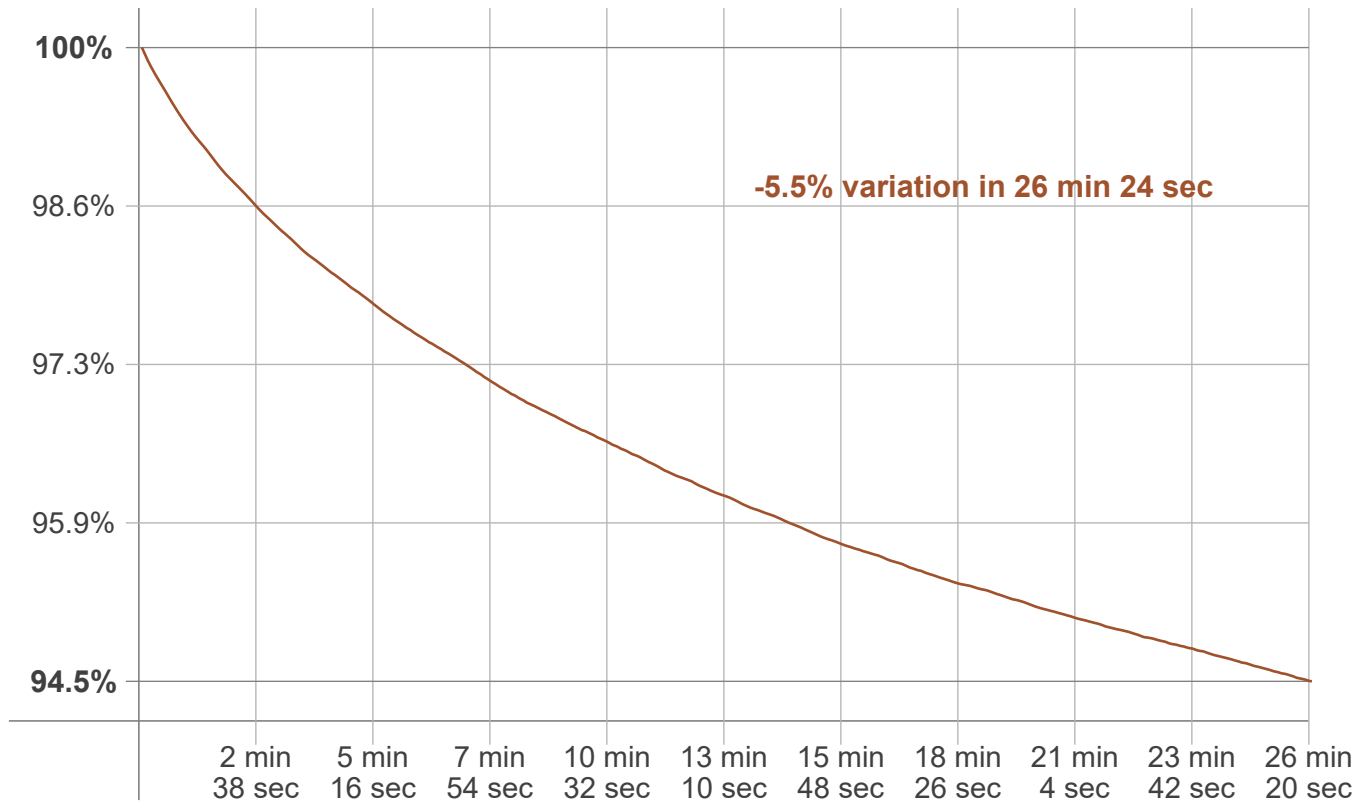

Warmup result

Warmup time:	Lamp stabilized in 26 min 24 sec
Warmup variation	-5.5%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
4961 K	+91 K	5052 K

Output change

Output start	Output change	Output end
15248 lm	-818 lm	14430 lm




Flicker Specifications


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

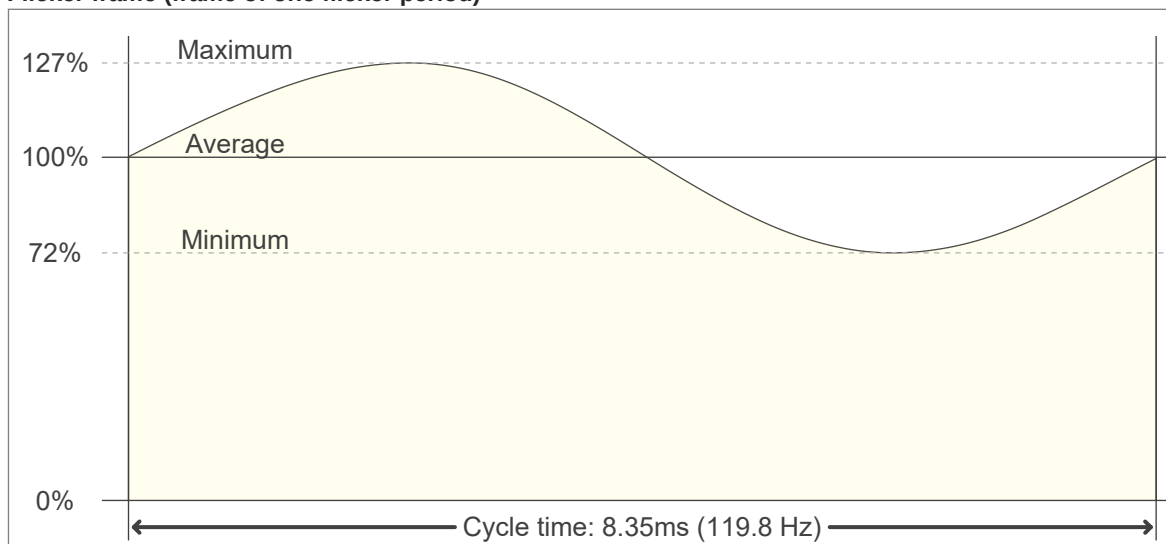

Flicker FFT (frequency scope of flicker curve)

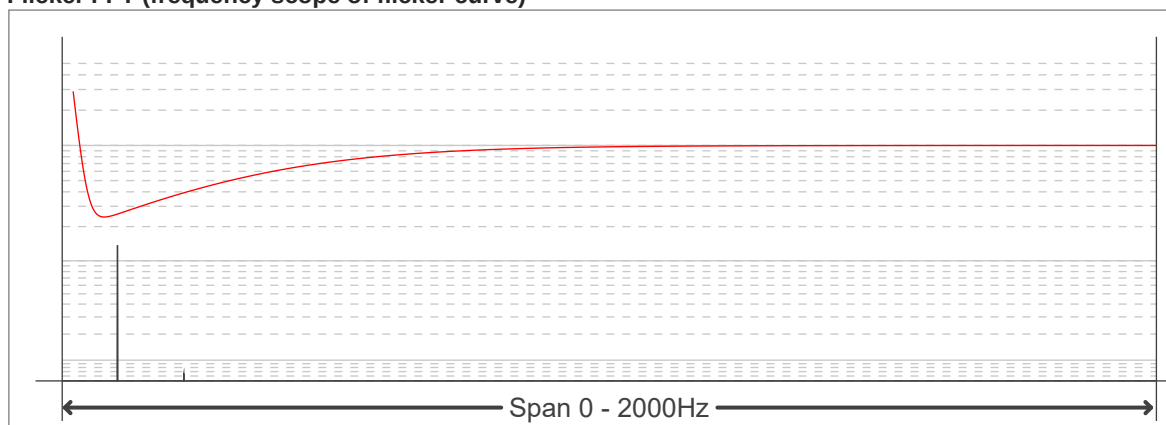

Flicker results:

Flicker frequency:	119.76 Hz
Flicker index:	0.09
Flicker percentage:	27.83 %
SVM: (Visual flicker)	1

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------

