

## Gooseneck Wall Light

Outdoor LED Barn Light Specifications

Project \_\_\_\_\_

Type \_\_\_\_\_ Date \_\_\_\_\_



**B350003-20W-4KBN**



### Available Models<sup>1</sup>

#### 9" Shade

- B350003-12W-3KBK
- B350003-12W-4KBK
- B350003-12W-3KBN

#### 15.6" Shade

- B350003-20W-3KBK
- B350003-20W-4KBK

### Part Number Breakdown

Example: B350003-12W-4KBK

Series	Wattage	CCT <sup>2</sup>	Finish <sup>2</sup>
B350003	12W [12 Watts]	3K [3000K] or 4K [4000K]	BK [Black] or BN [Bronze]
	20W [20 Watts]		

### Overview

LED gooseneck barn lights have a classic silhouette made to compliment both traditional and modern aesthetics, indoors or out. Timeless gooseneck design adds architectural appeal to restaurants, storefronts, patios, and more. Industrial style shade directs a wide, downward beam of energy-efficient light for entryways, garages, and perimeters. Integrated LEDs eliminate bulb replacement and are sealed against debris, bugs, and moisture. Powder coated steel construction gives a clean finish while protecting against harsh weather conditions.

3000K option is Dark Sky Friendly, minimizing light pollution and reducing blue light wavelengths in nighttime environments.

### Features

- Classic shaded gooseneck barn light design
- Ideal for commercial, retail, or residential applications
- Integrated LEDs eliminate bulb replacements
- Suitable for indoor or outdoor use
- Powder coated steel housing

### Product Details

- Wall mount to standard junction box
- IP65, Suitable for Wet Locations
- 50000 hour LED lifetime
- 18AWG pigtail wiring
- TRIAC dimmable
- 120 VAC input

### Certifications and Compliances

- ETL Listed - UL 1598



**Intertek**

### Applications

- Doorways
- Driveways
- Entryways
- Garages
- Patios
- Porches and Awnings
- Security Lighting
- Storefronts
- Wall Sconces

### Warranty

- 5-year warranty




<sup>1</sup>Contact customer service if interested in other options.  
<sup>2</sup>Subject to availability.

# Gooseneck Wall Light

Outdoor LED Barn Light Specifications

SPECIFICATIONS				
Model   B350003-	12W-3Kx	12W-4Kx	20W-3Kx	20W-4Kx
<b>PHOTOMETRIC</b>				
CCT	3000K	4000K	3000K	4000K
Lumens	900 Lumens		1500 Lumens	
Efficacy	75 lm/W			
Beam Angle	120°			
<b>ELECTRICAL</b>				
Wattage	12 Watts		20 Watts	
Current Draw	100 mA		170 mA	
Operating Voltage	120 VAC			
Power Factor	≥0.9			
Dimmer Type	TRIAC			
<b>MECHANICAL</b>				
Shade Diameter	Ø9.0 in.		Ø15.6 in.	
Product Weight	1.7 lb (0.8 kg)		3.7 lb (1.7 kg)	
Finish	Black or Bronze (as ordered)			
Product Materials	Polycarbonate Lens, Steel Housing			
Mount Type	Junction Box			
Input Connection	Pigtail			
Wire Gauge	18 AWG			
IP Rating	IP65			
Environmental Rating	Suitable for Wet Locations, Water-Resistant			
Rated Life (L70)	50000 Hours			
Ambient Operating Temperature	-20 to 40°C (-4 to 104°F)			

## Wiring Diagram

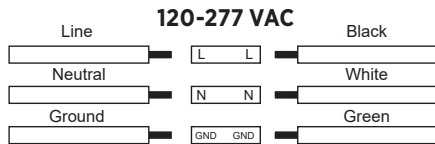


## Gooseneck Wall Light

Outdoor LED Barn Light Specifications

### Dimensional Drawings

B350003-12W-xKx

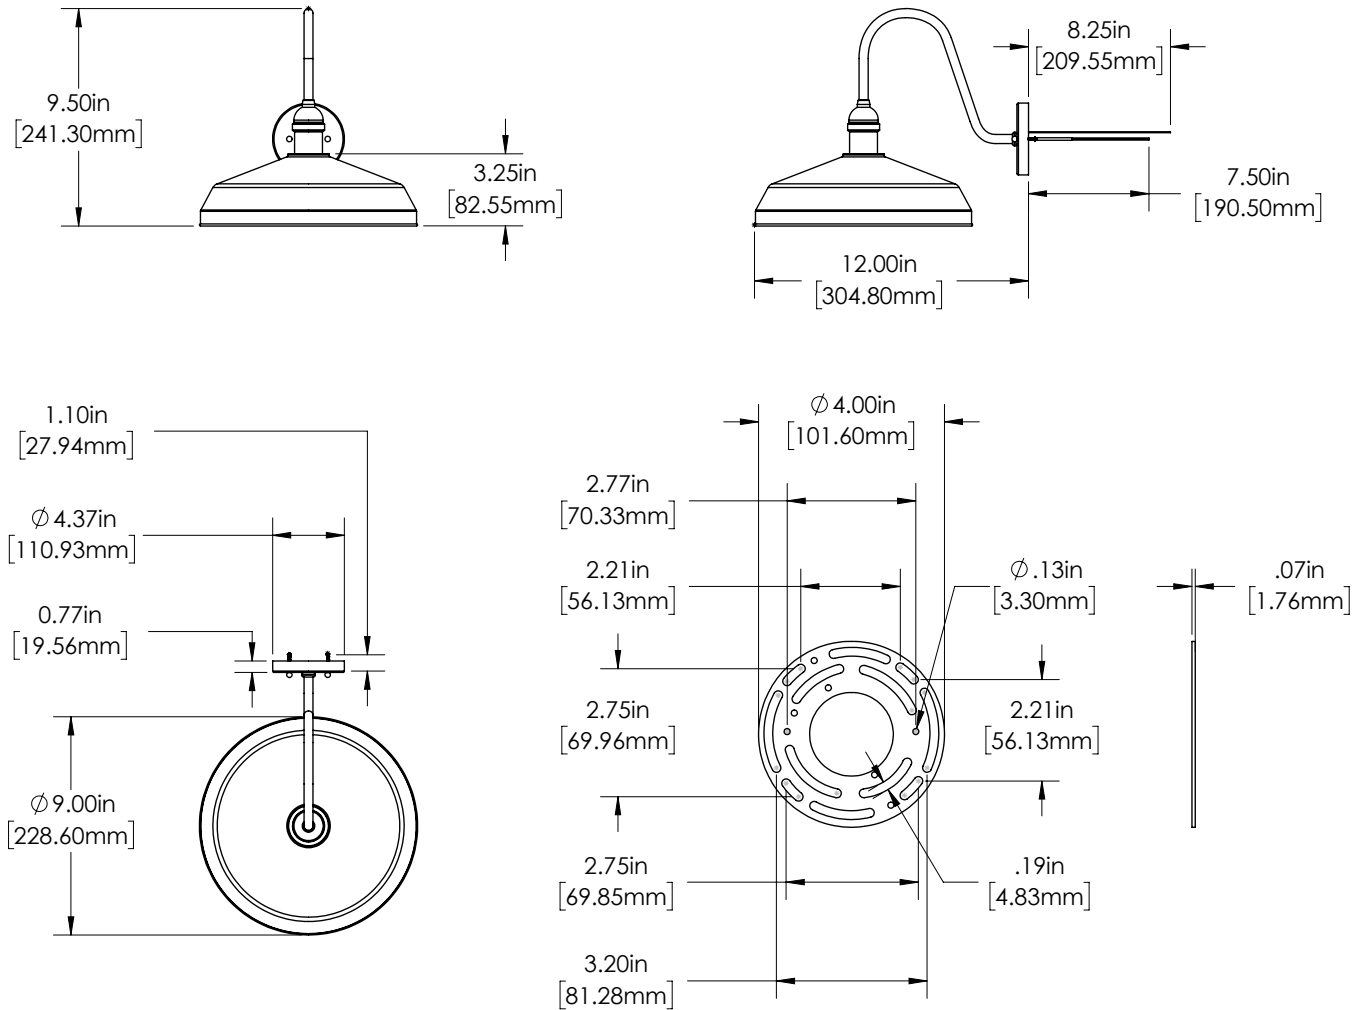

## Gooseneck Wall Light

Outdoor LED Barn Light Specifications

### Dimensional Drawings

B350003-20W-xKx

