superbrightleds.com | Even-Glow®

Project _____ Date _____

Notes _____

Even-Glow COB LED Strip Lights

Free Cutting Single White COB Strip Specifications

Voltage 24 VDC | Free Cut | COB LEDs | High CRI 90+ | 5 yr WARRANTY

Available Models[1]

- ☐ STN-B-A27K90-O2A-8Z5M-24V
- ☐ STN-B-A30K90-O2A-8Z5M-24V
- ☐ STN-B-A40K90-O2A-8Z5M-24V
- ☐ STN-B-A50K90-O2A-8Z5M-24V

SAMPLE PART NUMBER BREAKDOWN **STN-B-A27K90-O2A-8Z5M-24V**

Series	Strip Type	CCT	CRI	LED Type	LEDs/Segment	IP Rating	Width	Density	Length	Voltage
STN-B	A	27K	90	O	2	A	08	Z	5M	24V
Indoor Only	Single White	27K: 2700K 30K: 3000K 40K: 4000K 50K: 5000K	90+	COB	2 LEDs/seg	IP20	8 mm	528 LEDs/m	5 meters	24 VDC

Overview

The Even-Glow® Series Free Cut COB LED strip light can be segmented virtually anywhere along the length for a precise length and fit. Constructed with copper running the length of the strip, the strip can be cut as close as every 4 mm for an exact edge-to-edge fit. This unique free-cut design, matched with high-density COB LEDs, produces a fully diffused, smooth line of light for applications where you need precise lengths for the perfect fit. This low-profile tape light has an 8 mm width with 160 LEDs per foot, delivering up to 277 lm/ft with 90+ high CRI lighting for quality color rendering. Install using the adhesive on the back of the strip light.

Features

- Free cutting for precise length and fit with minimal waste
- COB LEDs create an uninterrupted dotless line of light
- High density 160 LEDs/ft strip delivers up to 277 lm/ft
- 90+ high CRI for accurate color rendering

Product Details

- Class 2 Max Run: 24.6 ft (7.5 m)
- Strip Width: 8 mm
- 0-100% PWM dimmable
- 3M™ adhesive backing
- Connection: pigtail
- 24 VDC input

Certifications and Compliances

- UL Listed - UL 2108 (IFDR)
- CE Compliant

UL® LISTED CE

Applications

- Architectural Reveals
- Closets
- Custom Millwork
- Display Cases
- Furniture Lighting
- Models and Exhibits
- Outdoor Signs
- Retail
- Shelf Lighting
- Stair Railings and Treads
- Under-Cabinet Lighting
- Vehicle Interiors

Warranty

- 5-year warranty

T 866.811.5550 | **F** 314.972.6202
https://www.superbrightleds.com
email: commercial-sales@superbrightleds.com

[1]Contact customer service if interested in other options.

Rev. V1.0 Date: 09/01/2026

Specifications are subject to change without notice

superbrightleds.com | Even-Glow®

Even-Glow COB LED Strip Lights

Free Cutting Single White COB Strip Specifications

Installation Instructions

1. Plan Your Layout

Identify COB strip placement, including how long each run will be and where to place the power supply. Depending on how evenly you want the light to appear, decide on a straight run, center feed, loop-back, or multi-leg. Hidden placements like under cabinets or inside coves produce indirect illumination for ideal lighting results.

2. Match the Power Supply

First, calculate the total strip wattage by multiplying the total strip length by the power used per foot for the total strip wattage. Next, use the following formula to determine the minimum necessary wattage of your power supply

Total Strip Wattage / 0.80 = Minimum Power Supply Wattage

Round up to the nearest wattage, and this number will provide you with the 20% wattage overhead required to maintain power supply longevity.

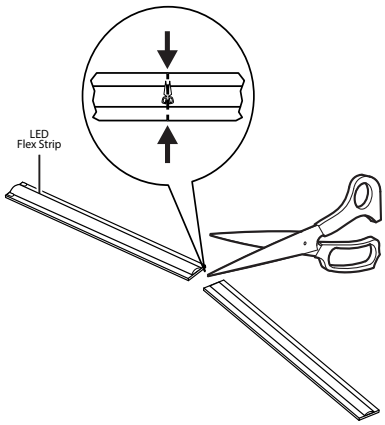

3. Cutting the Strip

If you need to cut the strip to a custom length, unroll the strip and use sharp scissors to cut anywhere on the strip ensuring to maintain a minimum segment length of 3.8 milimeters or 0.15 inches. Make sure the strip is not powered when cutting.

4. Connecting the Strip (Solderless or Soldering)

To connect cut sections of LED strips to a power supply or controller, wires can be soldered directly to the copper pads or solderless connectors may be used as an alternative. To use a solderless connector, open the connector, then slide in the cut end of the strip so the copper pads line up with the contacts inside. Ensure the connector is oriented correctly so the contacts pierce through the top of the strip. Close the connector to lock it in place. Use jumper connectors instead of bending the strip for corners or gaps.

Note: *Illustrations show wiring for single-color strip.*
Follow specific wiring diagram for strip and controller type.

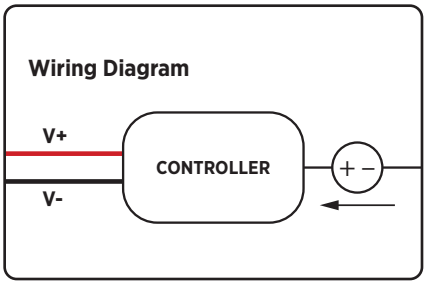

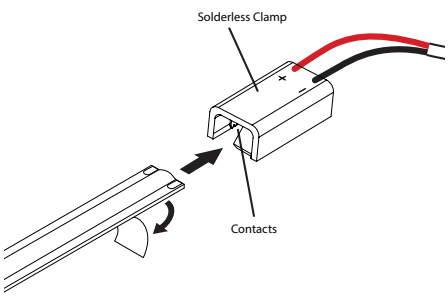

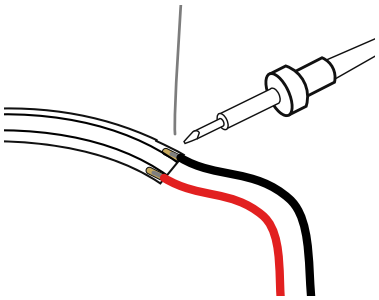

Typical Installation Example

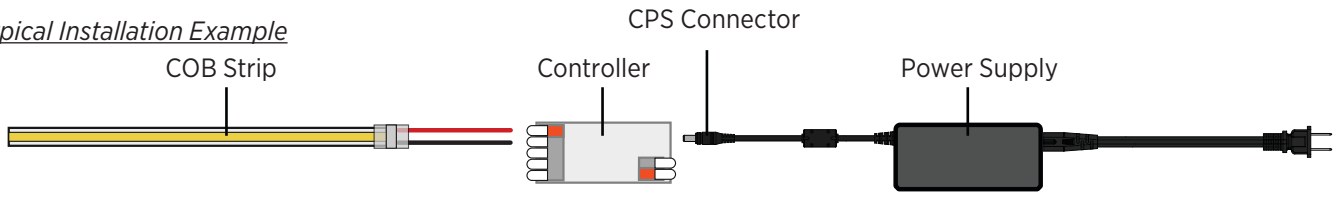

T 866.811.5550 | **F** 314.972.6202
https://www.superbrightleds.com
email: commercial-sales@superbrightleds.com

Rev. V1.0 Date: 09/01/2026
Specifications are subject to change without notice

Installation Instructions (cont.)

5. Extend the Wiring

Use the lowest gauge wire that's practical for your setup, based on the total current draw and length of the run. As a general guideline, 22 AWG is suitable for short, low-power runs, while 18 AWG or lower is recommended for longer runs or higher-powered strips. Keep the wiring short where possible and double-check polarity. Longer runs can lead to voltage drop and dimming at the far end of the strip.

Extended Power Wire Installation Example

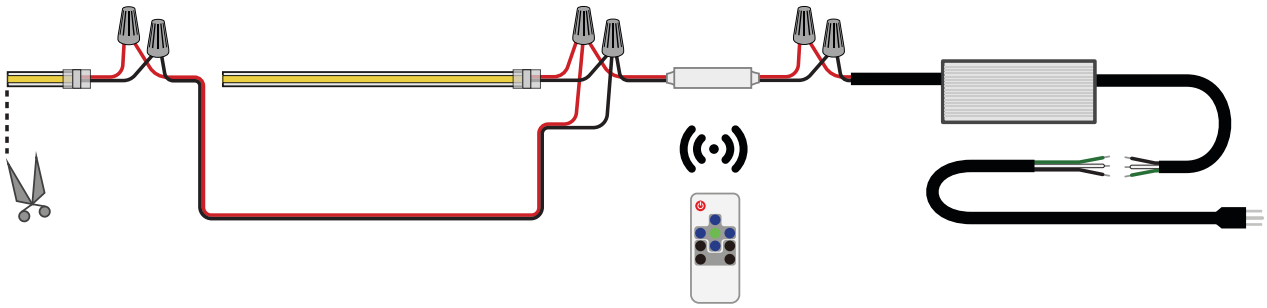

Straight Run Layout

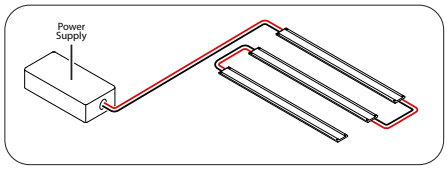

Center Feed Layout

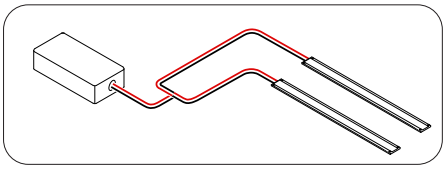

Loop-back Layout

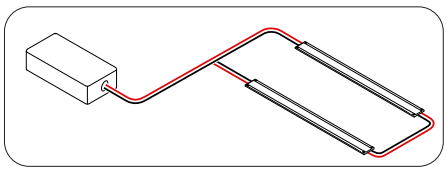

Multi-leg Layout

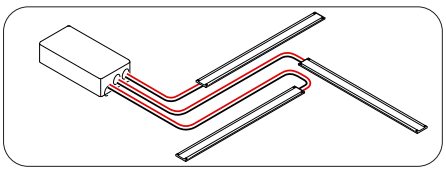

Voltage Drop

As current travels through the strip, resistance in the circuit causes a drop in voltage over the length of the strip, leading to dimmer light at the far end. Wire length and total power draw of the circuit influence the amount of voltage drop. To reduce it, keep wire lengths short, use thicker gauge wire, or split the power feed (center-feed or loop-back).

6. Prepare the Surface

Wipe the mounting area with alcohol or another cleaner that removes dust, oils, and residue. The strong 3M™ adhesive backing is intended for a single application.

7. Connect to Power and Test

Connect the wires from the strip or connector to the output side of the power supply or controller. Match the positive and negative sides. If you're unsure, use a multimeter. If using a dimmer or switch, install it according to the product's installation instructions. Before mounting, test the strip to make sure all sections light up properly and there are no connection issues.

8. Mount the Strip

Peel the paper from the adhesive backing and press the strip firmly into place. Work slowly from one end to the other to avoid bubbles or wrinkles. To prevent damage to the circuit, avoid bending the strip sharply or folding it over itself. Use flexible connectors for any sharp turns or difficult areas.



superbrightleds.com | Even-Glow®

Even-Glow COB LED Strip Lights

Free Cutting Single White COB Strip Specifications

SPECIFICATIONS				
Model | STN-B	**-A27K90-O2A-8Z5M-24V**	**-A30K90-O2A-8Z5M-24V**	**-A40K90-O2A-8Z5M-24V**	**-A50K90-O2A-8Z5M-24V**
PHOTOMETRIC				
Color Temperature	2700K	3000K	4000K	5000K
Lumens per Foot	218 lm/ft	238 lm/ft	277 lm/ft	277 lm/ft
Efficacy	55 lm/W	60 lm/W	70 lm/W	70 lm/W
CRI	90+			
Beam Angle	135°			
ELECTRICAL				
Operating Voltage	24 VDC			
Current Draw per Foot	165 mA/ft			
Current Draw	2.7 A			
Wattage per Foot	3.96 W/ft			
Wattage	65 Watts			
Dimmer Type	PWM			
MECHANICAL				
LED Density	160 LEDs/ft			
LEDs per Segment	2			
Minimum Cut Length*	35mm (1.38in.)			
Max Run (Class 2)	24.6 ft (7.5 m)			
Length	16.4ft (5m)			
Strip Width	8mm (0.31in.)			
LED Type	COB (chip-on-board)			
LED Lifetime	50000 hours			
Input Connection Type	Pigtail			
ENVIRONMENTAL				
IP Rating	IP20			
Environmental Rating	Suitable for Dry Locations, Indoor Only			
Ambient Operating Temperature	-20 to 45 °C (-4 to 113 °F)			

*Based on min. cut segment length. Number of LEDs per segment will vary.

T 866.811.5550 | **F** 314.972.6202
https://www.superbrightleds.com
email: commercial-sales@superbrightleds.com

Rev. V1.0 Date: 09/01/2026
Specifications are subject to change without notice

Even-Glow COB LED Strip Lights

Free Cutting Single White COB Strip Specifications

Dimensional Drawings

STN-B-AxK90-O2A-8Z5M-24V

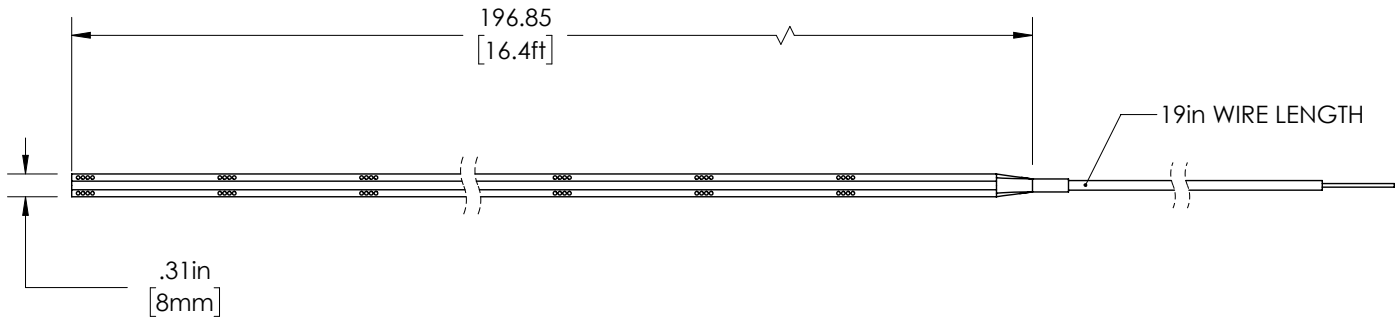

Strip Flexibility



Bending strips at sharp angles will damage circuit traces and void warranty.



Twisting strips will damage circuit traces and void warranty.



Bending strips on horizontal plane will damage circuit traces and void warranty.



Minimum bending radius ≥ 1.18in. [30mm]

T 866.811.5550 | **F** 314.972.6202
https://www.superbrightleds.com
email: commercial-sales@superbrightleds.com

Rev. V1.0 Date: 09/01/2026
Specifications are subject to change without notice