superbrightleds.com

User Manual

JHL-9DRL

Important: Read all instructions prior to installation.

9” Headlights for Jeep Wrangler JL and Gladiator JT

9DRL-L

Included Parts

(2) 9” headlights for Jeep Wrangler JL or Gladiator JT
(2) DRL Add-A-Circuit modules
(1) Wiring harness

Specifications

Model	9DRL-L	9DRL-S
Fitment	2018+ Jeep Wrangler JL, 2020+ Jeep Gladiator JT	
Operating Voltage	12 VDC	
IP Rating	IP67 waterproof	
Certifications	DOT Compliant, FMVSS 108 - HL, P	
Warranty	2-year	

Pre Installation Instructions

1. Read all safety notes and mounting guidelines before installing the product.
2. Verify that all parts are present and complete.
3. Verify that all power supply and charging systems comply with the specified voltage limits for the light.
4. Turn off the vehicle and disconnect the battery.

Installation Instructions

Required Tools[1]

- Automotive clip removal tool or flat head screw driver
- Socket wrench with 10 mm socket
- Wire crimper

Use the included Add-A-Circuit to quickly and safely tap power from the fuse panel for standard installation, where the lights turn on and off automatically.

Fuse location F52 (Cigarette lighter position) is recommended.

Connect the power lead wire to a switch for the custom control of the DRL Halo lights. If you have an existing switch bank (S-Pod, etc.), you can control the LEDs and leave the lights on when your Jeep is parked.

Add-A-Circuit module

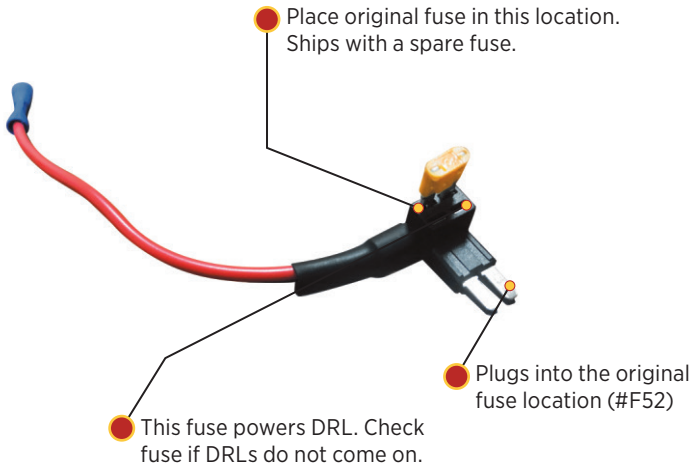

[1] Note that required tools may vary by model and trim level. Subject to change without notice.

4400 Earth City Expy, St. Louis, MO 63045 • 866-590-3533 • superbrightleds.com

superbrightleds.com

User Manual

Important: Read all instructions prior to installation.

JHL-9DRL

Installation Instructions

❶ Remove the plastic grille fasteners using the trim removal tool or a flat head screw driver. Pull firmly to remove grille.

❷ Detach the stock headlight assembly by removing three bolts with the 10 mm socket wrench and disconnecting the wire harness.

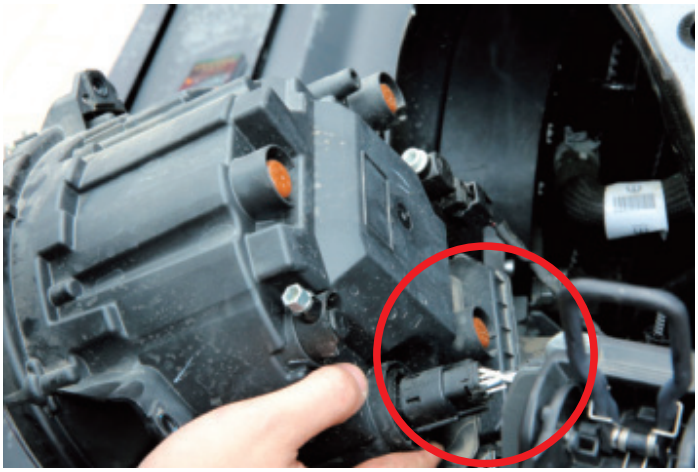

❸ Plug the LED headlight into the wiring harness.

❹ Allign headlight mounting tabs for the side you are installing (driver or passenger) and re-install the three 10 mm bolts.

[1] Note that required tools may vary by model and trim level. Subject to change without notice.

4400 Earth City Expy, St. Louis, MO 63045 • 866-590-3533 • superbrightleds.com

2yr WARRANTY

Important: Read all instructions prior to installation.

Installation Instructions

❺ Attach the DT connectors from the included wiring harness to the headlight assemblies. The short cable goes to the passenger side, the long to the drivers side.

❻ Plug the Add-A-Circuit module into the # F52 fuse location. Place the positive (red) end of the wire harness lead into the module and crimp in place. Ground the negative (black) lead to the body of the vehicle.

❼ Use cable ties to secure any loose cables. Reconnect battery and check operation before reinstalling the grille to complete the installation.