Light efficiency:

151 Lumen/Watt

Light quality:

CRI: 81.9

Color temperature:

5092 K

Output: 23320 lm
Peak: 7450 cd

Power: 154.6 W
PF: 1.0

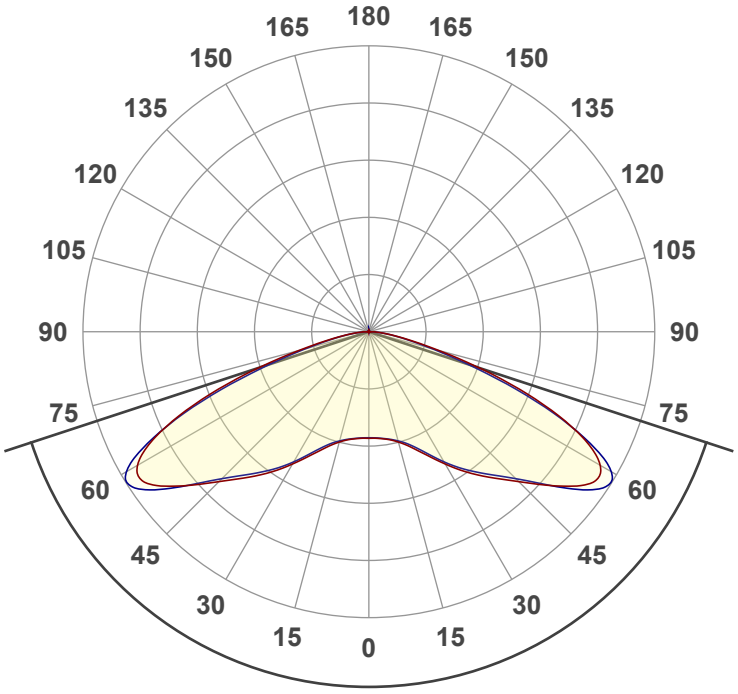

Beam angle **143.7°**

Product name:
PLLD4-50K150W-xLT5BR1

Date and time:
7/14/2023 10:56:55 AM

CIE 1931
x: 0.343
y: 0.353

Spectra

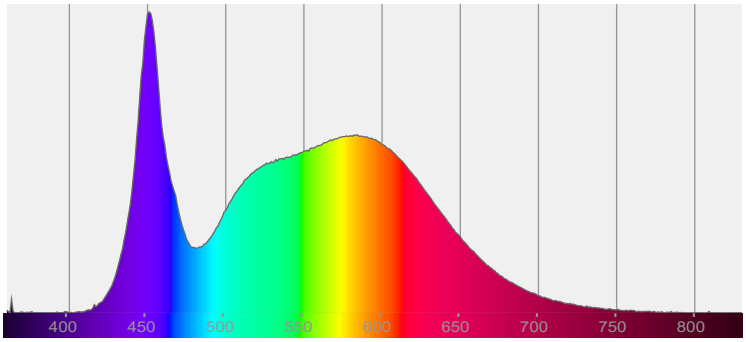

Power

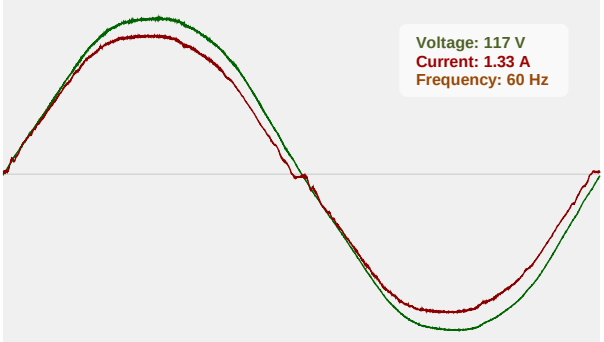

T 314.743.3067
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/

Color Specifications

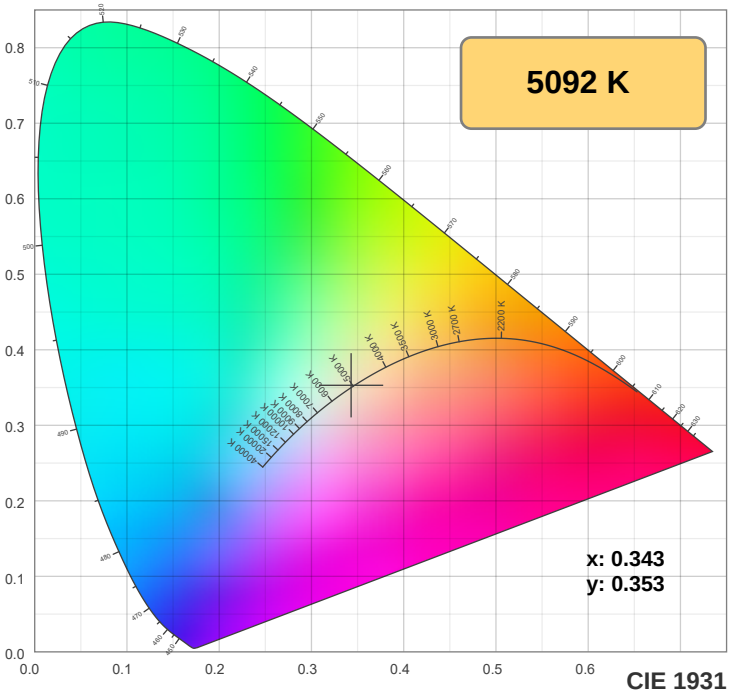

CIE 1931

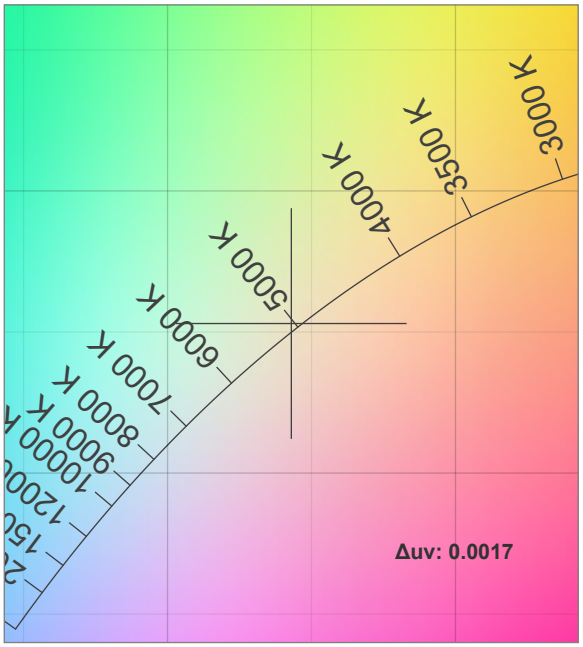

CIE 1931 ZOOM

TM30: 82.5

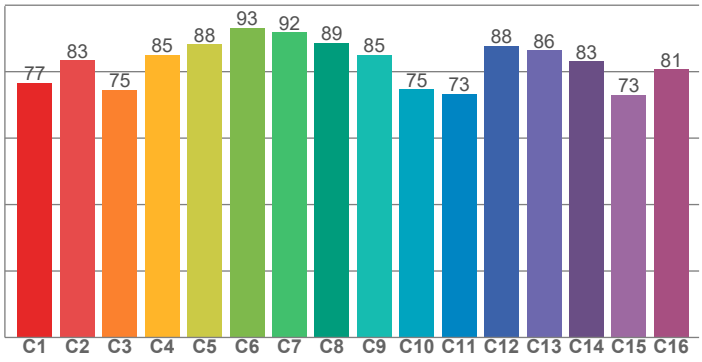

CRI: 81.9 (R1-R8)

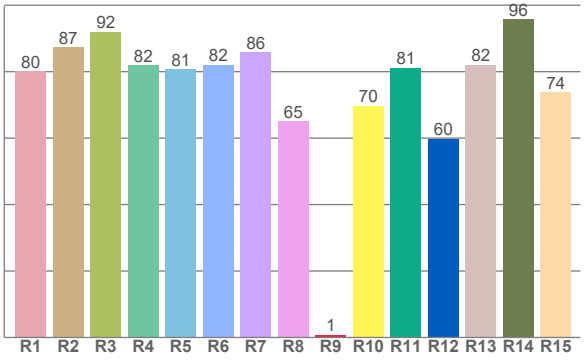

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.1	87.4	92.0	81.9	80.8	82.1	85.8	65.1	0.8	69.8	81.2	59.8	82.1	95.8	73.7

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
76.7	83.4	74.6	85.0	88.2	93.2	91.8	88.7	85.0	74.6	73.3	87.8	86.4	83.1	73.1	80.7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
81.6	97.9	74.6	71.1	78.2	81.4	84.3	88.4	96.3	84.4	80.0	78.7	78.9	67.7	72.9

CQS: 79.4

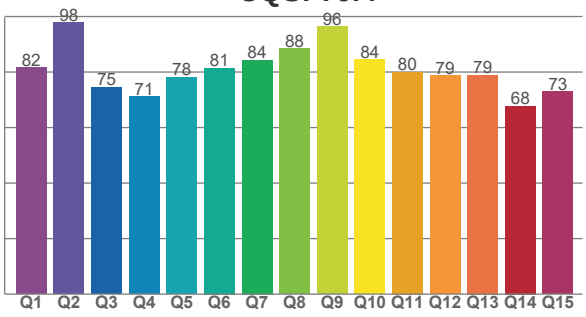

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5092 K	81.9	0.8	82.5	95.8	79.4	0.343	0.353	0.209	0.323	0.0017

T 314.743.3067
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/

TM30 Report

Rf 82.5

Fidelity index Rf

Rg 95.8

Gammut index Rg

		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	77	-13%	-1%
2	83	-9%	7%
3	75	-4%	13%
4	85	1%	9%
5	88	2%	5%
6	93	3%	-2%
7	92	-3%	-4%
8	89	-7%	0%
9	85	-9%	6%
10	75	-6%	14%
11	73	1%	16%
12	88	5%	6%
13	86	9%	-5%
14	83	5%	-9%
15	73	3%	-23%
16	81	-6%	-10%

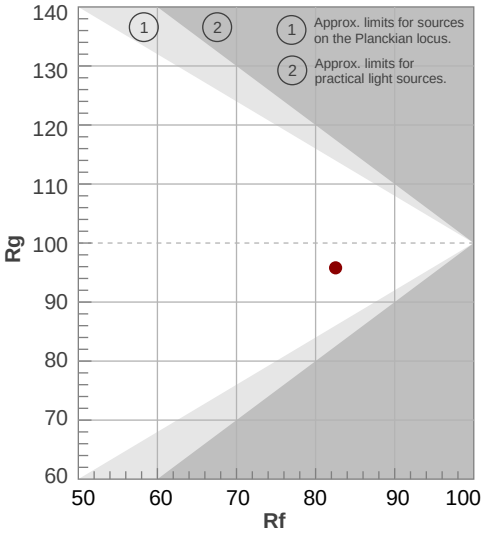

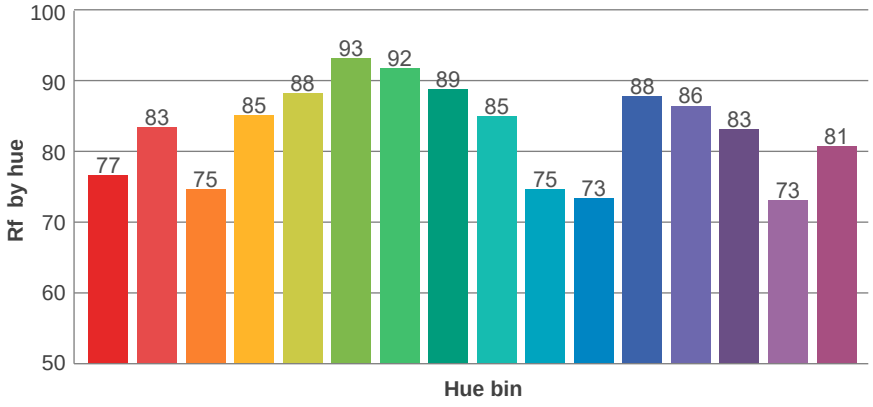

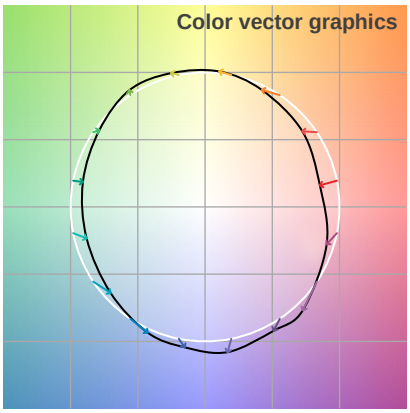

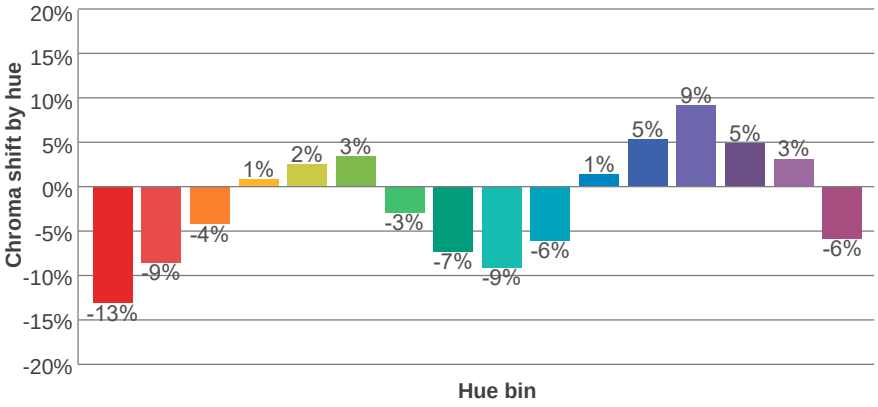

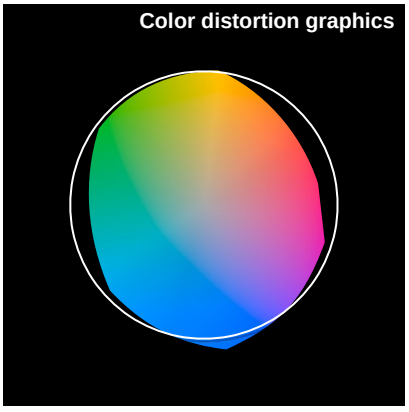

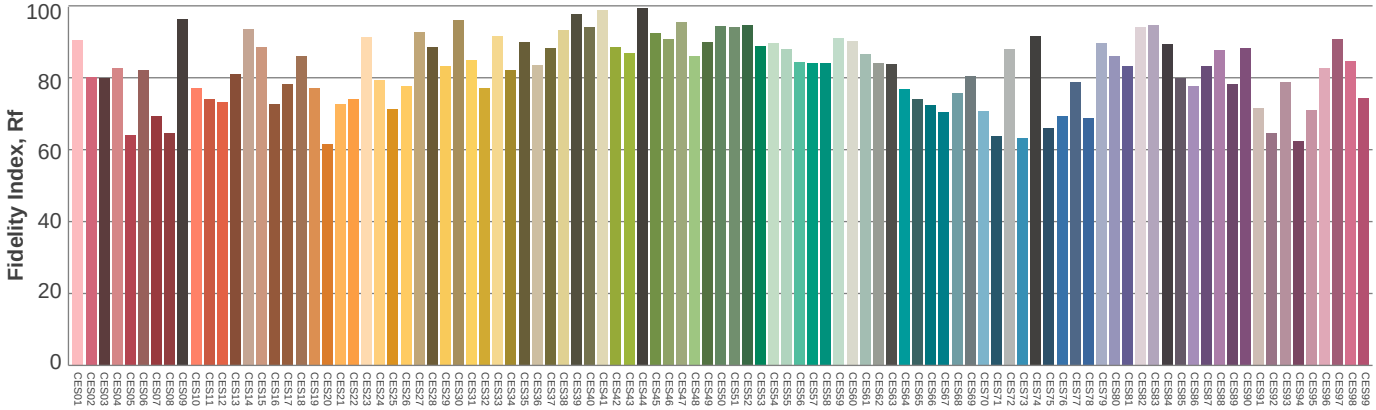

T 314.743.3067
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/

Illumination

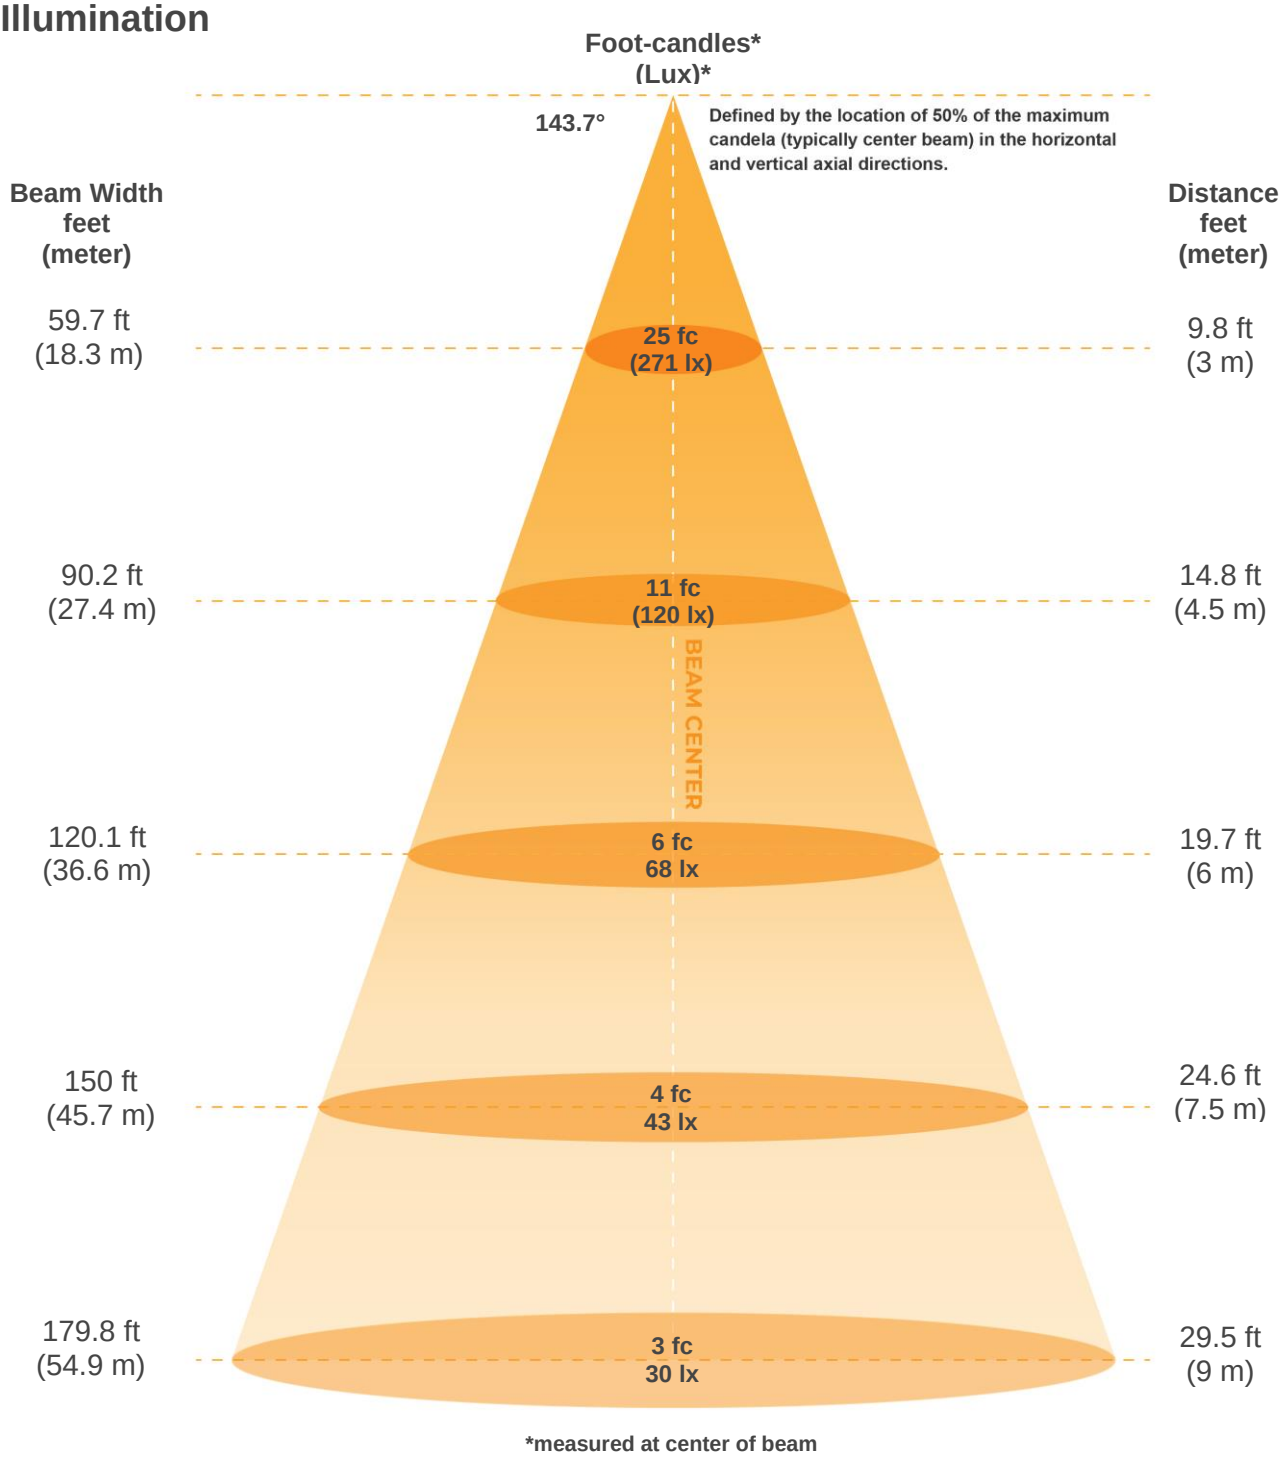

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2438lx	610lx	271lx	152lx	98lx	68lx	50lx	38lx	30lx	24lx	20lx	17lx	14lx	12lx	11lx	10lx	8lx	8lx	7lx	6lx
226.5fc	56.6fcd	25.2fcd	14.2fcd	9.1fcd	6.3fcd	4.6fcd	3.5fcd	2.8fcd	2.3fcd	1.9fcd	1.6fcd	1.3fcd	1.2fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.6fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
143.7°	**164.2°**	**174.6°**	**61.6%**	**28.4%**

T 314.743.3067
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/

ISO Diagrams

ISO candela diagram

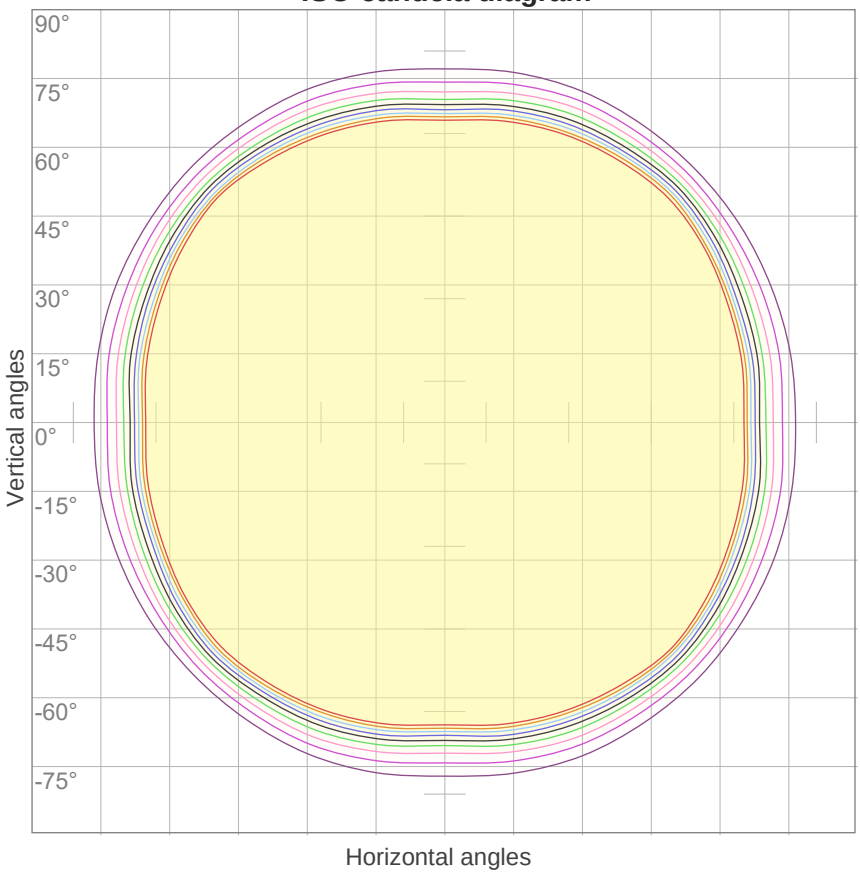

10%	244 cd
20%	488 cd
30%	731 cd
40%	975 cd
50%	1219 cd
60%	1463 cd
70%	1707 cd
80%	1951 cd
90%	2194 cd

Conditions:

Number of c-planes: 16

Candela at center: 2438 cd

ISO lux diagram

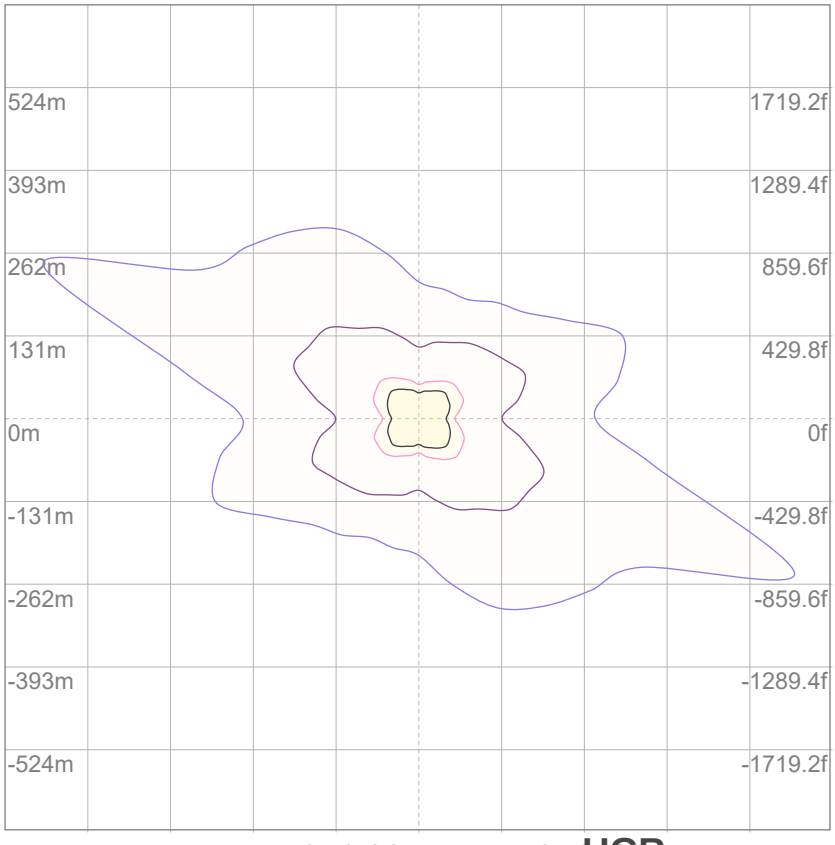

3%	0.731 lx
5%	1.22 lx
10%	2.44 lx
30%	7.31 lx
50%	12.2 lx

Conditions:

Number of c-planes: 16

Lux at center: 24.4 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

UGR

T 314.743.3067
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/

Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	106	100	95	90	103	98	93	89	93	89	86	89	86	83	86	83	80	78
2	94	83	75	68	91	81	74	67	78	71	65	74	69	64	71	66	62	60
3	83	70	60	52	80	68	59	52	65	57	51	62	55	50	59	54	49	46
4	74	60	49	41	72	58	48	41	56	47	40	53	45	39	51	44	39	36
5	67	52	41	33	65	50	40	33	48	39	32	46	38	32	44	37	31	29
6	61	45	35	27	59	44	34	27	42	33	27	40	32	26	38	31	26	23
7	56	40	30	23	54	39	29	22	37	29	22	36	28	22	34	27	22	19
8	51	36	26	19	49	35	26	19	33	25	19	32	24	19	31	24	19	16
9	47	32	23	17	46	32	23	16	30	22	16	29	22	16	28	21	16	14
10	44	29	20	14	43	29	20	14	28	20	14	27	19	14	26	19	14	12

Luminaire budgetary diagram

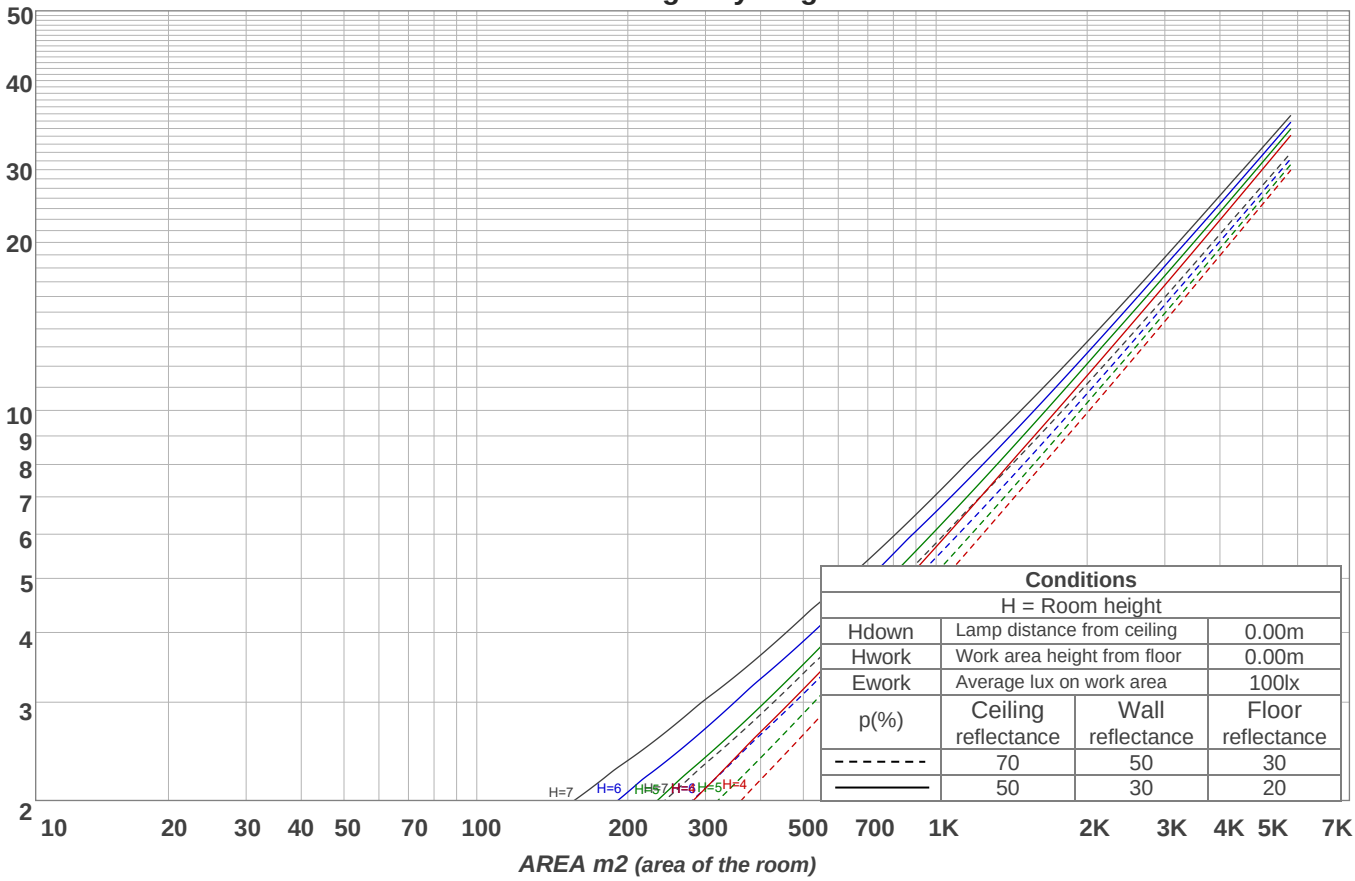

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
236 lm	749 lm	1455 lm	2480 lm	3781 lm	5659 lm	5888 lm	2517 lm	455 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
14.6 lm	14.1 lm	15.7 lm	15.4 lm	14.3 lm	11.7 lm	8.60 lm	4.91 lm	1.56 lm

T 314.743.3067
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/

Stabilization

Warmup curve

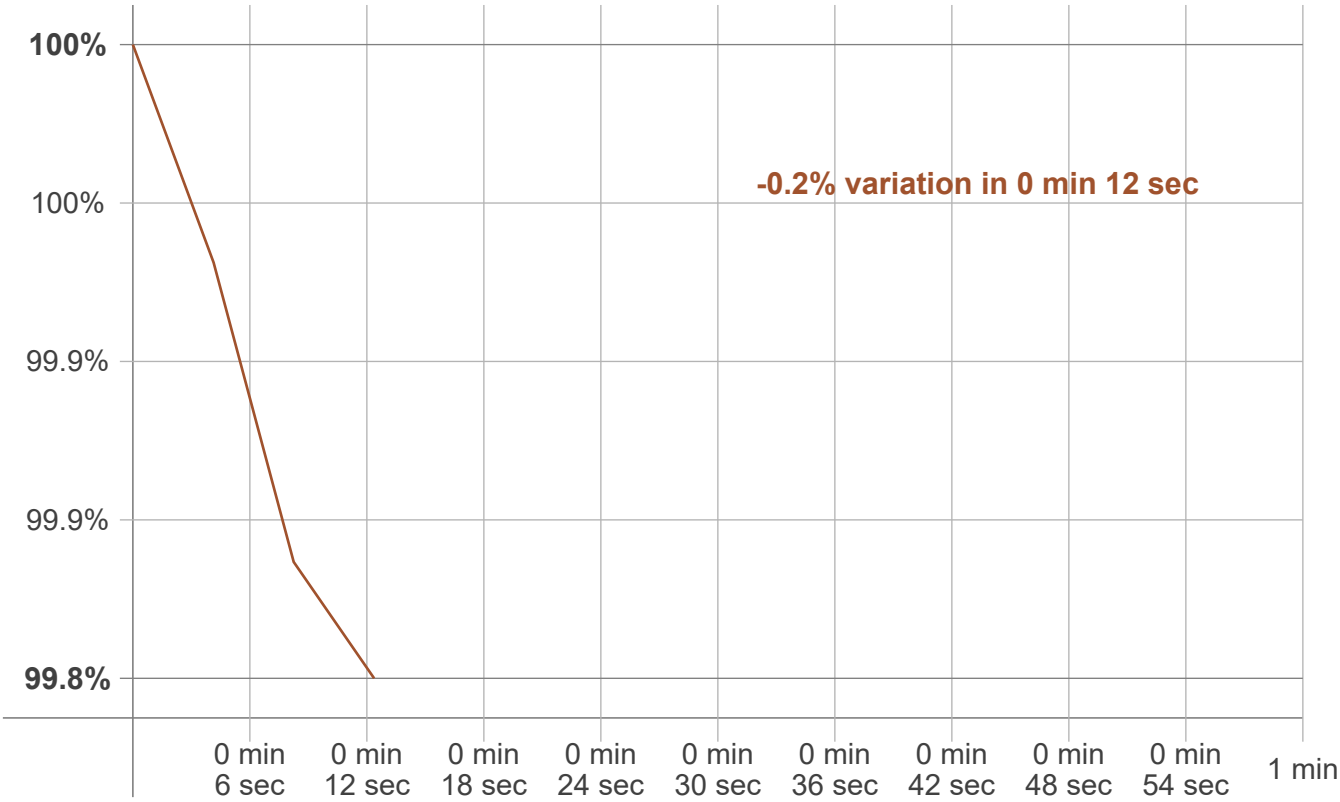

Warmup result

Warmup time:	**Not completed**
Warmup variation	**-0.2%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2.0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
5090 K	+2 K	5092 K

Output change

Output start	Output change	Output end
23353 lm	-33 lm	23320 lm

T 314.743.3067
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/

Flicker Specifications

Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

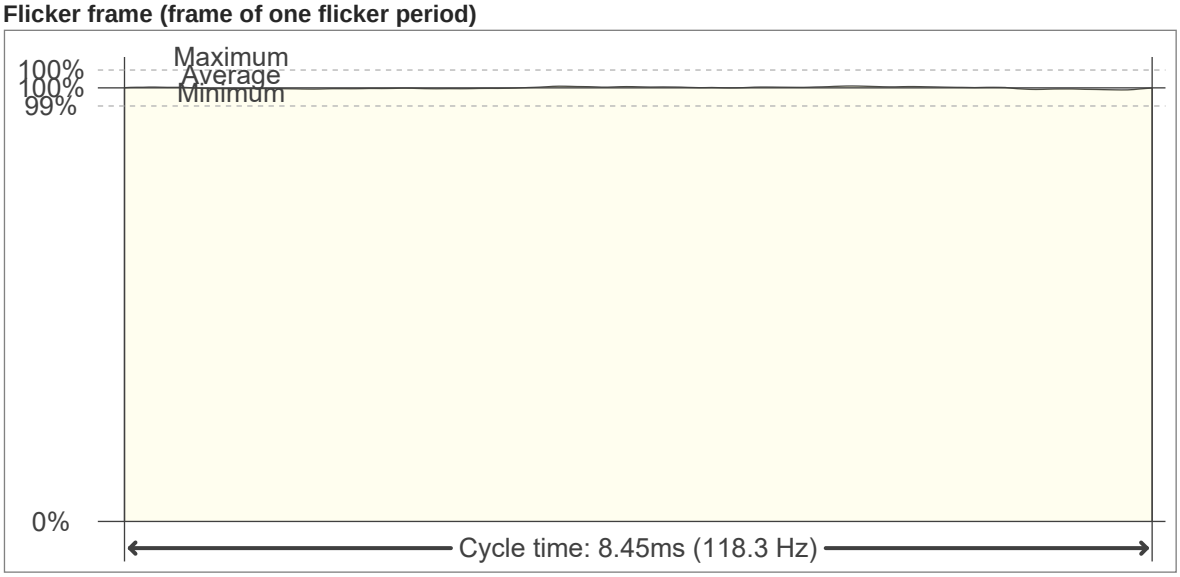

Flicker FFT (frequency scope of flicker curve)

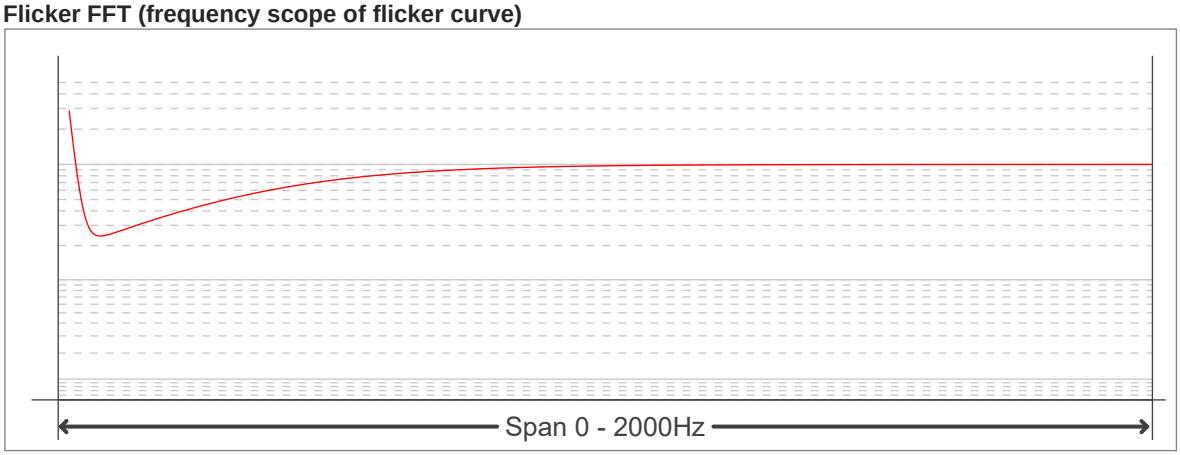

Flicker results:

Flicker frequency:	**118.34 Hz**
Flicker index:	**0**
Flicker percentage:	**1.06 %**
SVM: (Visual flicker)	**0**

Flicker conditions:

Sample rate:	**20000 samples/second**

T 314.743.3067
F 314.972.6202
email: commercial-sales@superbrightleds.com
www.superbrightleds.com/