

Important: Read all instructions prior to installation.

High Temperature Rated Linear High Bay Light



FY-HB-900C-200WNC-L50K504D623

Included Parts

- 1 - High Bay Light
- 1 - Suspension Kit

Optional Accessories

- 1 - Surface Mount Kit (FY-NSF-SMB)

Specifications

Environmental Specifications	FY-HB-600C-100WNC-L50K336D621	FY-HB-900C-200WNC-L50K504D623	FY-HB-600C-160WNC-L50K336D622
Operating Temperature	-22°–149° F (-30°–65° C)		-40°–122° F (-40°–50° C)
IP Rating	IP65		IP69K

Check product label for specific electrical specifications related to installation.
Improper installation will void warranty.

Safety and Notes

- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- Do not attempt to open the LED high bay light for any reason.
- Metal surface is hot while in operation, please don't touch fixture before it cools down adequately.


Installation

Suspended Mounting

1. Turn supply power off.
2. Measure the distance needed and mount cables.
3. Hang light by attaching cable to the eye bolts.
4. Making all wiring connections.

Optional Surface Mounting

1. Turn supply power off.
2. Measure the distance needed and secure the mounting brackets.
3. Attach the light to the mounting brackets.
4. Making all wiring connections.

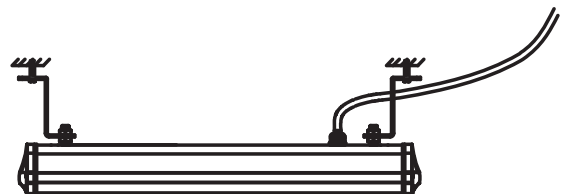

¹NSF certified applies to only FY-HB-600C-160WNC-L50K336D623 model.

