

**Important: Read all instructions prior to installation.**

## LED Flush Mount Down Light

### Specifications


Model	LPR5D-K1-SW5A10	LPR7D-K1-SW5A15	LPR9D-K1-SW5A18	LPR13D-K1-SW5A24
Size	5.5"	7.5"	9"	12.8"
Voltage	120 VAC			
Wattage	10 W	15 W	18 W	24 W
Beam Angle	120°			
Operating Temperature	-4°–113° F (-20°–45° C)			
Environmental Rating	Suitable for Wet Locations			



### Safety and Notes


- Product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support weight of the fixture. Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

### Wiring Diagram

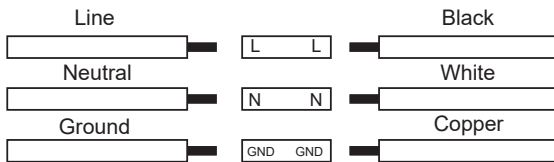

### Installation Instructions

1. Remove supply power at the breaker.
2. Attach mounting bracket to junction box, ensuring it is flush with ceiling.
3. Make all wiring connections according to the wiring diagram.  
Note: Select desired CCT on back of down light.

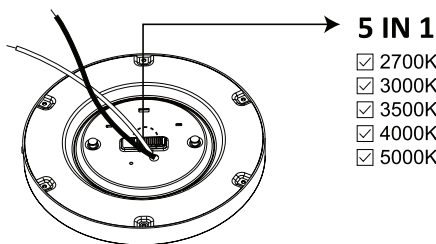

4. Align two screw points on fixture to the holes on the mounting bracket. Rotate clockwise to secure.
5. Reapply supply power.

