

Important: Read all instructions prior to installation.


Dual Side Type A T12 LED Tube

Safety and Notes

- Product should be installed in accordance with all applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into the lamp when illuminated.
- For use with electronic ballasts only. See list below.

Specifications

Specifications	T12A-xK36W-8S
Wattage	36 W
Operating Temperature	-4–104°F (-20–40°C)
Lens Material	polycarbonate
IP Rating	IP20
Dimmable	No
Connection Type	FA8

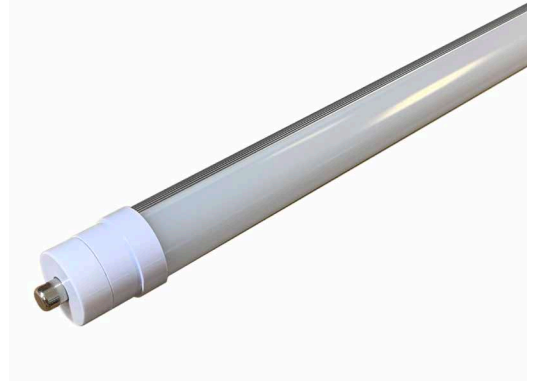


Ballast Compatibility

Ballast Compatibility	T12A-xK36W-8S		
Ballast Type	GE Ultramax	Sylvania	Osram
Ballast Part Number	GE259MAX-G-N-DIYB	QHE 2X59T8/UNV ISL-SC	QTP 2X59T8/UNV ISN-SC

Installation Instructions

1. Remove power from fixture before replacing lamps.
 2. Assemble tube by connecting wires, then sliding tube together until lock pin is in place.
 3. Install tubes into fixture using magnet and center brace to support and align tube properly in fixture.
- Note: Make certain tube is rotated so that polycarbonate lens is facing down.

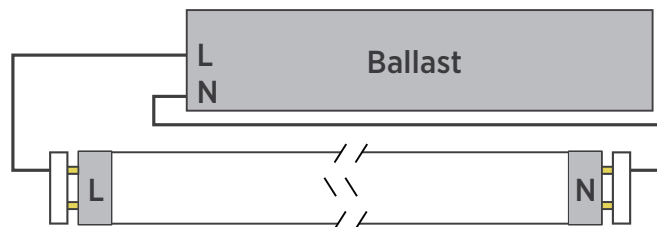

Dual-sided Type A Installation

