



Contractor-grade Plastic (Dimmable) A-Shape Lamps

8A19/CNG/827/FR/P/E26/D 4/4CT

Plastic A19 offering dimmability and a lifetime over 15,000 hours. Ideal for contractor-grade residential and multi-family spaces.

Product data


General Information		Power Consumption	
Cap-Base	E26 [Single Contact Medium Screw]	Lamp Current (Nom)	8 W
Nominal lifetime	15,000 hour(s)	Wattage Equivalent	90 mA
Switching Cycle	50,000	Starting Time (Nom)	60 W
Lighting Technology	LED	Warm-up time to 60% light	0.5 s
EU RoHS compliant	Yes	Power Factor (Fraction)	0.5 s
Light Technical		Voltage (Nom)	0.7
Color Code	827 [CCT of 2700K]	Temperature	
Luminous Flux	800 lumen	Ambient temperature range	-20 °C to 45 °C
Color Designation	Warm White (WW)	T-Case Maximum (Nom)	194 °F
Correlated Color Temperature (Nom)	2700 K	Controls and Dimming	
Luminous Efficacy (rated) (Nom)	100 lm/W	Dimmable	Only with specific dimmers
Color Consistency	<6	Mechanical and Housing	
Color rendering index (CRI)	80	Bulb Finish	Frosted
LLMF At End Of Nominal Lifetime (Nom)	70 %	Bulb Material	Plastic
Operating and Electrical		Bulb Shape	A19 [A 19mm]
Line Frequency	60 Hz		
Input Frequency	60 Hz		

Contractor-grade Plastic (Dimmable) A-Shape Lamps

Product Data	
Order product name	8A19/CNG/827/FR/P/E26/D 4/4CT
Order code	581751
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929003579504



Full product name	8A19/CNG/827/FR/P/E26/D 4/4CT
EAN/UPC - Case	50046677581751
EAN/UPC - Product/Case	046677581756

Dimensional drawing




Product	D	C
8A19/CNG/827/FR/P/E26/D 4/4CT	2-3/8 inch	4-1/8 inch

Photometric data

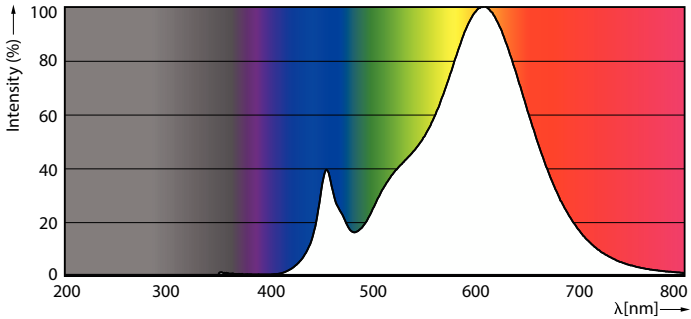

Spectral Power Distribution Colour


General uniform lighting - 8A19/CNG/827/FR/P/E26/D 4/4CT




Light Distribution Diagram

Contractor-grade Plastic (Dimmable) A-Shape Lamps

Lifetime

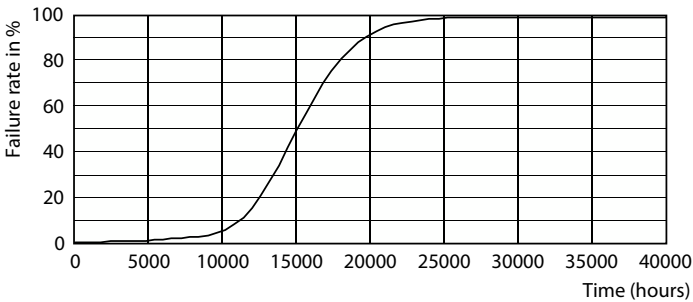

Life Expectancy Diagram - 8A19/CNG/827/FR/P/E26/D 4/4CT

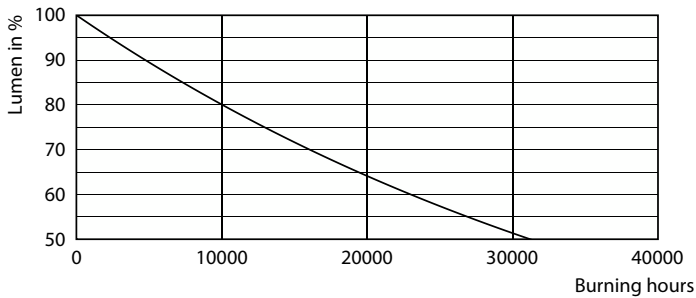

Lumen Maintenance Diagram - 8A19/CNG/827/FR/P/E26/D 4/4CT

