

Important: Read all instructions prior to installation.

Selectable CCT and Wattage Low Profile LED Wall Pack





WPLP-SW3B120-H-Y

Safety and Notes

- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures. Wiring/installation should not be attempted during inclement weather.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- Do not look directly into the lamp when illuminated.

Wiring Diagram

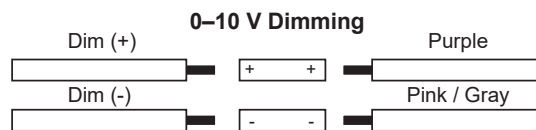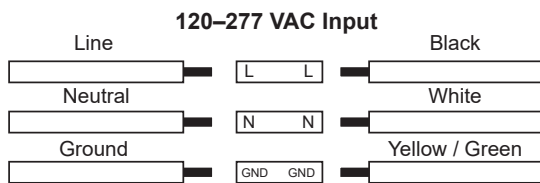



Specifications

Model	WPLP-SW3B120-H-Y
Operating Temperature	-40°-113° F (-40°-45° C)
IP Rating	IP65
Dimming	0-10 V

Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

CCT and Wattage Selection / Photocell Bypass

Remove plug on side of fixture to set field-selectable CCT and wattage and set photocell sensor to on or off.

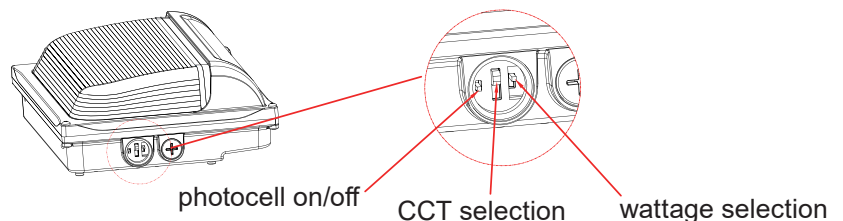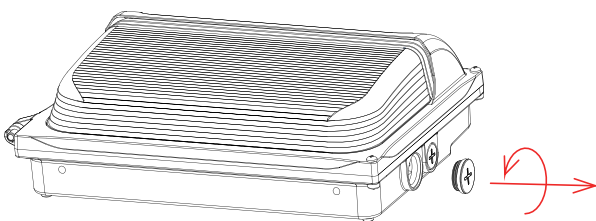

Important: Read all instructions prior to installation.

Selectable CCT and Wattage Low Profile LED Wall Pack

Installation

1. Remove supply power by switching off breaker.
2. Loosen screws holding front housing to rear housing.
3. Swing front housing out and lift up to remove it.
Note: Be careful not to damage glass lens.
4. Attach rear housing to wall/junction box. Sealant may be used as needed to prevent potential leaks.
5. Connect wiring.
6. Reinstall front housing.
7. Reapply power.
8. Remove switch cover plug and adjust wattage, CCT, and photocell settings.

