

Important: Read all instructions prior to installation.

GBL-xK20T8-x

Gooseneck Barn Light



GBL-40K20T8-L15SLWH

Safety and Notes


- Product should be installed and serviced in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

Specifications

Environmental Specifications	
Operating Temperature	-22°–122° F (-30°–50° C)
IP Rating	IP65

Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

Included Parts




AA:
Mounting Screws (2)
8-32UNC x 32
Length: 1.25" or 31.75 mm




BB:
Mounting Screws (2)
8-32UNC x 32
Length: 3/8" or 9.525 mm




CC:
Wire Nuts (3)
P4 (10 mm x 22 mm)



DD:
Screw Caps (2)
(Customization)

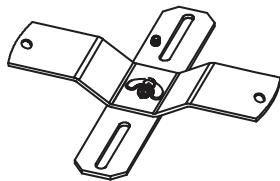

EE:
Mounting Bracket (1)
(Customization)

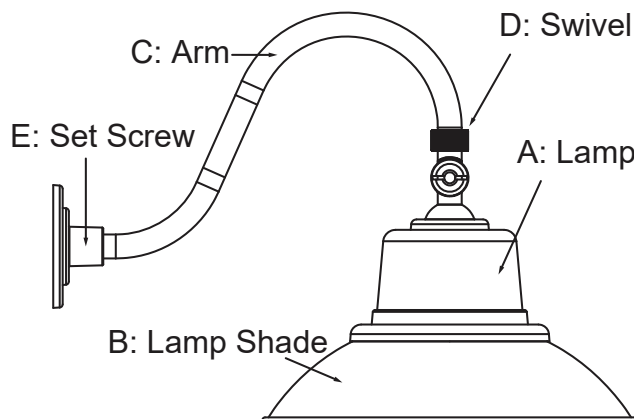

Rev Date: V3 04/06/2021

4400 Earth City Expy, St. Louis, MO 63045

• 866-590-3533

• superbrightleds.com



Important: Read all instructions prior to installation.

Gooseneck Barn Light

Installation

1. With supply power off, feed power wires from lamp (A) through arm (C). Tighten swivel (D) until snug. Do not over tighten.
2. Attach mounting bracket (EE) to junction box using mounting screws with washers (BB).
3. Connect wires as shown. Tuck all wiring into junction box.
4. Install one screw cap (DD) onto each threaded stud (AA). Place wall canopy over junction box and align holes with mounting bracket (EE). Insert threaded studs from the front of wall canopy into threaded holes in the mounting bracket. Tighten screw caps evenly.

Note: It is recommended that silicone caulk be applied around the edge of wall canopy to weatherproof.

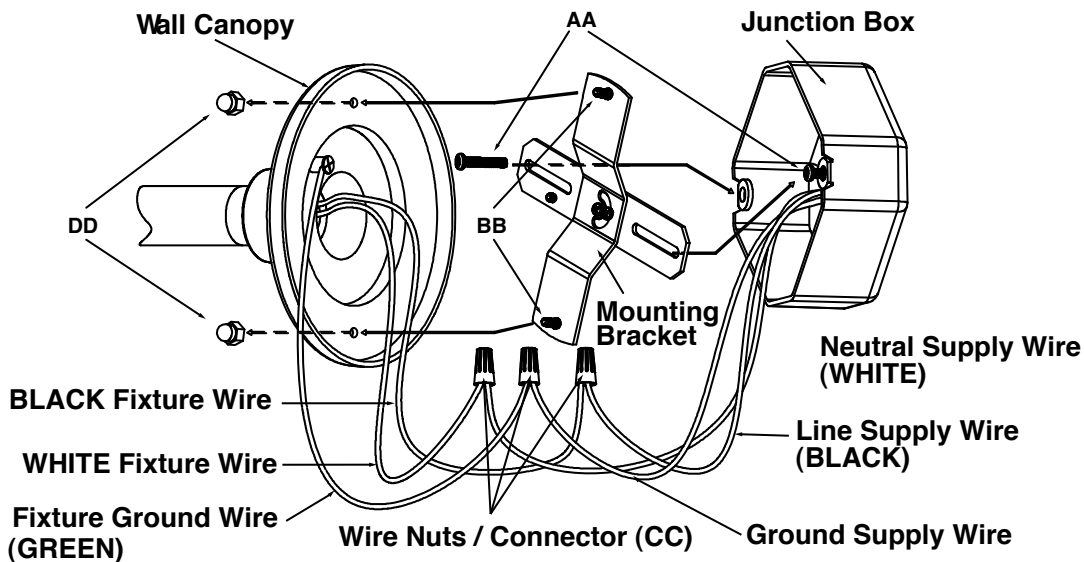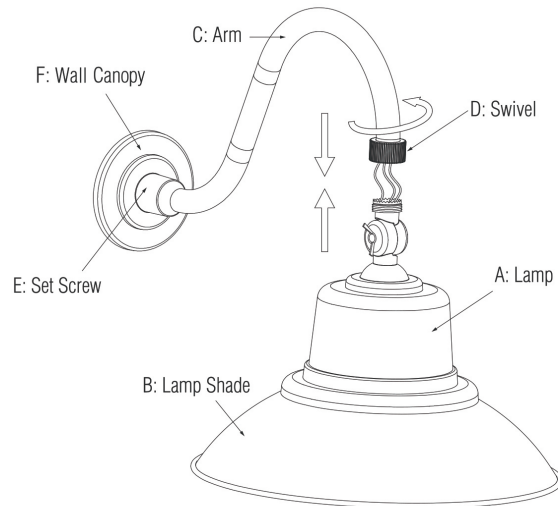

Angle Adjustment

Loosen butterfly bolt and swivel to adjust. Tighten when desired position is reached.

